



TYPES TP-LF AND BA-EL

VINYLUTM

TERMINAL -
POLYVINYLCHLORIDE
INSULATED,
LOCKING FORK TONGUE

600 VOLTS MAX. 105° C MAX

Type TP-LF is a variation of the Type TP design and employs a locking fork tongue for fast installation and security.

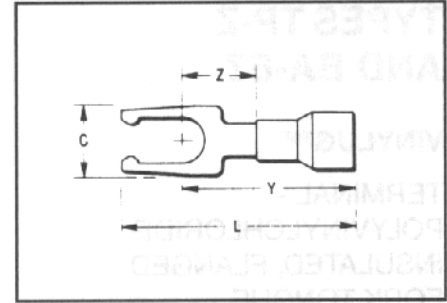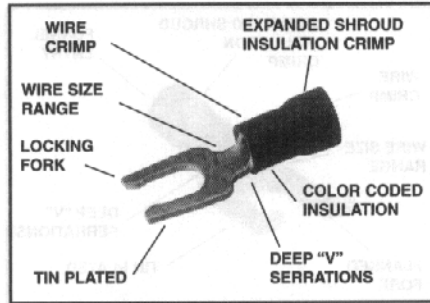

Features and Benefits

- Locking fork tongue design.
 - ◇ Allows fast installation—screw only has to be loosened for termination.
- Internal configuration of the fork.
 - ◇ Prevents the terminal from coming off the screw without applying a pulling force.
- Locking fork is made from a copper alloy.
 - ◇ Permits many installations while maintaining proper spring retention of forks.

CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER *	INSTALLATION TOOLING	TAPE MOUNTED CATALOG NO. 2000/Reel	INSTALLATION TOOLING	WIRE STRIP LENGTH
			C	L MAX.	Y MAX.	Z MIN.					
TP16-6LF	22-16 MAX. INSUL. DIA. ACCOM.: .145 COLOR CODE: Red	4-6	.28	.80	.66	.23	BA16EL6	PLIER TYPE: Y10-22 RATCHET TOOL: MR8-89-1 MR15	BA16EL6M	TFM WITH DFM3D-1 DIE	13/64"
TP16-8LF		6-8	.31	.86	.69	.26	BA16EL8		BA16EL8M		
TP16-10LF		8-10	.41	.95	.75	.31	BA16EL10		BA16EL10M		
TP14-6LF	16-14 MAX. INSUL. DIA. ACCOM.: .180 COLOR CODE: Blue	4-6	.28	.80	.66	.23	BA14EL6		BA14EL6M	TFM WITH DFM2D-1 DIE	13/64"
TP14-8LF		6-8	.31	.86	.69	.26	BA14EL8		BA14EL8M		
TP14-10LF		8-10	.41	.95	.75	.31	BA14EL10		BA14EL10M		
TP10-6LF	12-10 MAX. INSUL. DIA. ACCOM.: .260 COLOR CODE: Yellow	4-6	.28	.95	.81	.26	BA10EL6		* BA10EL6M	TFM WITH DFM1D5 DIE	19/64"
TP10-8LF		6-8	.31	.98	.81	.26	BA10EL8		* BA10EL8M		
TP10-10LF		8-10	.41	1.07	.87	.31	BA10EL10		* BA10EL10M		

* UL and CSA listed with MR8-89-1 and MR15.
* 1000/Reel.