
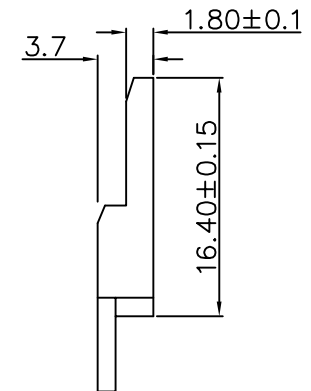
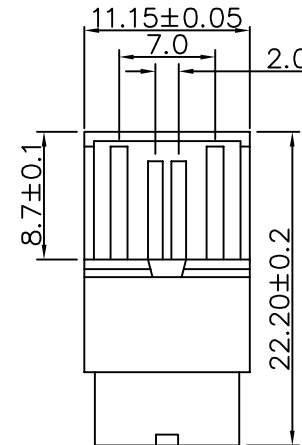
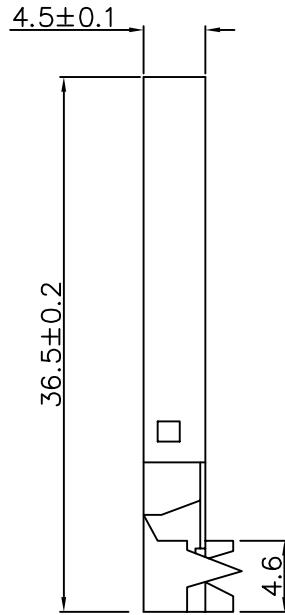


**SPECIFICATION:**

Contact Current Rating : 1 Amperes  
 Dielectric Withstanding Voltage : AC 500V R.M.S  
 Insulation Resistance: 500 Megohms Minimum At DC 500V  
 Contact Resistance : 30 Milliohms Maximum  
 Operating Temperature : -55°C To +105°C  
 Insulator :P.B.T. UL 94V-0 Rated  
 Shell : Cold Rolled Steel,Nickel Plated  
 Contact : Phosphor Bronze  
 Gold Plated Over Nickel

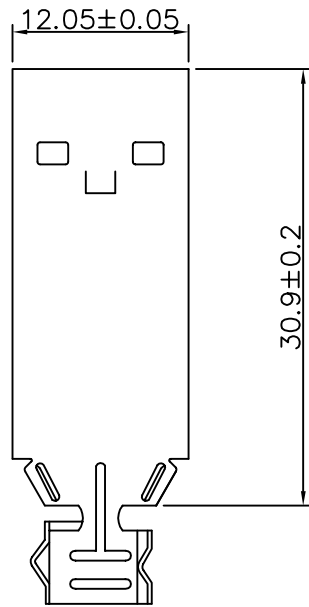

**AUK** A NUMBER OF AUK GROUP  
 太聯事業股份有限公司  
 AUK CONTRACTORS CO., LTD.

DRAWING No.  
 USB1X04PS

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE