





FSC-CMAX CONNECTORS

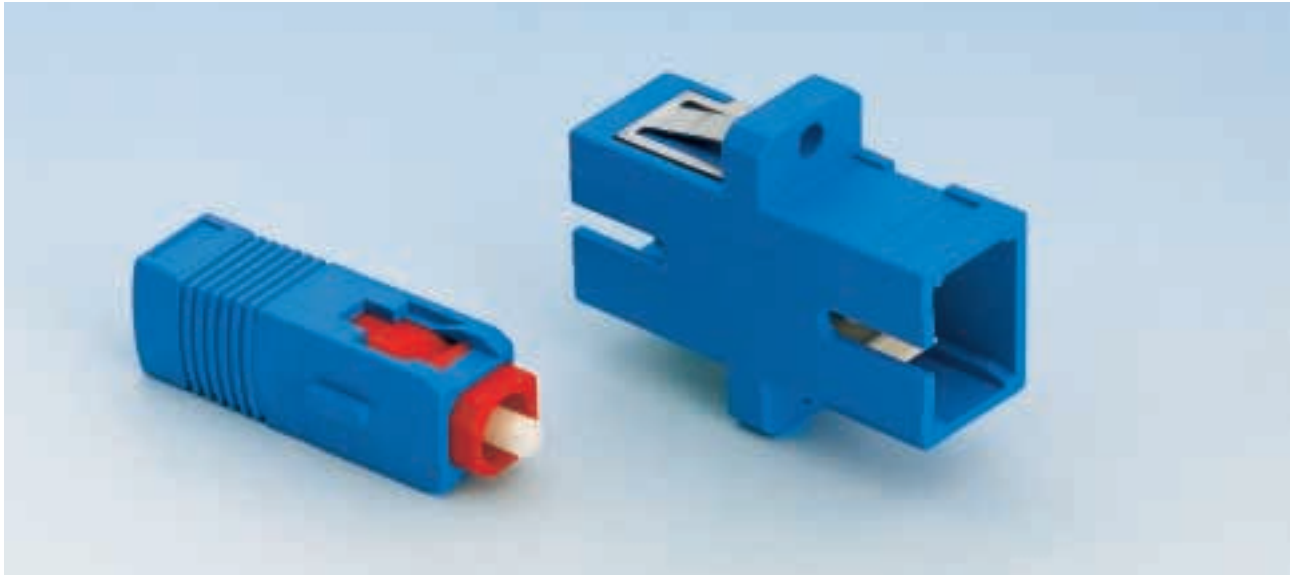

Standard colours of housing

| | |
|----------------|-------|
| Multimode | Beige |
| Singlemode | Blue |
| SM (APC 8°/9°) | Green |

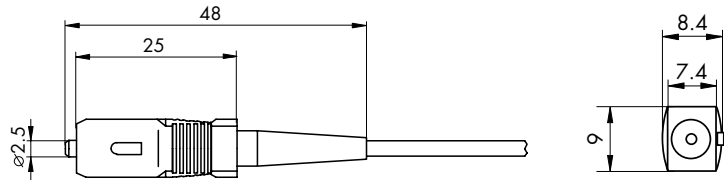

Order table: FSC-CMAX connectors

| For fibre type: | Ferrule of: | Insertion loss [dB](typ./max.): | Type: |
|----------------------|-------------|---------------------------------|-----------------------------------|
| E9/125 | Zirconia | 0.12 / <0.4 ¹⁾ | FSC-CMAX-A001 |
| E9/125 | Zirconia | 0.09 / <0.3 ¹⁾ | FSC-CMAX-H001 |
| G50/125 G62.5/125 | Zirconia | <0.4 / <0.8 | FSC-CMAX-B001²⁾ |

Order table: FSC-CMAX APC connectors (APC 8°/9°)

| For fibre type: | Ferrule of: | Return loss: | Insertion loss [dB](typ./max.): | Type: |
|-----------------|-------------|--------------|---------------------------------|----------------------|
| E9/125 APC 8° | Zirconia | > 85 dB | 0.12 / <0.4 ¹⁾ | FSC-CMAX-A600 |
| E9/125 APC 8° | Zirconia | > 85 dB | 0.09 / <0.3 ¹⁾ | FSC-CMAX-H600 |
| E9/125 APC 9° | Zirconia | > 85 dB | 0.12 / <0.4 ¹⁾ | FSC-CMAX-A603 |
| E9/125 APC 9° | Zirconia | > 85 dB | 0.09 / <0.3 ¹⁾ | FSC-CMAX-H603 |

Types printed extra bold are stock items. For description of connector, refer to page 2.01.

¹⁾ Each-to-each IEC 61300-3-34 method 2 ²⁾For FSC-CMAX EASYFIT refer to page 2.30

Crimpsets

| Cable-Ø (mm) | A Type: flame-retardant | | D Type: UL94-V0 | |
|-------------------------|-------------------------|--------------------|--------------------|--------------------|
| | Order no. BLACK | Order no. GREEN | Order no. BLACK | Order no. GREEN |
| <1.0 | 009-BK-A001 | 009-GN-A001 | | |
| 1.7 – 2.0 ¹⁾ | | | | |
| 2.0 – 2.2 | 021-BK-A001 | 021-GN-A001 | 021-BK-D001 | 021-GN-D001 |
| 2.3 – 2.6 | 024-BK-A001 | 024-GN-A001 | 024-BK-D001 | 024-GN-D001 |
| 2.7 – 2.9 | 028-BK-A001 | 028-GN-A001 | 028-BK-D001 | 028-GN-D001 |
| 3.0 – 3.3 | 030-BK-A001 | 030-GN-A001 | 030-BK-D001 | 030-GN-D001 |
| 3.4 – 3.6 | 035-BK-A001 | 035-GN-A001 | 035-BK-D001 | 035-GN-D001 |

¹⁾ **017-BK-F001**