


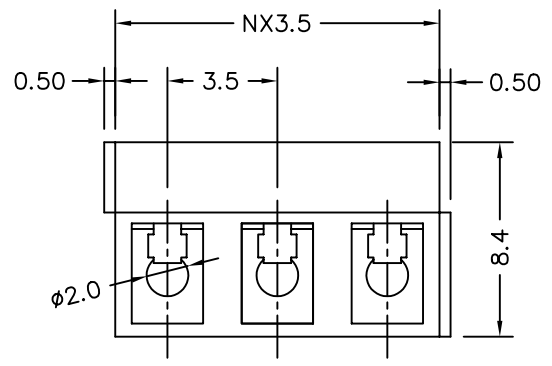


Material:
 Contact : Brass(CuZn)
 Terminal Screw : Steel Galvanized And Chromatize
 Or Nickel Plated Or Tin Plated
 Wire Guard: Stainless Steel.
 Surface Of Solder Tail : Tin Plated.
 Insulator Body : Polyimide(Glass Filled), UL94V-0.
 Electrical
 Voltage Rating: 125VAC
 Current Rating: 10Amps/Way Max.
 Contact Resistance : 20m Ohms Max.
 Insulation Resistance: 5000M Ohm /1000V
 Withstanding Voltage: AC 1500V(1min) Test Time =60Sec./1Pcs
 Wire Range : 16-26AWG
 Mechanical:
 Torque : 2kgf.cm/M2
 Operating temperature : -33°C to +120°C
 Soldering Reliability:
 Test Temperature : 250°C ±10°C, 5Sec. Max.



N=Number of contacts

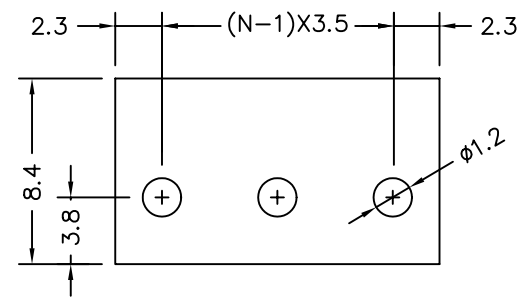

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART No. TBN35XXR		MEI							
DRAWING No. TBN35XXR		LLM							
SCALE		REV.		UNIT		AREA	REVISIONS	CHK	DATE
NONE		A		mm					