

1MBC05-060, 1MBC05D-060, 1MBG05D-060

Molded IGBT

600V / 5A


Molded Package

■ Features

- Small molded package
- Low power loss
- Soft switching with low switching surge and noise
- High reliability, high ruggedness (RBSOA, SCSOA etc.)
- Comprehensive line-up

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply

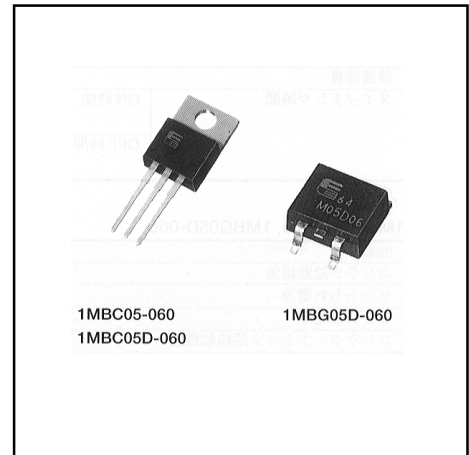


■ Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)

1MBC05-060 / IGBT


Item	Symbol	Rating	Unit
Collector-Emitter voltage	V_{CES}	600	V
Gate-Emitter voltage	V_{GES}	± 20	V
Collector current	DC	$T_c=25^\circ\text{C}$ I_{c25}	13 A
		$T_c=100^\circ\text{C}$ I_{c100}	5 A
	1ms	$T_c=25^\circ\text{C}$ I_{cp}	52 A
Max. power dissipation(IGBT)	P_c	50	W
Operating temperature	T_j	+150	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$
Screw torque	-	40	N·m

■ Equivalent Circuit Schematic



1MBC05D-060, 1MBG05D-060 / IGBT+FWD

Item	Symbol	Rating	Unit
Collector-Emitter voltage	V_{CES}	600	V
Gate-Emitter voltage	V_{GES}	± 20	V
Collector current	DC	$T_c=25^\circ\text{C}$ I_{c25}	13 A
		$T_c=100^\circ\text{C}$ I_{c100}	5 A
	1ms	$T_c=25^\circ\text{C}$ I_{cp}	52 A
Max. power dissipation (IGBT)	P_c	50	W
Max. power dissipation (FWD)	P_c	25	W
Operating temperature	T_j	+150	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$
Screw torque	-	40	N·m



● Electrical characteristics (at Tj=25°C unless otherwise specified)

1MBC05-060 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	-	-	1.0	VGE=0V, VCE=600V	mA
Gate-Emitter leakage current	IGES	-	-	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	-	8.5	VCE=20V, Ic=5mA	V
Collector-Emitter saturation voltage	VCE(sat)	-	-	3.0	VGE=15V, Ic=5A	V
Input capacitance	Cies	-	400	-	VGE=0V	pF
Output capacitance	Coes	-	85	-	VCE=10V	
Reverse transfer capacitance	Cres	-	15	-	f=1MHz	
Turn-on time	ton	-	-	1.2	VCC=300V Ic=5A	µs
	tr	-	-	0.6	VGE=±15V	
Turn-off time	toff	-	-	1.0	RG=330 ohm	µs
	tf	-	-	0.35	(Half Bridge)	

1MBC05D-060, 1MBG05D-060 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	-	-	1.0	VGE=0V, VCE=600V	mA
Gate-Emitter leakage current	IGES	-	-	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	-	8.5	VCE=20V, Ic=5mA	V
Collector-Emitter saturation voltage	VCE(sat)	-	-	3.0	VGE=15V, Ic=5A	V
Input capacitance	Cies	-	400	-	VGE=0V	pF
Output capacitance	Coes	-	85	-	VCE=10V	
Reverse transfer capacitance	Cres	-	15	-	f=1MHz	
Turn-on time	ton	-	-	1.2	VCC=300V, Ic=5A	µs
	tr	-	-	0.6	VGE=±15V	
Turn-off time	toff	-	-	1.0	RG=330 ohm	µs
	tf	-	-	0.35	(Half Bridge)	
FWD forward on voltage	VF	-	-	3.0	IF=5A, VGE=0V	V
Reverse recovery time	trr	-	-	0.3	IF=5A, VGE=-10V, di/dt=100A/µs	µs

● Thermal resistance characteristics

1MBC05-060 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	-	-	2.50	IGBT	°C/W


1MBC05D-060, 1MBG05D-060 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	-	-	2.50	IGBT	°C/W
	Rth(j-c)	-	-	5.00	FWD	°C/W

■ Outline drawings, mm


1MBC05-060, 1MBC05D-060

TO-220AB

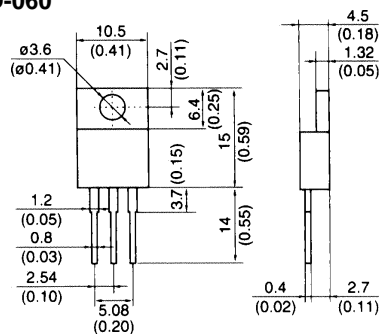

1MBG05D-060

T pack-S (SMD type)

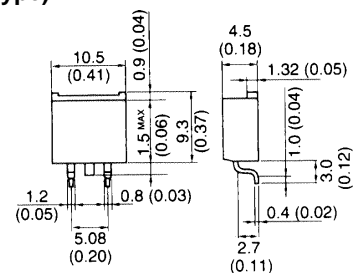


Characteristics

1MBC05-060, 1MBC05D-060, 1MBG05D-060


Collector current vs. Collector-Emmitter voltage

T_j=25°C

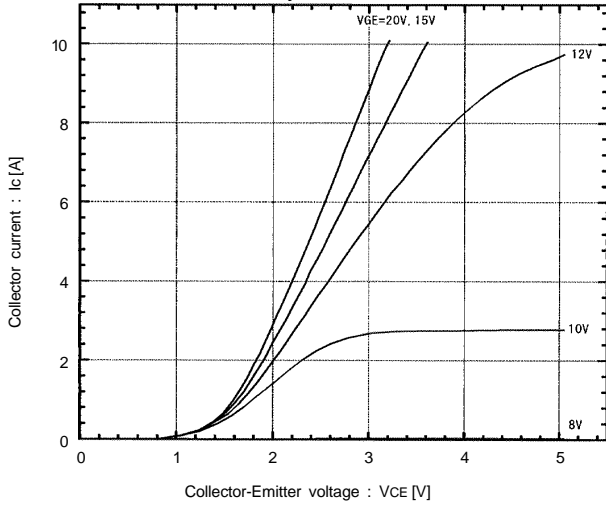


Collector current vs. Collector-Emmitter voltage

T_j=125°C

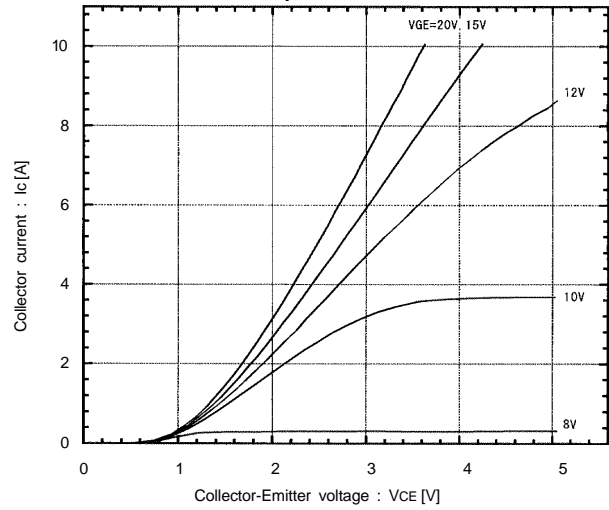


Collector-Emmitter vs. Gate-Emmitter voltage

T_j=25°C

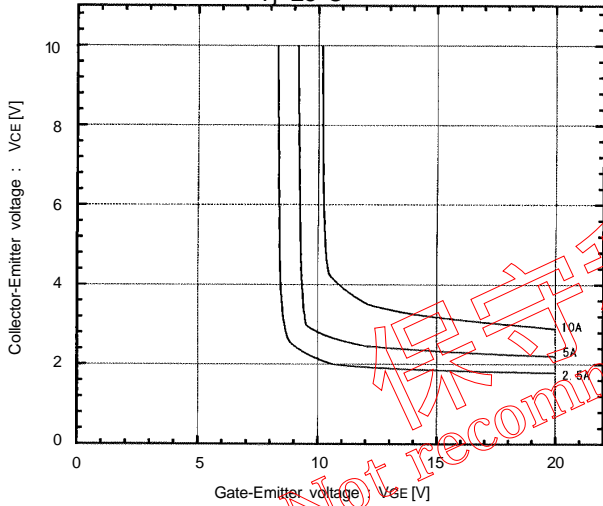


Collector-Emmitter vs. Gate-Emmitter voltage

T_j=125°C

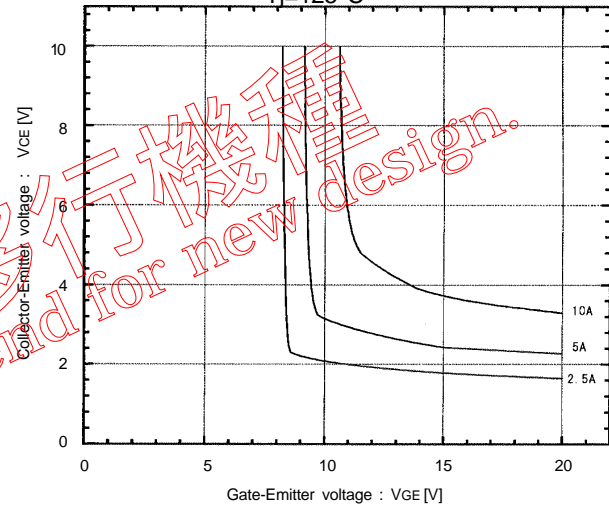


Switching time vs. Collector current

V_{CC}=300V, R_G=330 ohm, V_{GE}=±15V, T_j=25°C

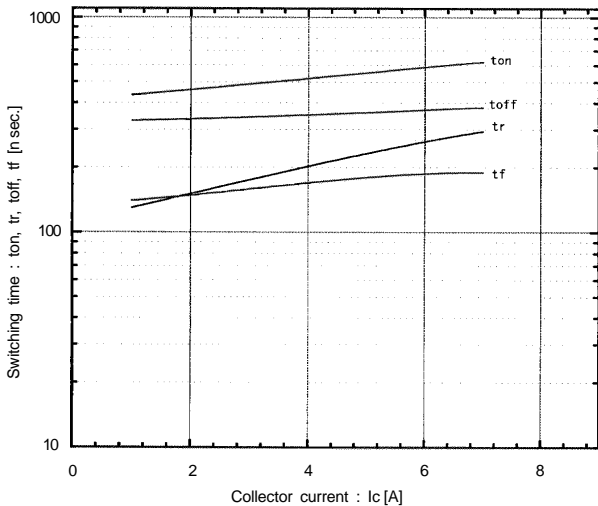

Switching time vs. Collector current







V_{CC}=300V, R_G=330 ohm, V_{GE}=±15V, T_j=125°C

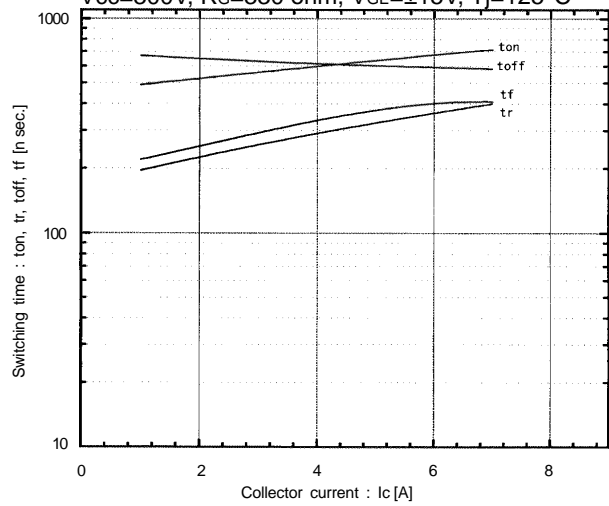

Not recommend for new design.

Characteristics


1MBC05-060, 1MBC05D-060, 1MBG05D-060

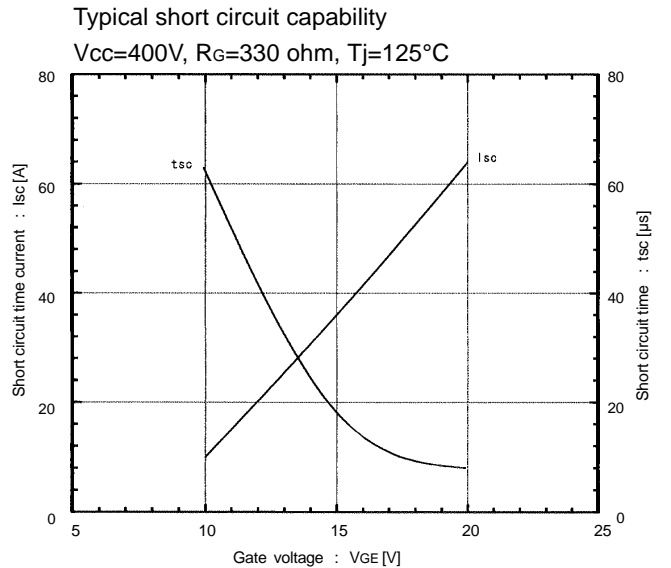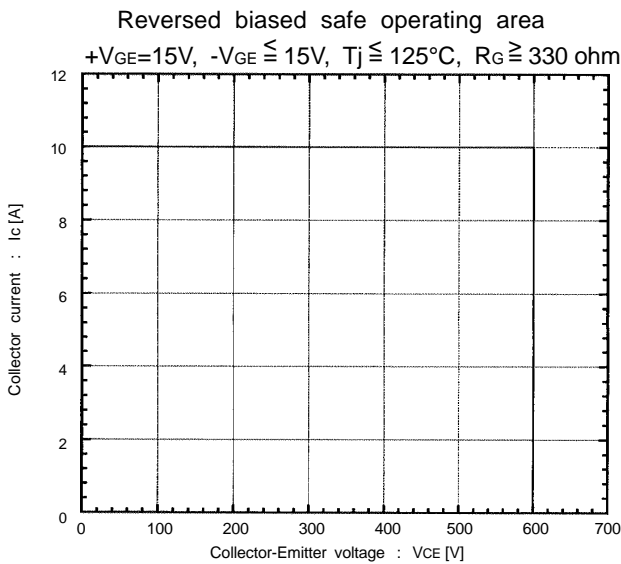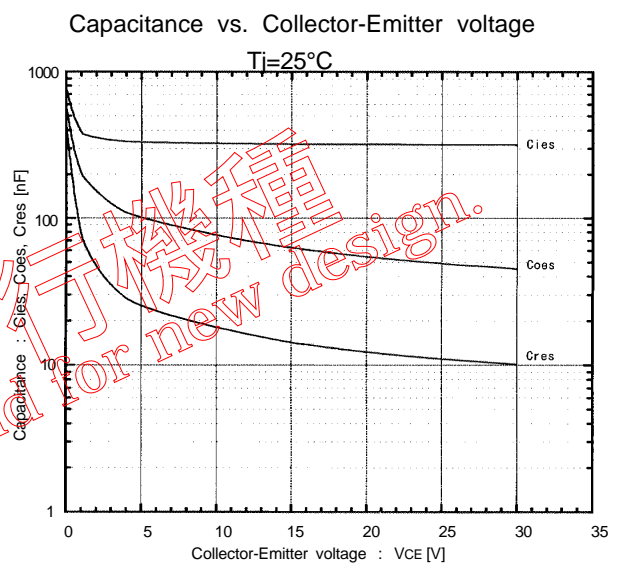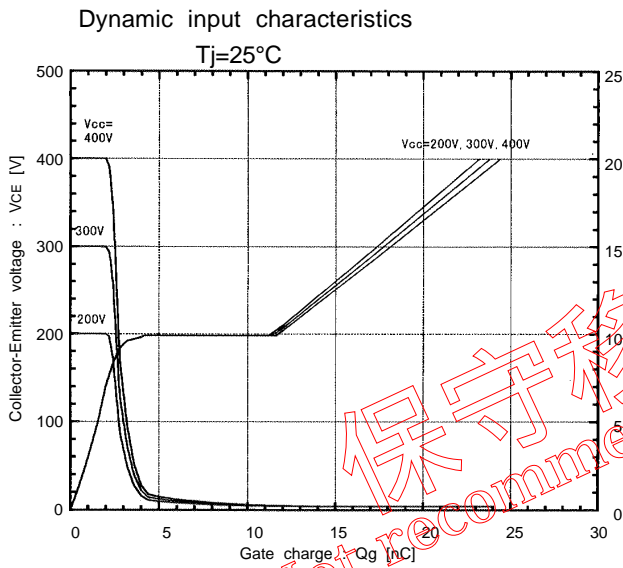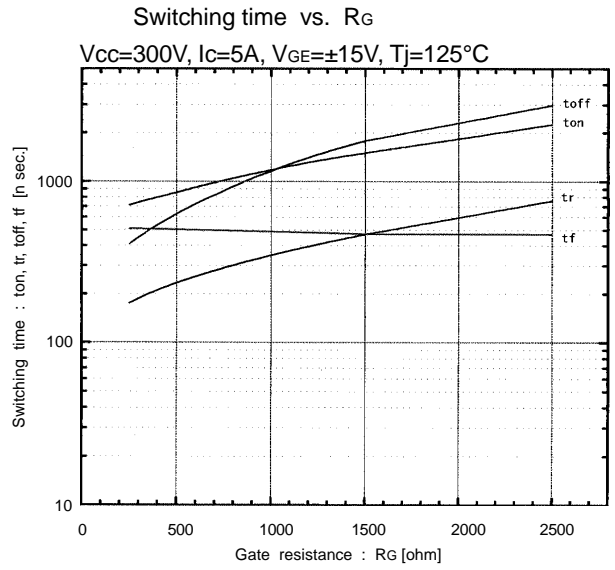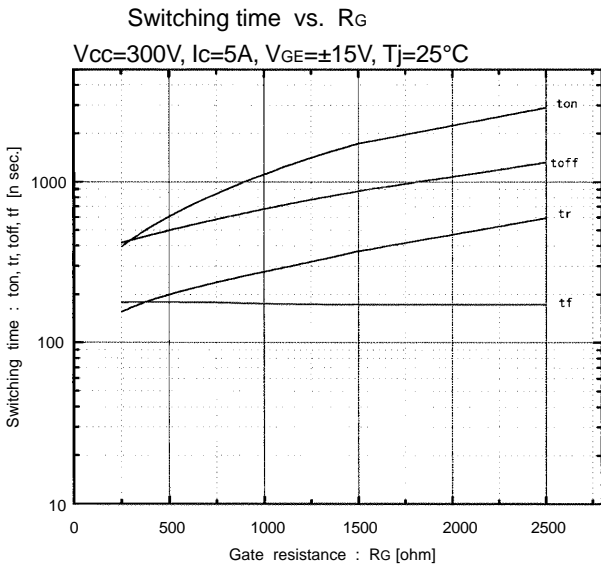

■ Characteristics


1MBC05-060, 1MBC05D-060, 1MBG05D-060

Transient thermal resistance

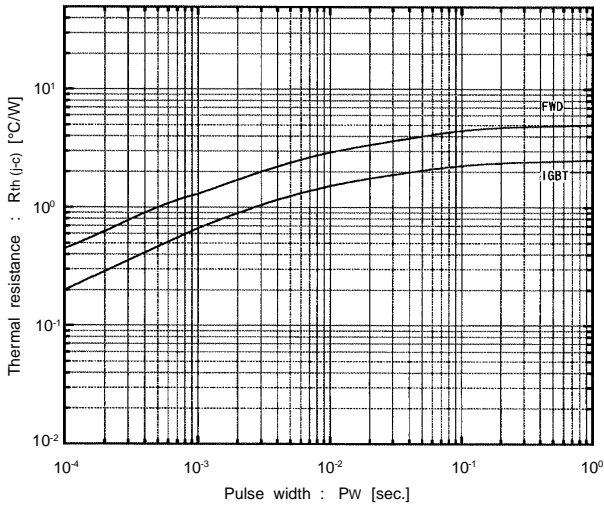


1MBC05D-060, 1MBG05D-060


Reverse recovery time vs. Forward current

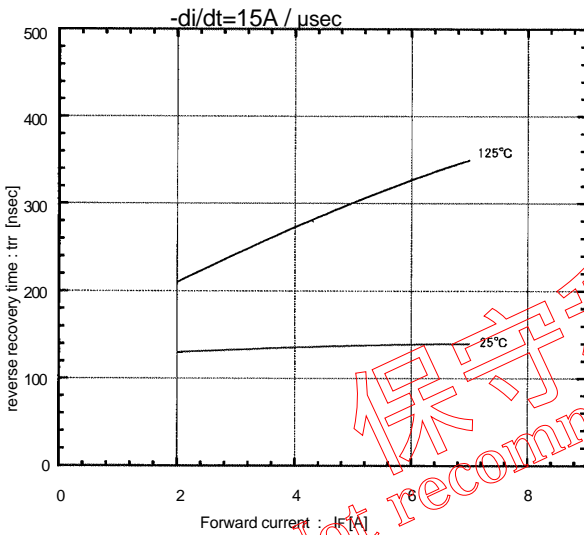

Reverse recovery current vs. Forward current

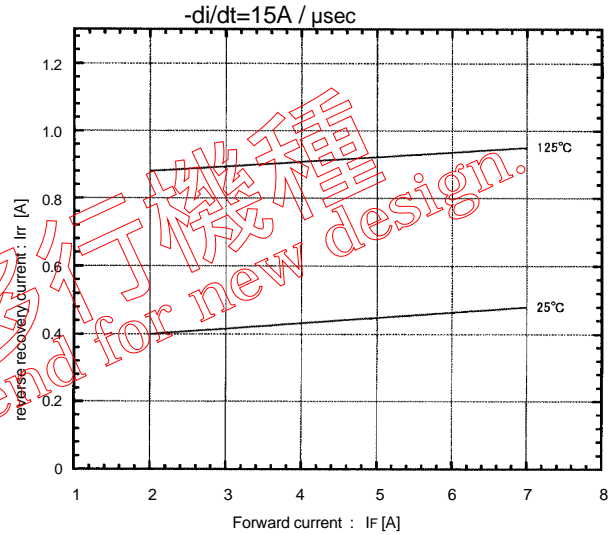

Forward current vs. Forward voltage

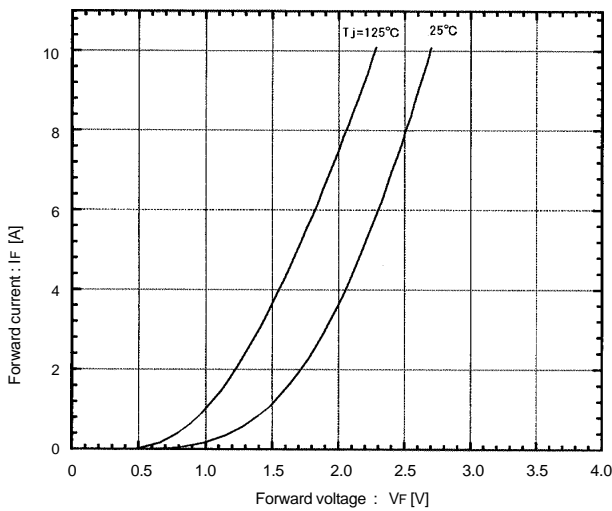

Reverse recovery time characteristics vs. -di/dt

