


SD

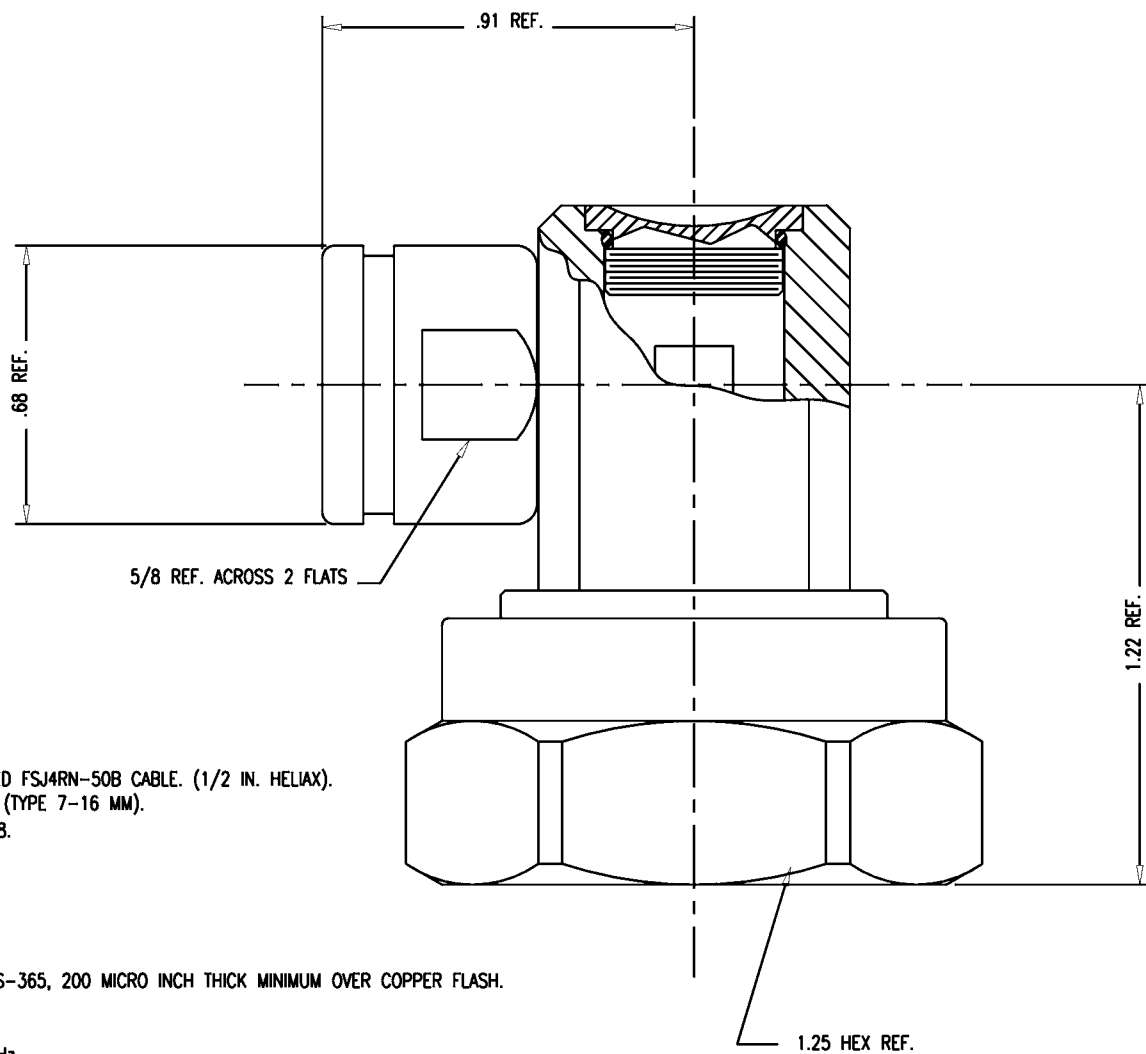

NOTES:

1. FOR USE WITH ANDREWS FSJ4-50B AND FSJ4RN-50B CABLE. (1/2 IN. HELIAX).
2. INTERFACE PER, IEC STANDARD 169-4 (TYPE 7-16 MM).
3. FOR CABLING INSTRUCTIONS SEE 3-718.
4. MATERIALS:
O RINGS: SILICONE RUBBER.
INSULATOR: TEFLON.
ALL OTHER METAL PARTS: BRASS.
5. FINISHES:
METAL PARTS: SILVER PLATE PER QQ-S-365, 200 MICRO INCH THICK MINIMUM OVER COPPER FLASH.
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS.
FREQUENCY RANGE: DC TO 6.0 GHz.
OPERATING VOLTAGE: 2700 VRMS.

3156-5-5

REVISIONS

ISSUE	CHANGES
0	ER 38598 HVN 06/11/02
1	CN 38634 E TML 08/30/02

3156-5-5S

SCALE 3:1	
APPROX SURFACE AREA	
WAS E-20026	
USED ON	
REF:	
7-16, PL ANG.	
DRAWN HVN	DATE 04/11/02
DESIGN HVN	DATE 04/11/02
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

3156-5-5

SD