


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

P/N FSCM1**

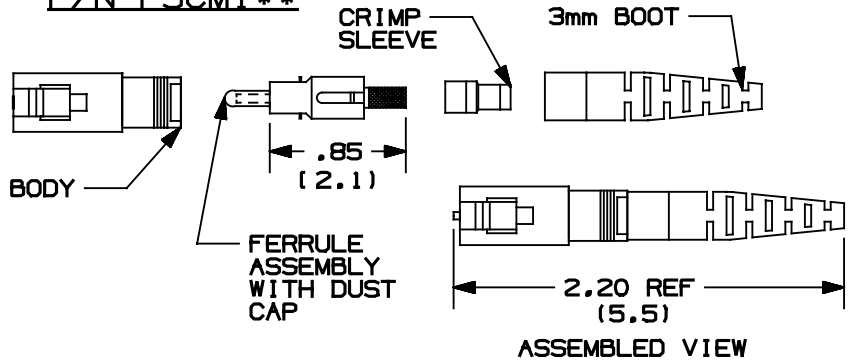


PANDUIT P/N	WEIGHT	FERRULE TYPE
FSCM1**	1.00 LB/100 PCS (454.54g/100 PCS)	ZIRCONIA (CERAMIC)
FSCM1B**	1.00 LB/100 PCS (454.54g/100 PCS)	ZIRCONIA (CERAMIC)

NOTES:

- SEE CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- ACCEPTS 62.5/125 MICRON MULTIMODE GLASS OPTICAL FIBER CABLE.
- THE MAX. INSERTION LOSS PER CONNECTOR IS 0.75 dB. OPERATING TEMP. RANGE IS FROM -40° TO 70°C.
- FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA-568-A.
- DIMENSIONS IN PARENTHESES ARE IN CENTIMETERS
- MATERIAL:
 BODY: GLASS REINFORCED PBT
 BOOT: THERMOPLASTIC ELASTOMER
 FERRULE: ZIRCONIA CERAMIC
- FERRULE DIAMETER: 2.498/2.500mm.

P/N FSCM1B**

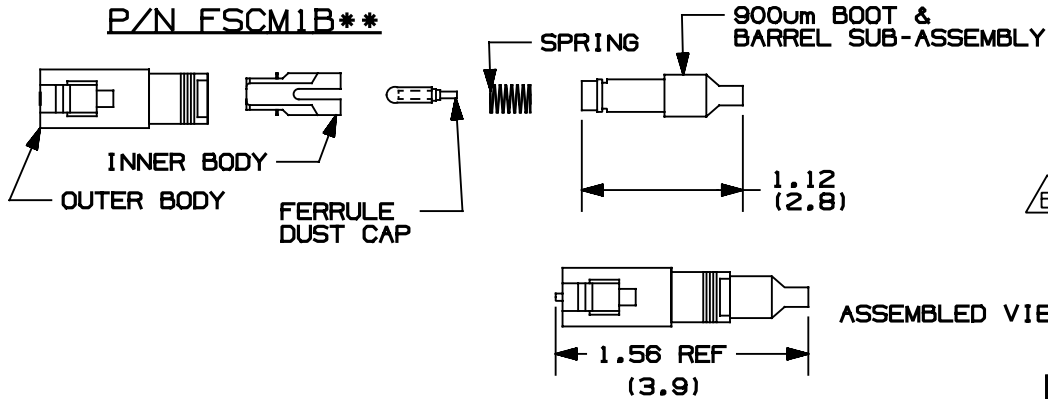

CAD FILENAME/LAYERS M00071BD_DC_00C.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS
SC SIMPLEX MULTIMODE CONNECTORS (FSCM1, FSCM1B**)**
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ±.03 (.8) ANGLES ±
 (.XXX) ±.010 (.3)

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	CHK	CUST	SUP
2	2-1-99	JSP		C. WAS JUST CERAMIC. B. ADDED NOTE #7, FERRULE DIAMTER.	00071-06			
1	2-19-98	JBA	FJD	.A REV'D P/N: WAS RFSCM1** & RFSCM1B**.	00071-06	FJD		
R	1-28-98	JSP	FJD	RELEASED TO PRODUCTION.	00071-06	FJD		

DRAWN BY
JSP
 DATE
1-28-98
 CHECKED BY
FJD

MAT'L:
 SEE NOTES

SCALE
NONE

DRAWING NO.
00071-06
 DWG
A
 SIZE