

Modified TO-220

SIDAC  [®]

Solid State Overvoltage Protection

P326
Applications
Preliminary
Data

Features

- Designed for CATV transient surges
- Bidirectional transient voltage protection
- Clamping speed of nanoseconds
- Surge current capability 1KA, 8x20 μ s waveform
- Available on tape and reel
- Peerless, economical, rugged package
- Glass passivated junctions for reliability




Electrical Specifications

Parameters		Test Conditions	P326		Units
			Min	Max	
V_{BO}	Breakover Voltage	1kV/s	120	160	V
I_{DRM}	Off-State Leakage Current	Measured at 80% V_{BO} (MIN)		5	μ A
I_H	Holding Current		30		mA
V_T	On-State Voltage	Measured at I_T		5	V
I_{PP}	Peak Pulse Current	8x20 μ s	1000		A
		10x1000 μ s	250		A
I_{TSM}	Peak Surge Current	1 Cycle, 60 Hz	60		A
		1 Cycle, 50 Hz	50		A
I_T	Continuous On-State Current	DC or RMS	1		A
C_O	Off-State Capacitance	1 MHz, 50VDC BIAS		100 TYP	pF

Note: All parts are 100% surged at 100A, 10x1000 μ s I_{PP} and monitored at 1000A, 8x20 μ s I_{PP}

V-I Characteristics of devices with negative resistance.

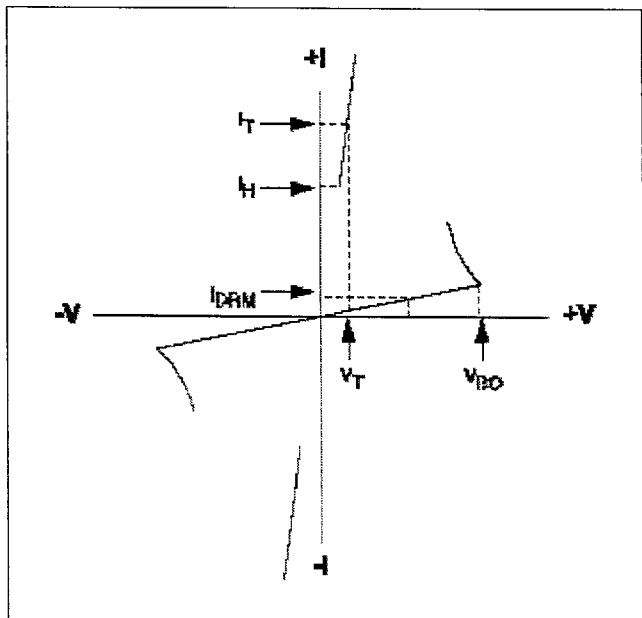

TECCOR ELECTRONICS, INC.
1801 Hurd Drive
Irving, Texas 75038-4385
United States of America

Phone: (972) 580-7777
Fax: (972) 550-1309
E-mail: teisales@airmail.net
Website: <http://www.teccor.com>

DE

Please call the factory for further information.

Data Sheet: **P326**
February, 1997