



1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE






RECOMMENDED CABLE STRIPPING DIM'S



RECOMMENDED MOUNTING HOLE

CABLES: - CABLE MINI
- COAXIAL
PANEL THICKNESS:
1. 1.2mm(GROUNDED OR ISOLATED)
2. 3mm(ONLY GROUNDED, WITHOUT WASHERS
⑦ AND ⑧)

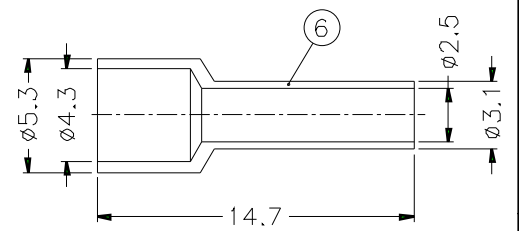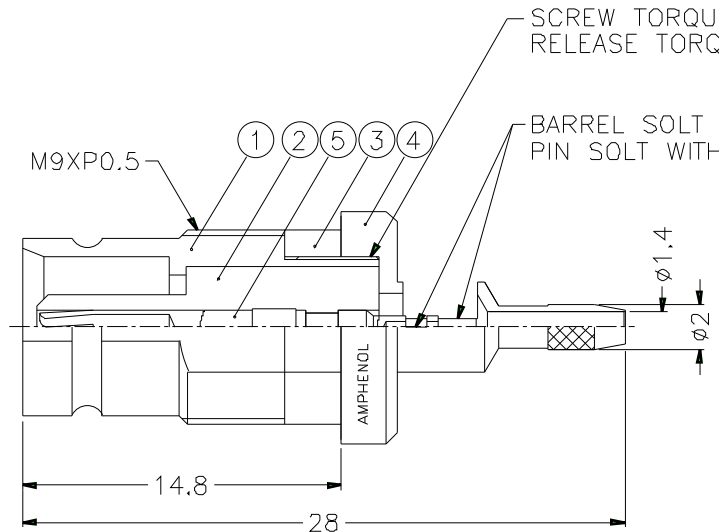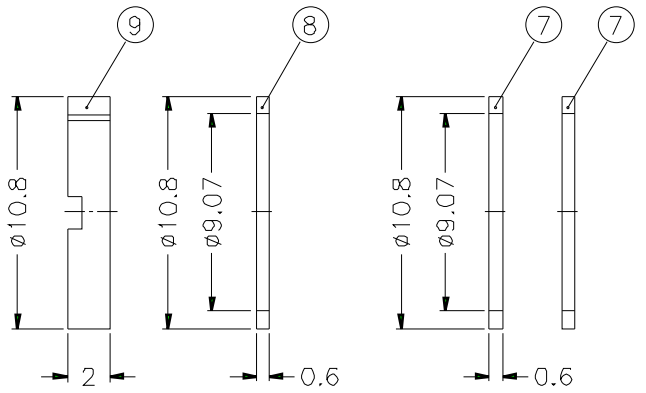

- FERRULE CRIMPING TOOLS P/N SX 660 0057 HEX: 2.67
- INNER CONTACT TO SOLDER
- AFTER CRIMPING CABLE WITHDRAWAL FORCE: 70 N MIN.
- CONNECTOR ACCORDING TO NFC 93-570
- PACKAGING IN TRAY (QTY: 100) WITH COMMERCIAL PART NUMBER AND DATE CODE

9	NUT	BRASS	NICKEL	1	
8	WASHER	BRASS	NICKEL	1	
7	ISOLATING WASHER	EPOXY GLASS -FR4 TYPE	NATURAL	2	
6	FERRULE	BRASS	NICKEL	1	
5	CONTACT PIN	BECU	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	RING	PSU,20% G.F.	GREEN	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	GOLD	1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS

PART NO.	156 931 18P
APPROVED	DATE 10-11-01'
CHECKED	DATE 10-11-01'
DRAWN	DATE 10-11-01'
FILE NO.	

Amphenol	
TITLE	1.6/5.6 75Ω BULKHEAD MOUNT JACK
DRAWING NO.	
ITEM NO.	

1 2 3 4 5 6 7 8

F

E

D

C

B

A

F

E

D

C

B

A