




**SIZE 2**

PICO PART #	TURNS RATIO TOLER. ±5%	Lm TYPICAL μH	LEAKAGE IND. VALUE IN μH TYPICAL		WINDING RESISTANCE MAX VALUE IN OHMS			TYPICAL INTER-WINDING CAP VALUE IN pF		E.T. RATING VOLT - μSEC MIN. PRIMARY	PRICE (1-9)
			LL (N1-N2)	LL (N1-N3)	R(N1)	R(N2)	R(N3)	C1 (N1-N2)	C2 (N1-N3)		
74210	1:1:1	250	.350	.712	.038	.046	.048	35	18	16	38.78
74215	1:1:1	1000	.650	1.2	.12	.15	.17	35	18	32	38.78
74220	1:1:1	2250	1.5	3.0	.28	.32	.37	35	18	48	38.78
74225	1:1:1	4000	2.5	5.0	.59	.66	.74	35	18	65	38.78
74230	1:1:1	6200	4.0	8.0	1.27	1.48	1.56	35	18	80	38.78
74235	2:1:1	250	.400	.815	.038	.014	.015	35	18	16	38.78
74240	2:1:1	1000	.800	1.6	.12	.044	.049	35	18	32	38.78
74245	2:1:1	2250	1.8	3.6	.28	.11	.13	35	18	48	38.78
74250	2:1:1	4000	3.2	6.4	.59	.17	.20	35	18	65	38.78
74255	2:1:1	6200	5.0	10.0	1.26	.29	.31	35	18	80	38.78
74260	3:1:1	350	.400	.900	.036	.017	.023	35	18	19	38.78
74265	3:1:1	1400	1.1	2.2	.15	.035	.039	35	18	38	38.78
74270	3:1:1	3000	2.4	5.0	.42	.062	.068	35	18	57	38.78
74275	3:1:1	5500	4.2	8.0	.75	.23	.24	35	18	76	38.78
74280	3:1:1	9000	6.5	10.0	1.02	.39	.41	35	18	95	38.78
74285	3:3:1	350	.450	1.0	.063	.068	.049	35	18	19	38.78
74290	3:3:1	1400	1.2	2.6	.15	.17	.065	35	18	38	38.78
74295	3:3:1	3000	2.5	5.0	.42	.48	.089	35	18	57	38.78
74300	3:3:1	5500	4.5	9.0	.94	1.14	.43	35	18	76	38.78
74305	3:3:1	9000	7.0	14.0	1.54	1.74	.64	35	18	95	38.78
74310	4:2:1	350	.700	1.64	.040	.023	.014	35	18	19	38.78
74315	4:2:1	1400	1.3	2.7	.12	.067	.035	35	18	38	38.78
74320	4:2:1	3000	2.7	5.5	.42	.12	.070	35	18	57	38.78
74325	4:2:1	5500	4.8	9.0	.94	.27	.15	35	18	76	38.78
74330	4:2:1	9000	7.5	15.0	1.53	.35	.19	35	18	95	38.78

**SIZE 3**

PICO PART #	TURNS RATIO TOLER. ±5%	Lm TYPICAL μH	LEAKAGE IND. VALUE IN μH TYPICAL		WINDING RESISTANCE MAX VALUE IN OHMS			TYPICAL INTER-WINDING CAP VALUE IN pF		E.T. RATING VOLT - μSEC MIN. PRIMARY	PRICE (1-9)
			LL (N1-N2)	LL (N1-N3)	R(N1)	R(N2)	R(N3)	C1 (N1-N2)	C2 (N1-N3)		
74515	1:1:1	300	.300	.400	.044	.048	.054	45	25	25	38.78
74520	1:1:1	1200	1.25	1.9	.095	.11	.13	45	25	50	38.78
74525	1:1:1	2700	1.75	4.2	.22	.26	.29	45	25	75	38.78
74530	1:1:1	4800	3.0	7.3	.46	.52	.59	45	25	100	38.78
74535	1:1:1	7500	4.6	11.4	.81	.90	.99	45	25	125	38.78
74540	2:1:1	300	.514	.630	.044	.013	.017	45	25	25	38.78
74545	2:1:1	1200	.900	1.7	.095	.043	.047	45	25	50	38.78
74550	2:1:1	2700	2.0	3.7	.22	.10	.12	45	25	75	38.78
74555	2:1:1	4800	3.0	6.5	.46	.17	.19	45	25	100	38.78
74560	2:1:1	7500	4.88	10.0	.80	.28	.34	45	25	125	38.78
74565	3:1:1	400	.686	.800	.049	.011	.011	45	25	30	38.78
74570	3:1:1	1600	1.25	3.0	.12	.035	.038	45	25	60	38.78
74575	3:1:1	3600	2.75	6.5	.33	.062	.068	45	25	90	38.78
74580	3:1:1	6400	4.6	1.20	.58	.14	.15	45	25	120	38.78
74585	3:1:1	10,000	7.2	18.0	1.25	.13	.15	45	25	150	38.78
74590	3:3:1	400	.400	1.02	.062	.072	.012	45	25	30	38.78
74595	3:3:1	1600	1.25	1.5	.12	.14	.040	45	25	60	38.78
74600	3:3:1	3600	3.0	2.9	.33	.38	.070	45	25	90	38.78
74605	3:3:1	6400	5.3	5.0	.58	.73	.18	45	25	120	38.78
74610	3:3:1	10,000	8.2	7.8	1.35	1.40	.20	45	25	150	38.78
74615	4:2:1	400	.580	1.12	.054	.016	.009	45	25	30	38.78
74620	4:2:1	1600	1.2	3.0	.12	.052	.028	45	25	60	38.78
74625	4:2:1	3600	2.75	7.0	.33	.15	.084	45	25	90	38.78
74630	4:2:1	6400	4.6	12.0	.58	.14	.080	45	25	120	38.78
74635	4:2:1	10,000	7.1	19.6	1.22	.27	.15	45	25	150	38.78

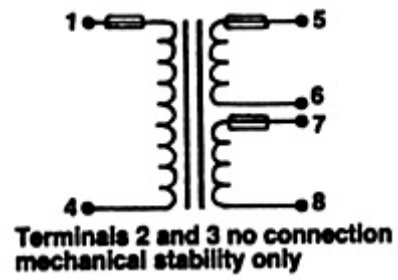

---

For immediate engineering assistance or to place an order: **Call Toll Free: 800-431-1064**

**PICO Electronics, Inc.**

143 Sparks Ave. Pelham, NY 10803-1810  
Tel: 914-738-1400 or Fax: 914-738-8225

[Go back to Thru Hole Transformers and Inductors menu](#) <sup>[4]</sup>

---