


NOTES: UNLESS OTHERWISE SPECIFIED

- FOR GENERAL SERIES SPECIFICATIONS, SEE SD36-0000.
- MATERIAL SPECIFICATIONS:
 FRONT CONTACT: COPPER ALLOY
 LOCKWASHER: BRONZE PER ASTM B103
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 O-RING: SILICONE RUBBER PER ZZ-R-765
- FINISH SPECIFICATIONS:
 CENTER CONTACTS: .000030 MIN GOLD PER ASTM B488
 OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
 BODY: .000015 MIN GOLD PER ASTM B488 OVER
 .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
 NUT AND LOCKWASHER: .000005 MIN GOLD PER ASTM B488 OVER
 .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
- FOR USE WITH Ø.085 SEMI-RIGID CABLE OR EQUIVALENT
- FOR CABLING PROCEDURES, USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN
- BULLET CONTACT, O-RING, LOCKWASHER AND NUT SHIPPED LOOSE.

REV	DESCRIPTION	BY DATE	APPD
01	ER3063	PSM 05/08/07	DCam

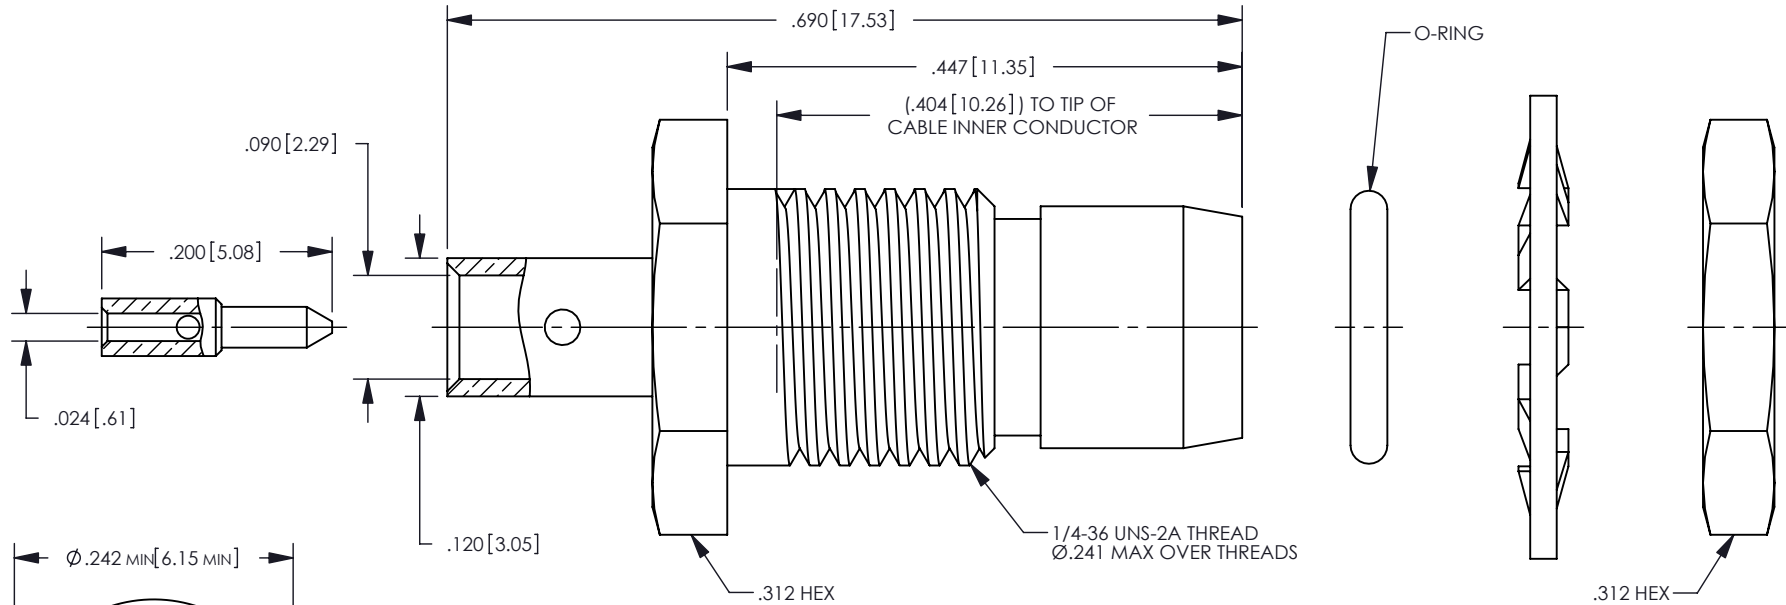

CATALOG P/N: 360-574-0852H

PER ASME Y14.5M-1994
 UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES:
 DECIMAL: .XX [X.X] ± .01 [0.3]
 .XXX [X.XX] ± .005 [0.13]
 .XXXX [X.XXX] ± .XXXX
 ANGLES: ± 2° SCALE: 6:1

Winchester Electronics
 Winchester Electronics Corporation
 62 Barnes Industrial Road North
 Wallingford, Connecticut 06492

DRAWN		DATE		APPROVED		DATE	
PSM		05/08/07		XXX		XX/XX/XX	
APPROVED		DATE		APPROVED		DATE	
XXX		XX/XX/XX		XXX		XX/XX/XX	

CUSTOMER DRAWING

**BMA BULKHEAD CABLE PLUG
 SOLDER ATTACHMENT**

A SD360-574-0852H SHT 1 OF 1 REV 01

RECOMMENDED MOUNTING HOLE

CABLE TRIMMING DIMENSIONS