



Series 600 DIP Headers with Coined Contacts

FEATURES:

- Aries offers a full line of DIP headers, available with either coined or screw machine contacts. Consult Data Sheet No. 12035 for screw machine contacts.
- Snap-on, protective covers are available for all sizes shown below and accommodate .125 [3.18] to .750 [9.05] component heights. Consult Data Sheet No. 12033 for protective covers.
- Body cavity design provides additional clearance for component mounting.


SPECIFICATIONS:

- Body material is red UL 94-HB Glass-filled Nylon. Consult factory for UL 94V-0 rated material.
 - Coined contacts are Brass, 1/2 hard.
 - Contact plating is either 100μ [2.54μm] min. Tin per MIL-T-10727 or 10μ [.25μm] min. Gold per MIL-G-45204 over 50μ [1.27μm] min. Nickel per QQ-N-290.
 - Contact current rating=2 Amps.
 - Operating temperature=221°F [105°C] Tin plating, 257°F [125°C] Gold plating.
 - Fork contact accepts up to .025 [.64] diameter leads.
- MOUNTING CONSIDERATIONS:**
- Suggested PCB hole size=.035 ± .002 [.89 ± .05] dia.

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13] unless otherwise specified

"A"=(NO. OF PINS PER ROW X .100 [2.54]) + .095 [2.41]
"B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

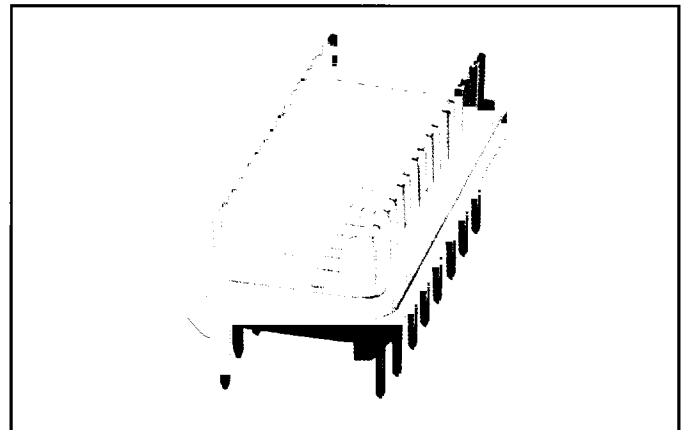

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.



ORDERING INFORMATION

XX-600-XX

No. of pins: _____
.300 [7.62] centers: 2 thru 20
.400 [10.16] centers: 22
.600 [15.24] centers: 24, 28, 40 Series

Plating:
0= Tin
1= Gold



Pin style:
1= Fork pin
2= Post pin

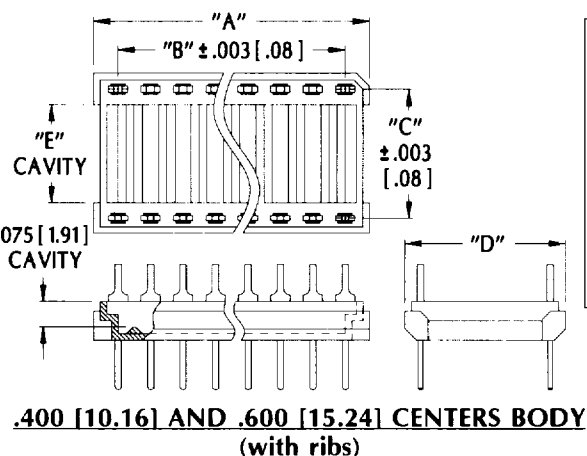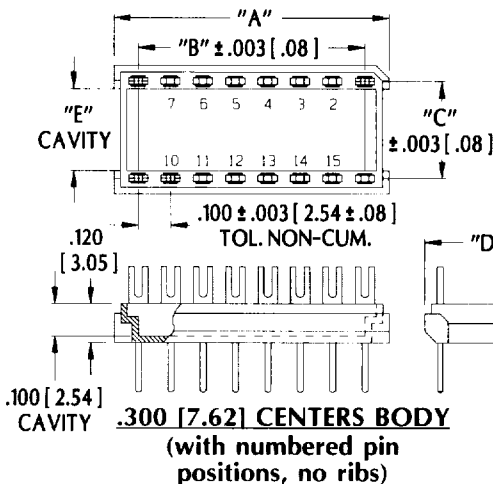

Consult Data Sheet No. 12033 for snap-on protective covers.

Consult Data Sheet No. 12035 for screw machine contacts.

Centers "C"	Dim. "D"	Dim. "E"
.300 [7.62]	.395 [10.03]	.252 [6.40]
.400 [10.16]	.495 [12.57]	.352 [8.94]
.600 [15.24]	.695 [17.65]	.552 [14.02]

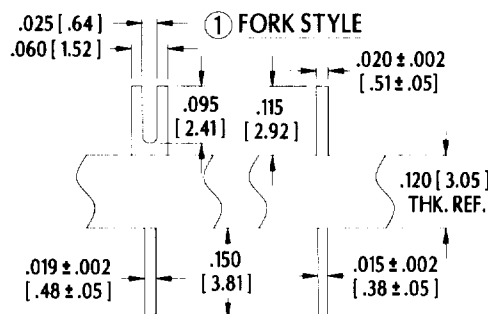

ARIES
ELECTRONICS, INC.
http://www.arieselec.com • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891

UK/SCANDINAVIA/IRELAND
Milton Keynes, GB
TEL: +44 1908 260007
FAX: +44 1908 260008

EUROPE (MAINLAND)
Papendrecht, Holland
TEL: +31 78 615 94 65
FAX: +31 78 615 43 11

12032
REV.A