


SPECIFICATION CONTROL DRAWING

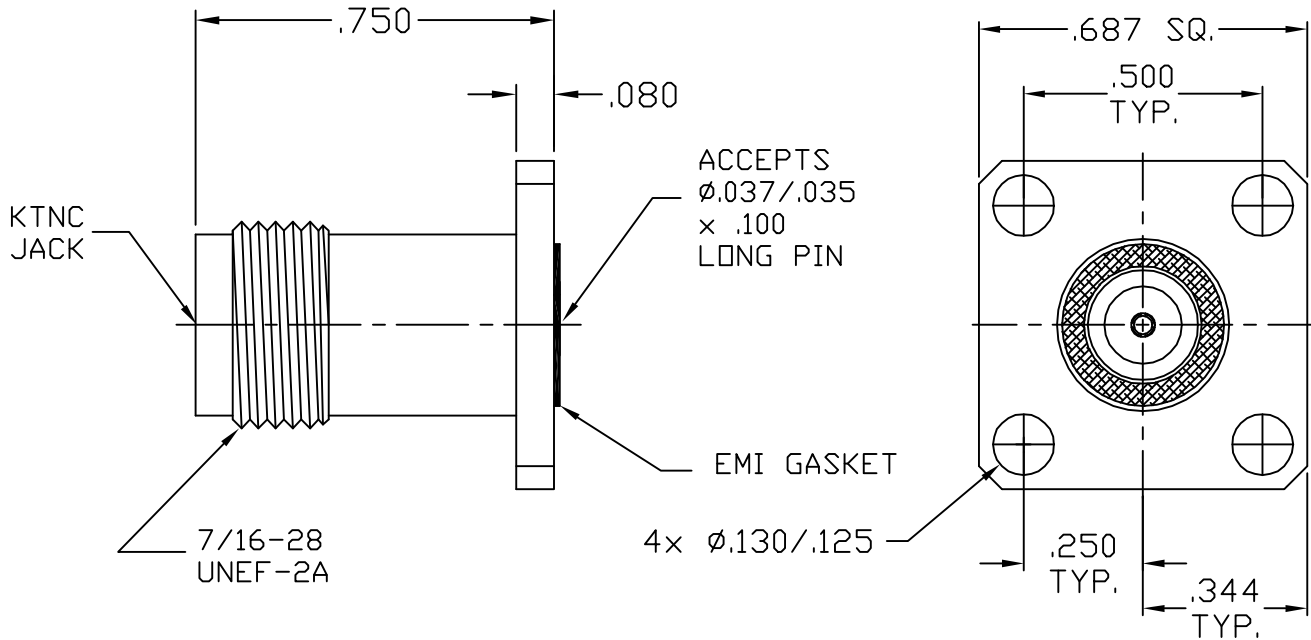


1. MATING INTERFACE DIMENSION PER MIL-STD-348A FIG. 313.2 (TNC, JACK) AND DYNAWAVE MD-85 (KTNC 18 GHz)

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 18.0 GHz.
VSWR (MAX.) *	_____	1.05 + .007 x FGHz
INSERTION LOSS (dB MAX.)	_____	.04 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	500
RF LEAKAGE (MIN. dB DOWN)	_____	100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	10,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	8.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 Haverhill, MA 01835
AA	05-1328	3/14/05	DC	DECIMALS	FRACTIONAL	ANGULAR	
BA	05-1776	8/4/05	DC	.X ± .030 .XX ± .010 .XXX ± .005	±1/64	X° ± 1'0" X° X' ± 15'	
				DRAWN DC	DATE 3/14/05	TITLE KTNC, JACK FIELDREPLACABLE, 4 HOLE FLANGE	
				APPROVED DC	DATE 3/14/05		
				CODE IDENT.	SHEET 1 OF 2	DWG. NO. 8554-0781-6235	
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 6.0 LBS.
- MIN. RADIAL TORQUE _____ 2.0 IN. OZ.

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) _____ INTERFACE 32.0 ; REAR 32.0
- WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0 ; REAR 1.0

CONNECTOR ENGAGEMENT & DISENGAGEMENT (MAX. IN. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ 10 TO 15 INCH LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65 °c TO + 200 °c)
SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)
VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b
CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

BODY _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A
CONTACT _____ BERYLLIUM COPPER PER ASTM B196, COPPER ALLOY
UNS C17300, TEMPER TD04.
DIELECTRIC _____ TEFLON PER D-1457
EMI GASKET _____ SILVER PLATED ALUMINUM IN SILICONE

6. FINISH

BODY _____ PASSIVATE PER QQ-P-35A, TYPE I.
CONTACT _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 2.5,
(.000100 MIN. THK.) OVER QQ-N-290, CLASS 1
(.000050 MIN. THK.) OVER COPPER PER MIL-C-14550
DIELECTRIC _____ N/A
EMI GASKET _____ BLUE