

Avantek Products

Ultra Low Noise Narrowband Amplifier 1.2 to 1.4 GHz

Technical Data

1
ACT-141223

Features

- **Ultra Low Noise Figure:**
1.1 dB (Typ)
- **Narrow Frequency Range:**
1.2 to 1.4 GHz
- **Internal Voltage Regulator**
- **Available With High Reliability Screening**
- **Removable Connectors**


Applications

- **L Band Radar**
- **RF/IF Front Ends**
- **Low Signal Level Amplification**

Description

The ACT-120923 is a GaAs FET input, ultra low noise, narrowband amplifier using a single-ended, multi-stage design with lossless feedback and an internal voltage regulator. A custom thin-film matching network provides optimum performance over the 950 to 1250 MHz frequency range. It is packaged in a laser-welded, hermetically-sealed case with field-replaceable SMA connectors. Without connectors it is suitable for microstrip mounting.

Pin Configuration

AX-2


(See Section 5 for detailed case drawings.)

Maximum Ratings

Parameter	Maximum
DC Voltage	+17 Volts
Continuous RF Input Power	+15 dBm
Operating Case Temperature	-55 to +125°C
Storage Temperature	-62 to +150°C
"R" Series Burn-In Temperature	+125°C

Thermal Characteristics¹

θ_{JC}	105°C/W
Active Transistor Power Dissipation	250 mW
Junction Temperature Above Case Temperature	27°C

Note 1: For further information, see Reliability Screening, Section 6.

Weight: (typical) 35 grams (with connectors),
(typical) 28 grams (without connectors)









Electrical Specifications

(Measured in 50 Ω system @ +12 VDC nominal unless otherwise noted)

Symbol	Characteristic	Typical $T_c = 25^\circ\text{C}$	Guaranteed Specifications		Unit
			$T_c = 0$ to 50°C	$T_c = -55$ to $+85^\circ\text{C}$	
BW	Frequency Range	1.2-1.4	1.2-1.4	1.2-1.4	GHz
GP	Small Signal Gain (Min.)	38.0	35	35	dB
—	Gain Flatness (Max.)	± 0.3	± 0.5	± 0.5	dB
NF	Noise Figure (Max.)	1.1	1.5	1.5	dB
P _{1dB}	Power Output @ +1 dB Comp. (Min.)	+16.0	13	13	dBm
—	Input VSWR (Max.)	1.1:1	1.5:1	1.5:1	—
—	Output VSWR (Max.)	1.1:1	1.5:1	1.5:1	—
IP ₃	Two Tone 3rd Order Intercept Point	+25.0	—	—	dBm
IP ₂	Two Tone 2nd Order Intercept Point	+32.0	—	—	dBm
HP ₂	One Tone 2nd Harmonic Intercept Point	+38.0	—	—	dBm
—	Operating Voltage	+12 to +15	—	—	V
I _D	DC Current	95	—	—	mA

Typical Performance Over Temperature (@ +12 VDC unless otherwise noted)

Key: +25°C —
 +85°C - - -
 -55°C —

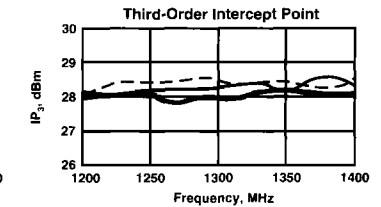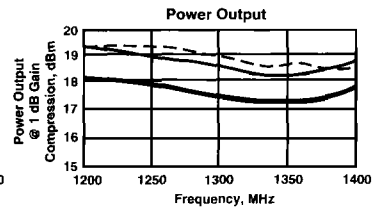

Automatic Network Analyzer Measurements (Typical production unit @ +25°C ambient)

S-Parameters

Bias = 12 Volts, Current = 93 mA

FREQ GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂		K Factor	GPDEL ns	PHASE DEG
	Mag	Ang	dB	Ang	dB	Ang	Mag	Ang			
.50	.87	93.79	28.38	-61.79	-49.52	20.64	.49	98.99	1.33		
.55	.70	82.43	31.17	-88.80	-51.43	124.38	.45	86.19	2.51	1.61	
.60	.63	63.54	33.30	-119.83	-45.87	-114.10	.40	73.98	1.35	1.68	
.65	.48	50.72	34.89	-149.36	-50.30	142.45	.36	62.53	2.10	1.63	
.70	.31	38.42	35.91	-178.32	-49.11	-149.76	.31	51.69	2.02	1.52	
.75	.25	41.93	36.87	155.92	-50.32	88.09	.28	42.12	2.29	1.43	
.80	.17	46.74	37.23	130.39	-51.24	111.79	.25	31.70	2.78	1.34	
.85	.16	60.24	37.81	107.62	-47.06	152.92	.21	19.75	1.57	1.22	
.90	.14	101.17	37.64	86.64	-47.17	-157.41	.17	15.26	1.84	1.20	
.95	.06	157.33	38.09	64.45	-41.19	-34.30	.15	9.06	1.05	1.21	
1.00	.14	100.11	38.35	43.05	-46.61	-144.98	.11	-2.19	1.52	1.06	
1.05	.15	104.62	38.07	26.18	-48.93	-150.10	.10	-5.35	1.85	1.06	
1.10	.14	87.30	38.24	4.91	-47.63	-161.95	.06	-151.53	1.68	0.98	
1.15	.16	110.63	38.91	-9.26	-49.80	14.60	.04	15.93	2.03	0.99	
1.20	.12	84.65	38.25	-30.58	-45.58	143.46	.05	45.04	1.63	1.13	+1.08
1.25	.12	71.67	38.33	-50.10	-40.67	116.52	.06	55.33	1.08	1.06	-0.55
1.30	.12	86.47	38.04	-68.75	-47.06	-112.03	.09	55.88	2.16	0.98	-1.31
1.35	.09	64.24	37.93	-85.37	-47.44	-171.77	.11	55.35	1.71	0.94	-0.04
1.40	.07	52.61	37.56	-102.41	-55.30	-106.75	.13	43.39	4.03	0.96	+0.82
1.45	.05	-32.00	37.50	-119.99	-60.69	74.38	.15	38.92	7.45	1.03	
1.50	.04	-96.65	37.13	-139.32	-41.49	-2.84	.16	30.22	1.10	0.88	
1.55	.07	-64.24	36.58	-151.65	-48.37	-173.34	.17	24.18	2.00	0.85	
1.60	.10	-100.28	36.26	-169.82	-49.21	-47.78	.18	18.44	2.25	0.96	
1.65	.17	-146.70	36.09	173.97	-56.58	49.59	.18	8.88	6.43	0.89	
1.70	.21	-150.77	35.58	158.23	-53.12	-175.37	.20	-58.38	3.63	0.84	
1.75	.17	-165.18	35.15	143.85	-44.84	-97.25	.20	-6.17	1.66	0.76	
1.80	.25	-169.85	34.33	131.04	-55.10	118.54	.19	-12.58	6.20	0.86	
1.85	.29	179.08	34.54	113.20	-49.63	-70.73	.19	-21.94	2.69	0.93	
1.90	.36	167.52	33.93	97.56	-46.63	42.15	.19	-28.63	1.93	0.81	
1.95	.37	158.03	33.72	84.22	-47.18	55.29	.19	-31.42	2.43	0.88	
2.00	.38	144.67	33.51	65.95	-48.55	132.84	.19	-38.82	3.61		

1