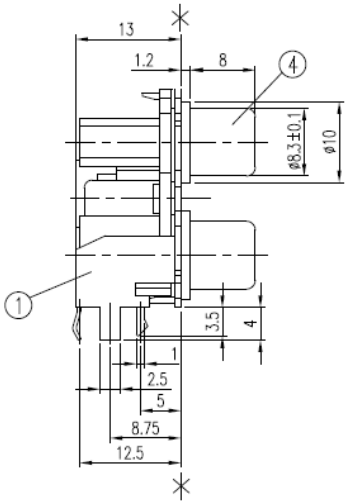

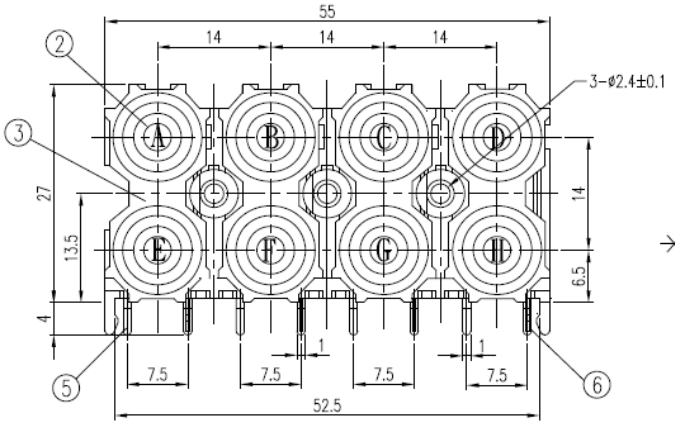

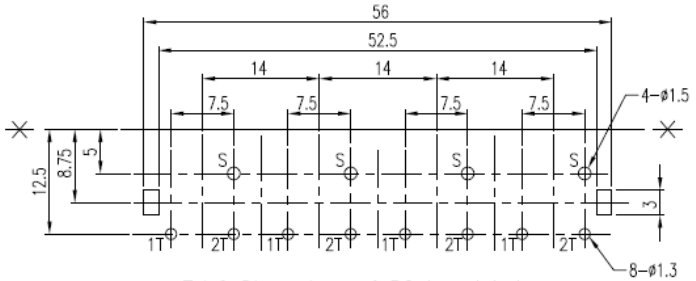

T:1.6 Dimensions of PC board holes

Tolerance : ±0.1(Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

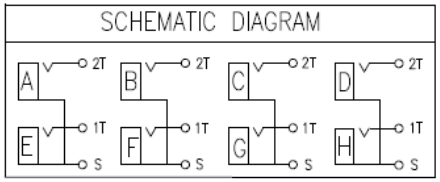

Item	Name	Material	Finish
1	Housing	PBT	UL-94V-0
2	Washer	PBT	UL-94V-0
3	Cover	ABS	UL94V-0
4	Bushing	C2680 t=0.4	MB: Cu Cu/Sn Plated
5	Terminal	C2680 t=0.4	MB: Cu Cu/Sn Plated
6	Terminal	C2680 t=0.4	MB:Cu Cu/Sn Plated

Series	Style	Positions	Metal Cover	Busing Plating	Cover Plating	Terminal Plating	Insulator Color
CPRJ	WSP24	X	X	X	X	X	X (XXXXX)
RCA Phone Jack	Side Entry PCB Mount	1,2,4,6,8	Blank=(plastic) F=Full FG=Full Grounded PR=Pairs CX=Custom	T=Tin (std)	T=Tin (std)	T=Tin (std)	K=Black Y=Gray R=Red G=Green W=White O=Orange E=Yellow B=Brown L=Blue

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	12/29/05
Checked	Lizzy	12/29/05
Drawn	Tina	12/29/05
0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
UNIT: mm		

Central Components Manufacturing

440 Lincoln Blvd., Middlesex, New Jersey 08846

Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPRJ-WSP24-8-X-X-X-X-XX**

Description: Pin Jack