



LEOCO Engineering and Manufacturing standards

HI-REL IC SOCKET OPEN FRAME

MAY 10 1999

8320-***XA00

*** 8320 Series ***

Material :

- * Insulator : UL 94V-0 P.B.T
- * Inner contact : Beryllium Copper
- * Outer sleeve : Brass

Plating :


- * Inner contact : 10 u" gold over nickel
- * Outer sleeve : Tin

Unless otherwise specified tolerance :

.000: ±.10 , .00: ±.20 , .0: ±.30



UNIT : $\frac{\text{mm}}{\text{inch}}$

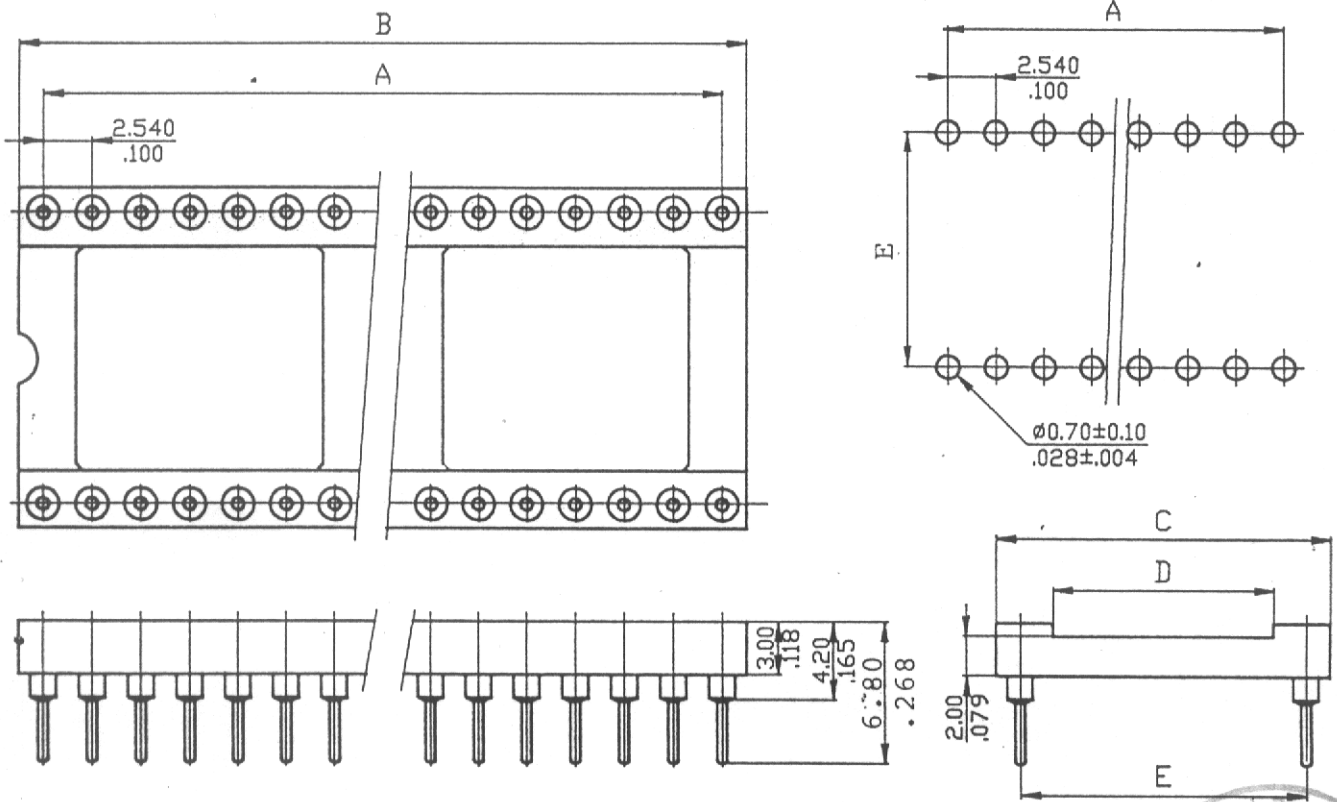

Circuits	A	B	C	D	E
6	5.080(.200)	7.6(.299)	10.14(.399)	4.04(.159)	7.620(.300)
8	7.620(.300)	10.2(.402)	10.14(.399)	4.04(.159)	7.620(.300)
14	15.240(.600)	17.8(.701)	10.14(.399)	4.04(.159)	7.620(.300)
16	17.780(.700)	20.3(.799)	10.14(.399)	4.04(.159)	7.620(.300)
18	20.320(.800)	22.8(.898)	10.14(.399)	4.04(.159)	7.620(.300)
20	22.860(.900)	25.4(1.000)	10.14(.399)	4.04(.159)	7.620(.300)
24	27.940(1.100)	30.5(1.201)	17.72(.698)	11.72(.461)	15.240(.600)
28	33.020(1.300)	35.5(1.398)	17.72(.698)	11.72(.461)	15.240(.600)
32	38.100(1.500)	40.6(1.598)	17.72(.698)	11.72(.461)	15.240(.600)
40	48.260(1.900)	50.8(2.000)	17.72(.698)	11.72(.461)	15.240(.600)
48	58.420(2.300)	60.9(2.398)	17.72(.698)	11.72(.461)	15.240(.600)



LEOCO CORPORATION

8320-***XA00

DRWG/REVISIONS

DATE

SIGN

K. T. T. Y.
Q. D. M.