

Radial Leaded PTC

OZRA Series

RoHS6 Compliant

OZRA1006D



Application

High Current Applications

Product Features

Very High Hold Currents, Low DCR Resistance

Operating (Hold Current) Range

3 A ~ 14A

Maximum Voltage

16V


Temperature Range

-40°C to 85°C

Agency Approval

UL Component (E305051)

Product Dimensions



Part Number	Lead Size Ø	A		B		C		D		E		F	
		Max	Typical	Max	Typical	Min	Max	Typical	Min	Max	Typical	Min	Max
OZRA0300	0.81	7.1	11.0	5.1	7.6	3.0	1.2						
OZRA0400	0.81	8.9	12.8	5.1	7.6	3.0	1.2						
OZRA0500	0.81	10.4	14.3	5.1	7.6	3.0	1.2						
OZRA0600	0.81	10.7	17.1	5.1	7.6	3.0	1.2						
OZRA0700	0.81	11.2	19.7	5.1	7.6	3.0	1.2						
OZRA0800	0.81	12.7	20.9	5.1	7.6	3.0	1.2						
OZRA0900	0.81	14.0	21.7	5.1	7.6	3.0	1.2						
OZRA1000	0.81	16.5	24.1	5.1	7.6	3.0	1.2						
OZRA1100	0.81	17.5	26.0	5.1	7.6	3.0	1.2						
OZRA1200	1.00	17.5	28.0	10.2	7.6	3.6	1.4						
OZRA1400	1.00	27.9	27.9	10.2	7.6	3.6	1.4						

Standard Package

P/N	Bulk		Reel/Tape	
	Pcs/Box	P/N Code	Pcs/Reel	P/N Code
OZRA0300	2000	1C	2500	2D
OZRA0400-0600	3000	1E	2500	2D
OZRA0700-1400	1000	1A	n/a	n/a

Electrical Characteristics (23 °C)

	Part Number	Hold Current I _H , A	Trip Current I _T , A	Max Time to Trip @ 5xI _H Seconds	Max Current I _{max} , A	Rated Voltage V _{max} , V _{dc}	Typical Power P _d , W	Resistance Tolerance		
								R _{min} Ohms	R _{max} Ohms	R _{1max} Ohms
A	OZRA0300	3	5.1	2.0	100	16	2.3	0.034	0.0530	0.105
B	OZRA0400	4	6.8	3.5	100	16	2.4	0.020	0.0350	0.063
C	OZRA0500	5	8.5	3.6	100	16	2.6	0.014	0.0210	0.044
D	OZRA0600	6	10.2	5.8	100	16	2.8	0.009	0.0160	0.033
E	OZRA0700	7	11.9	8.0	100	16	3.0	0.006	0.0130	0.021
F	OZRA0800	8	13.6	9.0	100	16	3.0	0.005	0.0110	0.018
G	OZRA0900	9	15.3	12.0	100	16	3.3	0.004	0.0085	0.015
H	OZRA1000	10	17.0	12.5	100	16	3.3	0.003	0.0075	0.012
I	OZRA1100	11	18.7	13.5	100	16	3.7	0.003	0.0065	0.010
J	OZRA1200	12	20.4	16.0	100	16	4.2	0.002	0.0055	0.009
K	OZRA1400	14	23.8	20.0	100	16	4.6	0.002	0.0045	0.008

I_H Hold current-maximum current at which the device will not trip in still air at 23°C.

I_T Trip current-minimum current at which the device will always trip in still air at 23°C.

I_{max} Maximum fault current device can withstand without damage at rated voltage (V_{max}).

V_{max} Maximum voltage device can withstand without damage at its rated current.

P_d Typical power dissipated from device when in the tripped state in 23°C still air environment.

R_{min} Minimum device resistance at 23°C.

R_{max} Maximum device resistance at 23°C.

R_{1max} Maximum device resistance at 23°C, 1 hour after initial device trip.

Physical specifications

Lead material

OZRA0300 ~ OZRA1100 - Tin plated copper, 20 AWG.

OZRA1200 ~ OZRA1400 - Tin plated copper, 18 AWG.

Soldering characteristics

MIL-STD-202, Method 208E.

Insulating coating

Flame retardant epoxy, meets UL-94-V-0 requirements.

PTC Marking

"bel" or "b", IH code and "RA".

Radial Leaded PTC


OZRA Series

RoHS6 Compliant


OZRA1006C

Typical Time - To - Trip at 23°C

(See Elec. Characteristics Table for P/N - Curve Correlation)

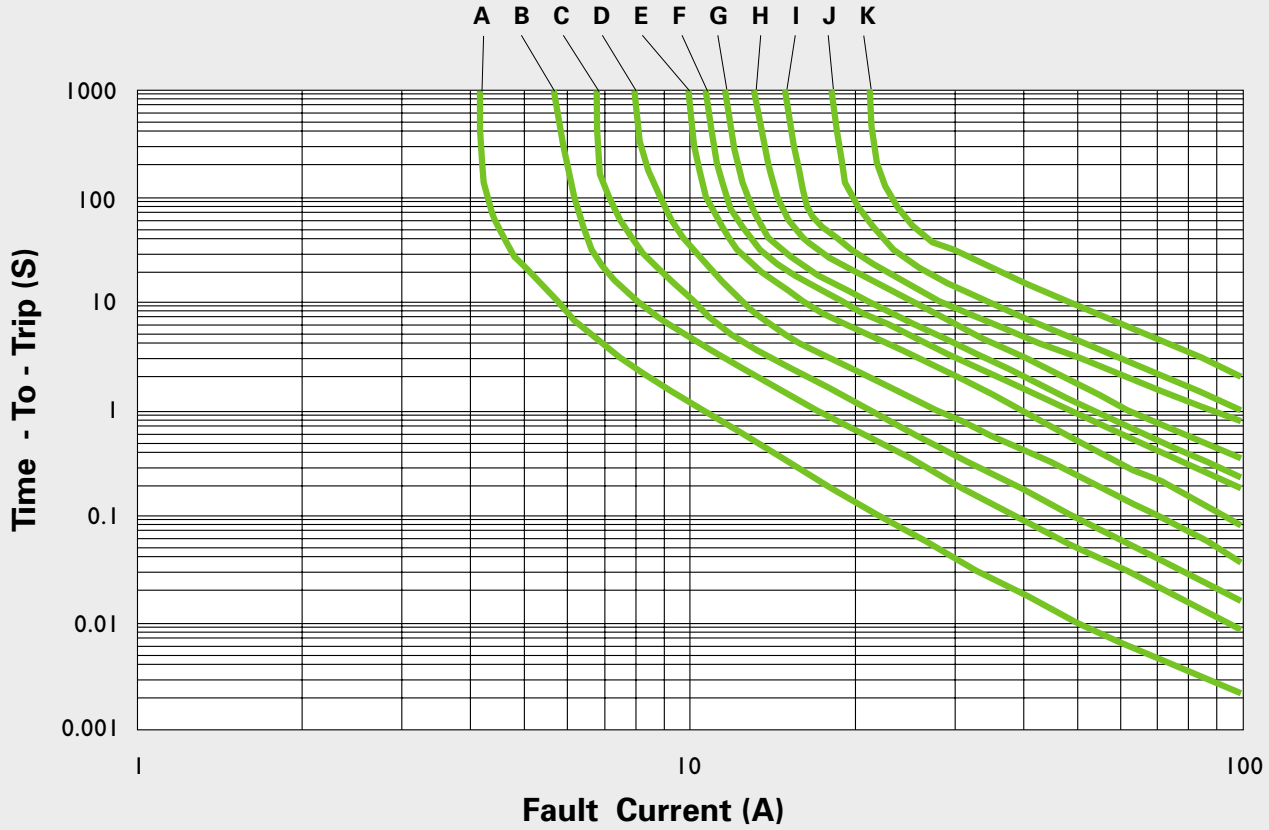

Thermal Derating Curve

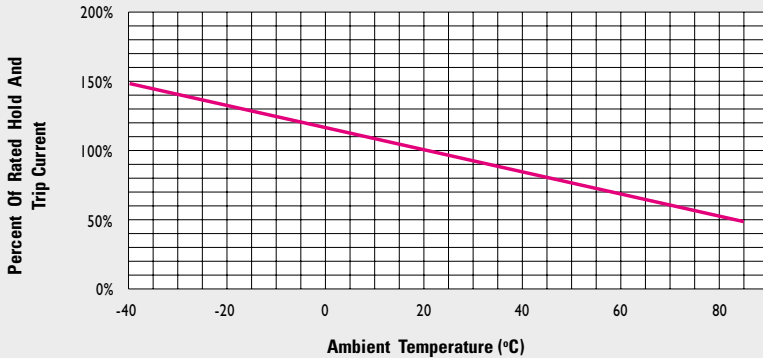

Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/ or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.

Specifications subject to change without notice

Corporate Office

Bel Fuse Inc.
 206 Van Vorst Street, Jersey City, NJ 07302
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: belfuse@belfuse.com
 Website: www.belfuse.com

Far East Office

Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office

Bel Stewart GmbH
 Industriestrasse 20
 61381 Friedrichsdorf
 Germany
 Tel: 49.6172.9552.0
 Fax: 49.6172.9552.40