


REVISIONS	
A	07/01/91 EN-3350
RELEASE FOR PRODUCTION	
B	10/16/91 EN-3367
ADD IN PROCESS VIEW	
C	02/07/92 EN-3619
SPECIFY USE IN PLATING OPTION & POLARIZING KEY.	

UNLESS OTHERWISE NOTED	
DIMENSIONS ARE IN INCHES	TOLERANCES ARE:
ONE PLACE DECIMALS ±.1	THREE PLACE DECIMALS ± .005
TWO PLACE DECIMALS ±.01	FOUR PLACE DECIMALS ± .0020

TITLE:	100 ♀ IDC MOLD TO POSITION FEMALE SUB-ASSEMBLY
DWG NO:	FSB-XX-X-S-X

TITLE:		100 ♀ IDC MOLD TO POSITION FEMALE SUB-ASSEMBLY
DWG NO:		FSB-XX-X-S-X

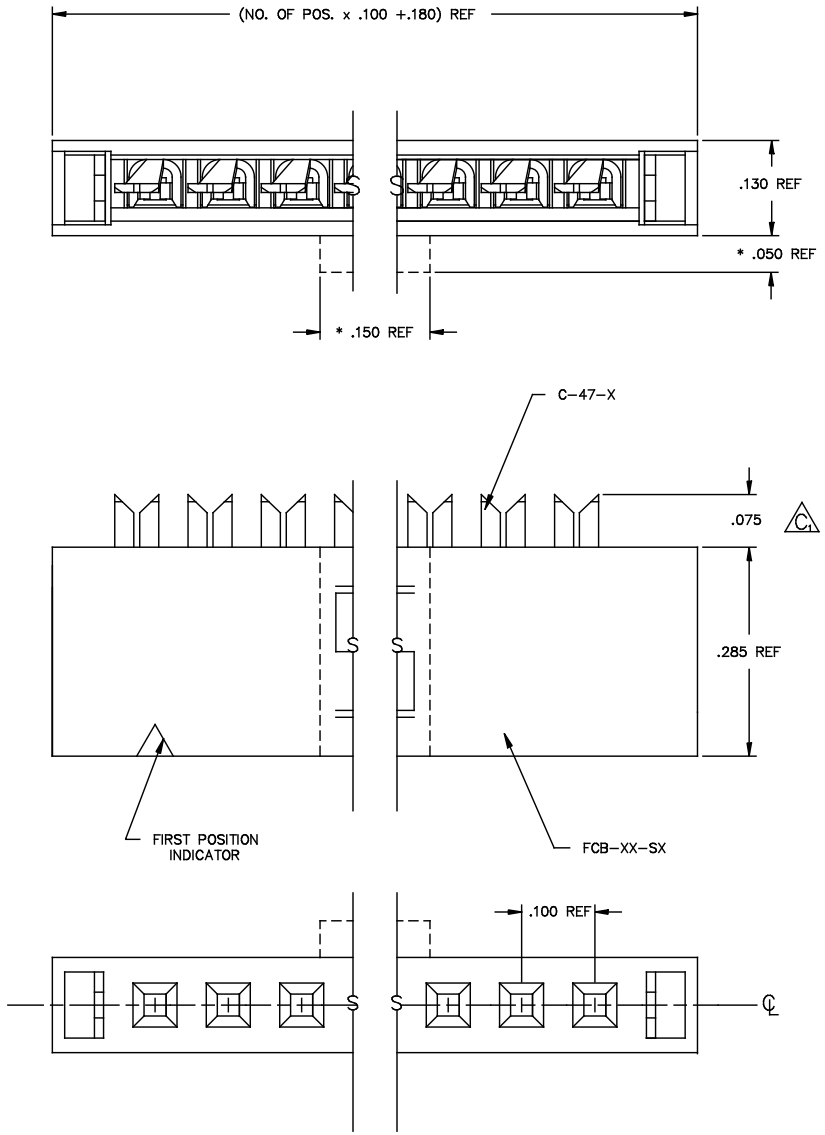


FSB-XX-X-S-X

POLARIZING KEY
-P: (SEE NOTE 2)
USE FCB-XX-SP LEAVE BLANK FOR STANDARD (USE FCB-XX-S)

PLATING OPTION
-T: TIN PLATING (USE C-47-T)
-S: SELECTIVE PLATING (STANDARD) (USE C-47-S)

NO. OF POSITIONS
-02 THRU -36

- NOTES**
1. RETENTION FORCE OF CONTACT IN BODY TO BE 2 lbs. MIN.
 2. * = OPTIONAL POLARIZING KEY - NOT AVAILABLE ON POS. -02 THRU -05.
 3. ⚠ REPRESENTS CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL.

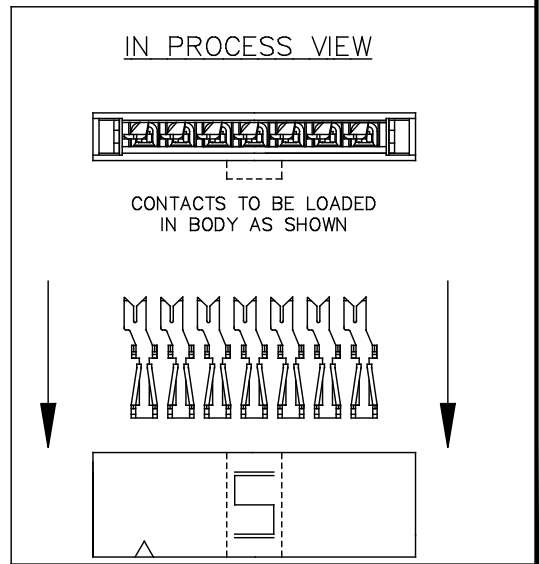

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

samtec

810 PROGRESS BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:	KOLB 1-17-90	ENG. APPROVAL:	DEM	FSB-XX-X-S-X
CHECKED BY:	McCARTIN			SHEET 0F

EP\CABLE
FSBASM-S