


More Precision.

induSENSOR Linear inductive displacement sensors





LVDT series: Displacement sensors with external electronics




Measurement ranges ±1 ... ±25 mm Extremely accurate also under difficult ambient conditions Long-term stability

Wear-free

Easy installation

Displacement sensors have a plunger which moves freely in the sensor housing. The plunger is joined to the object by a thread to transfer the movement of the measurement object. The measurement process in the sensor takes place without contact and is therefore wear-free. The displacement sensors are mainly used to measure and monitor movements, displacements, positions, strokes, deflections, dislocations, etc. in vehicles, machines and systems. The high sensor resolution is limited only by the noise in the sensor electronics. A further advantage of the symmetrically constructed sensors in the LVDT series is the zeropoint stability of the systems. The sensors are supplied with an excitation frequency of 1 to 5 kHz depending on the measurement range and an excitation amplitude of 2.5 to 5 Vrms. Matched sensor electronics are available in this respect. With appropriate setting possibilities for the excitation frequency and amplitude, the sensors can also be operated with alternative electronics.

Article

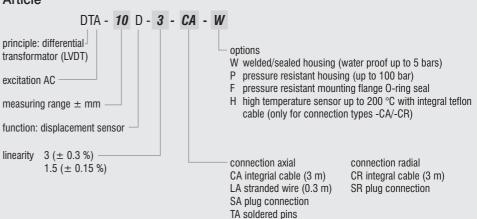


Model Connection		DTA-1D- DTA-3D-			DTA-5D- DTA-10D-				DTA-15D-					DTA-25D-								
		ТА	CA SA	ΤА	CA	SA	ТА	CA	SA	LA	CA	SA	LA	C	A CF	SA	SR	LA	CA	CR	SA	SR
Measuring I	range	±1 mm		±3 mm		±5 mm		±10 mm		m	±15 mm				±25 mm							
stanc	standard ± 0.3 %	6	βµm	18 µm			30 <i>µ</i> m			60 µm			90 <i>µ</i> m				150 <i>µ</i> m					
Linearity	option ±0.15 %	3 µm		9 <i>µ</i> m		15 <i>µ</i> m			30 µm	ı			45 μ	m				-				
Excitation fr	equency	5 kHz							2 kHz		1 kHz											
Excitation a	mplitude	5 V _{eff}							2.5 V _{eff}													
Sensitivity		133 r	mV/Vmm	85 mV/Vmm 53 mV/Vmm			mm	44 mV/Vmm			45 mV/Vmm					33 mV/Vmm						
Temperatur range	e -20 °C 80 °C -20 °C 120 °C	•	• •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Storage temperature			-40 °C +80 °C / +120 °C																			
		zero ±50 ppm/°C																				
Temperatur	e stability	sensitivity ±100 ppm/°C																				
Housing		stainless steel including magnetic shielding																				
Bending rad	dius cable	20 mm																				
Outer cable	diameter	~4.6 mm																				
Protection of	lass	IP 67																				
Observel	IEC 68-2-29	40 g, 1000 shocks / axis																				
Shock	IEC 68-2-27	, 100 g, 3 shocks/direction																				
Vibration	IEC 68-2-6	10 Hz 58 Hz ±1.5 mm / 58 Hz 500 Hz ±20 g																				

FSO = Full Scale Output

Basic model		DTA-1D-		DTA-3D-		DTA-5D-		DTA-10D-		DTA-15D-				DTA-25D-									
Connection		ТА	CA	SA	ТА	CA	SA	ΤА	CA	SA	ТА	CA	SA	LA	CA	CR	SA	SR	LA	CA	CR	SA	SR
Length of housing L	mm	30	40	40	47	57	57	63	73	73	78	87	87	93	106.5			129.5	143.5				
Length of plunger I ¹	mm	19 29			30			35			51					62							
Housing diameter	mm	1			0					20													

1) Plunger in zero position (± 10 % of measuring range ± 1 mm)

sensor types with measuring range up to $\pm 10 \text{ mm}$ (inner diameter ø2.7 mm)




type - TA with axial solder pins


type - CA with integral cable




type - SA with axial plug connection



11.4

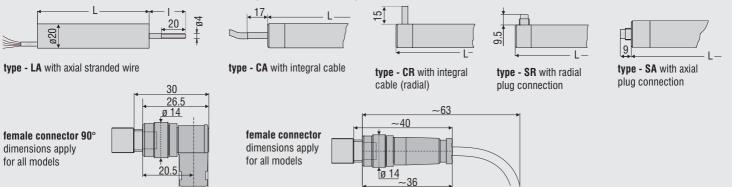

Sensor system with miniature sensor and on-board electronics KRS719(01)

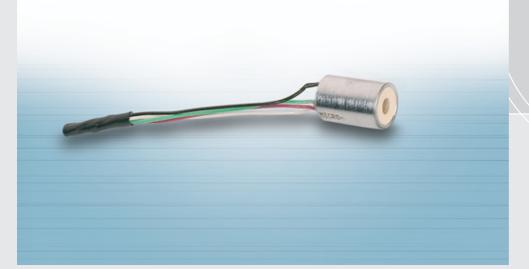


Compact design Calibrated system On-board electronics

Model		KRS719(01)						
Article		4350026.01						
Measuring principle		LVDT (page 6)						
Measuring range		± 1 mm						
Target (included)		plunger 0800080 (ø2 x 62 long)						
raiget (included)		with thread M4x0.5 (15 mm long)						
Linearity		±0.15 % FSO (3 μm)						
Resolution		0.07% FSO (1.4 μm)						
Frequency response		100 Hz (-3dB)						
Housing		nickel-plated steel						
Temperature stability		zero \pm 50 ppm / °C						
Output		4 20 mA						
		options: 2 20 mA / \pm 3.9 VDC						
Power supply		22.8 25.2 VDC						
Temperature range	sensor	-20°C +80°C						
remperature range	electronics	0° C +50°C						
Adjustment		zero, gain						
Protection class		IP 67						
Electronics		incl. circuit board BSC719(02)-I, article 2208078.02						

monitoring the yarn thickness in textile machines. The miniaturized sensor and the board-mounted electronics can be costeffectively integrated into the available installation spaces and machine controllers. The system is characterized by high stability and repeatability.

The KRS719 sensor system is used for




The plunger can be introduced into the sensor from both ends.

Miniature sensor with radial cable output DTA-0,8D-2,5-LR

OEM sensor for large-scale applications Miniaturized design Radial cable output High accuracy


The miniature sensor DTA-0,8D-2,5-LR was designed and developed for use where the installation space is restricted. In addition, due to the low core weight the dynamic response of the measurement object is retained and mechanical loads are minimized.

Due to the radial cable output, the installation space behind the sensor can be fully exploited. With a linearity of <0.25% this sensor model is also suitable for measurements with high accuracy requirements.

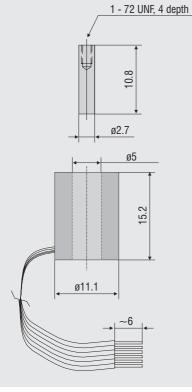

Model	DTA-0,8D-2,5-LR					
Article	2611045					
Measuring principle	LVDT (page 6)					
Measuring range	±0.8 mm					
Linearity	$<\!0.25\%$ FSO at 5 V _{eff} / 12.5 kHz (4 $\mu\text{m})$					
Excitation frequency	1 - 20 kHz					
Excitation amplitude	up to 10 V_{eff}					
Target (included)	core 0304028 (ø2.7 x 10.8 long)					
Target (included)	with thread 1-72UNF (4 depth)					
Housing	nickel-plated steel					
Temperature stability sensor	zero: ±50 ppm / °C					
Temperature range sensor	-20° C +80° C					
Protection class sensor	IP 65					
Electronics	ISC7001					


Miniature sensor with axial cable output DTA-1D-CA-U

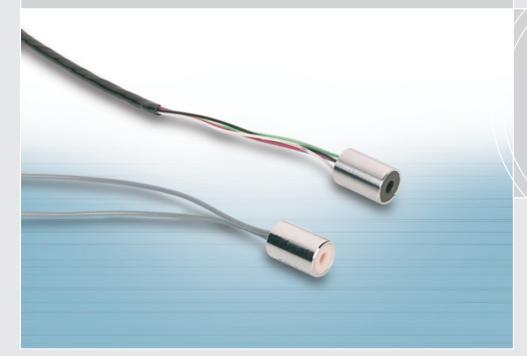

OEM sensor for large-scale applications Miniaturized design Axial cable output

As the sensor DTA-0,8D-2,5-LR, the miniature sensor DTA-1D-CA-U was designed and developed especially for used in restricted installation space. Due to the low core weight, the measurement object dynamic response is retained and mechanical loads are minimized.

With this configuration the cable output is brought out axially so that the installation space surrounding the sensor can be fully exploited. This means, for example, that the sensor can be installed sunk into a hole.

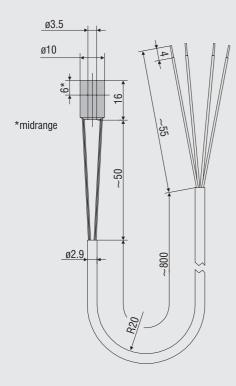


Model	DTA-1D-CA-U						
Article	2611037						
Measuring principle	LVDT (page 6)						
Measuring range	±1.0 mm						
Linearity	$<$ 0.5 % FSO at 2.5 V $_{\rm eff}$ / 5 kHz (0.01 mm)						
Excitation frequency	1 - 20 kHz						
Excitation amplitude	up to 10 V_{eff}						
Target (not included)	plunger 0800080 (ø2 x 62 long) with thread M4 x 0.5 (15 long)						
Sensitivity	155mV / Vmm at 2.5 V _{eff} / 5 kHz						
Housing	nickel-plated steel						
Temperature stability sensor	zero:± 50 ppm / °C						
Temperature range sensor	- 20° C + 80° C						
Protection class sensor	IP 67						
Electronica	MSC710						
Electronics	ISC7001						


FSO = Full Scale Output

Sensor with coated coil DTA-1D-20-DDV.02

Proven OEM sensor Miniature design Low cost sensor

Taking into account economic boundary conditions, with the sensor line DTA-1D-20-DDV the external, mechanical sensor housing has been omitted. To protect the measurement coils the sensor has been fully coated with a protective epoxy.





Model	DTA-1D-20-DDV.02				
Article	2611011				
Measuring principle	LVDT (page 6)				
Measuring range	±1 mm				
Excitation frequency	0.5 10 kHz				
Excitation amplitude	up to 10 V _{eff}				
arget	customer specific				
inearity	< 1% FSO (0.02 mm)				
lousing	protective epoxy				
emperature stability sensor	zero: \pm 50 ppm / °C				
emperature range sensor	-20° C + 85° C				
Protection class sensor	IP 64				
lastronica	MSC710				
Electronics	ISC7001				

FSO = Full Scale Output


Sensor for valve stroke measurements DTA-6D-20 (07)



Sensor for large-scale use for valve stroke measurements Well-proven OEM sensor Plastic housing

Due to the use of a plastic housing, the sensor DTA-6D-20(07) can be offered at a very reasonable price. The configuration of the sensor facilitates, depending on the plunger used, a useful measurement range of $\pm 2 \text{ mm}$ to $\pm 8 \text{ mm}$.


In a typical application this sensor is used for the measurement of the piston position in hydraulic valves. To facilitate exact dosage and therefore also a controlled movement, displacement sensors of the product line DTA-6D-20 are integrated into these valves. The sensors acquire the position of the control plunger, controlling the volume flow. To do this, an accurate, non-contacting and primarily dynamic position acquisition is required. The sensor is mounted here outside of the pressurized area on a pressure pipe.



DTA-6D-20(07)						
2611043						
LVDT (page 6)						
±2 ±8 mm						
${<}0.5$ % FSO at 2.5 $V_{\text{eff}}/$ 5 kHz*						
1 - 20 kHz						
up to 10 V_{eff}						
core 0304034 (ø2 x 28)						
pressure tube 0483331 (ø5 x 0.2)						
plastics						
zero: ±50 ppm / °C						
-20° C + 80° C						
IP 67						
MSC710						
ISC7001						

* measuring range ± 6 mm


Pressure resistant sensor with welded flange DTA-15D-5-CA-(03)

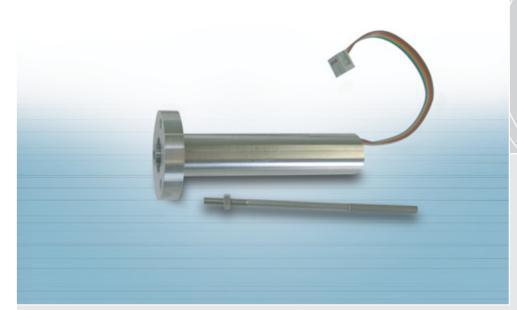

Pressure resistant version Laser-welded stainless steel housing Integrated flange External electronics

For displacement measurements in applications with a very high ambient pressure, sensors of the series LVDT are integrated into a laser-welded, pressure resistant housing with an O-ring seal. The integrated flange facilitates simple sensor mounting.

Model	DTA-15D-5-CA-(03)					
Article	2607026.03					
Measuring principle	LVDT (page 6)					
Measuring range	±15 mm					
Linearity	±0.5 % FSO					
Excitation frequency	1 kHz					
Excitation amplitude	2.5 V _{eff}					
Target (pet included)	plunger 0800062 (ø4 mm, 108 mm long					
Target (not included)	thread M4 (20 mm long)					
Housing	stainless steel					
Temperature stability sensor	zero: ±50 ppm / °C					
Temperature range sensor	-20° C + 85° C					
Pressure resistance	150 bar					
Flastranias	MSC710					
Electronics	ISC7001					

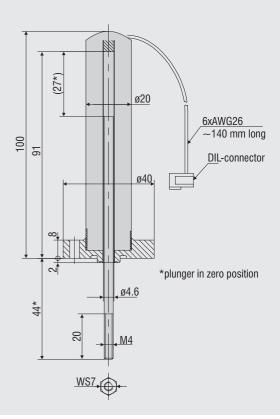


Half-bridge sensor with plastic housing DRA-25D-20-SR-02

Plastic housing Integrated Rast 2.5 plug Extrusion coated core

The displacement sensor DRA-25D-20-SR(02) has been derived from the wellproven large-scale applications system for loading and unbalance detection in washing machines. The sensor is particularly well suited for applications in which displacements of up to 50 mm must be acquired economically and reliably. The sensor is integrated and protected within the machine or equipment. The integral 3pole plug corresponds to the standardized Rast 2.5 dimensions.

Model	DRA-25D-20-SR					
Article	2611031					
Measuring principle	half-bridge					
Measuring range	50 mm (±25 mm)					
Linearity	±1 % FSO (0.5 mm)					
Excitation frequency	500 Hz					
Excitation amplitude	5 V _{eff}					
Target (not included)	plunger 0800077 (ø4.76 x 98 long) with inner thread M2.5 (6 depth)					
Housing	plastic					
Temperature stability sensor	± 0.01 % / °C (core in midrange)					
Temperature range sensor	-20° C +70° C					
Protection class sensor	IP 40					
Flashenias	MSC7210					
Electronics	ISC7001					

FSO = Full Scale Output



*) midrange


MSC710 sensor controller for LVDT series




Excellent linearity and resolution Zero and gain adjustable coarse/fine Excitation frequency 1 ... 10 kHz (selectable)

Compact and robust EMI-proofed housing

The MSC710 is a single-channel miniature sensor controller for the operation of inductive displacement sensors based on the LVDT principle (Linear Variable Differential Transformer). Its compact, but rugged design, makes it suitable for both industrial and laboratory applications. Easily accessible and simple to operate, by using DIP-switches. The electronic unit can be matched to a wide range of sensors.

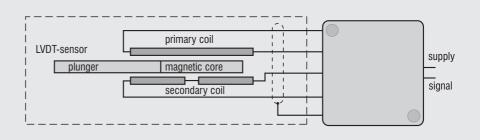

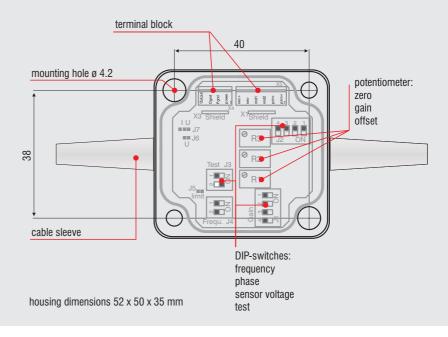

Model		MSC710-U	MSC710-I					
Power supply		18 30 VDC	(18 45 mA)					
Protection		Reverse plarity protection, overvoltage protection						
Sensor principle		for LVDT	sensors					
0		150	400 mV					
Sensor excitation		1/2/5 kHz (selectab	ole by DIP-switches)					
Input impedance	sensor	10 k	Ohm					
gai		-20+350	% (trimpot)					
Range	zero	±50 % (trimpot)						
Output signal		2 10 VDC (R _a >1 kOhm)	4 20 mA (load <500 Ohm)					
		$< 1.5 \text{ mV}_{eff}$ *	$< 3\mu A_{eff}^{\star}$					
Noise		$< 15 \mathrm{mV_{ss}}$	$<$ 30 μA_{ss}					
Linearity		<0.02 % FSO						
Frequency response		300 Hz (-3dB)						
Terrereture recerci	storage	-40 °C +85 °C						
Temperature range	operating	0 °C +70 °C						
Temperature stability		±100 pmm / °C						
Protection class		IP	65					
Weight		80 g						
Housing material		ABS-plastic						
		EN 50081-2 (spurious emission)						
Electromagnetic compatibility (EMC)		EN 50082-2 (immunity to interference)						
Vibration		EN 60068-2-64 (noise)						
Shock		EN 60068-2-29 (continous shock)					

FSO = Full Scale Output * RMS AC-Measuring, Frequency 3 Hz ... 300 Hz

More Precision.

www.micro-epsilon.com

Sensors and systems

for displacement, position and dimension

Sensors and measurement devices for non-contact temperature measurement

Measurement systems for online/offline quality control

MICRO-EPSILON Headquarters

Koenigbacher Str. 15 · 94496 Ortenburg / Germany Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90 info@micro-epsilon.com

MICRO-EPSILON UK Ltd.

Dorset House, West Derby Road · Liverpool, L6 4BR Phone +44 (0) 151 260 9800 · Fax +44 (0) 151 261 2480 info@micro-epsilon.co.uk

MICRO-EPSILON USA

8120 Brownleigh Dr. · Raleigh, NC 27617 / USA Phone +1/919/787-9707 · Fax +1/919/787-9706 info@micro-epsilon.us

MICRO-EPSILON