


BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC PLUG — STRAIGHT




| S/C Part No. | UG-U No. | Cable RG-U | Dimension | | Engr. Data | Assy. Inst. |
|--------------|-----------|---------------------------|-----------|------|---|-------------|
| | | | A | B | | |
| 28P102-1 | | 58 | 1-1/16 | 1/2 | Straight Cut Style Hardware | AI-12 |
| 28P102-2 | | 59 | 1-1/16 | 1/2 | Straight Cut Style Hardware | AI-12 |
| 28P102-3 | | 174 | 1-1/16 | 1/2 | Straight Cut Style Hardware | AI-12 |
| 28P102-4 | | 233 | 1-1/16 | 1/2 | Straight Cut Style Hardware | AI-12 |
| 28P102-7 | | 122 | 1-1/16 | 1/2 | Straight Cut Style Hardware | AI-12 |
| 28P102-18 | | 302 | 1-1/16 | 1/2 | Straight Cut Hardware | AI-12 |
| 28P102-19 | | 180,195 | 1-1/16 | 1/2 | Straight Cut Hardware | AI-12 |
| 28P103-1 | UG-260 U | 59,62,71 | 63.64 | 7/16 | Unimproved Hdwe. Rexolite Ins. | AI-14 |
| 28P104-1 | UG-88C/U | 55,58, 141,142, 223 | 1-3/64 | 1/2 | Improved Hdwe. W/O Washer | AI-14 |
| 28P108-1 | | .141 OD SR | 1-3/64 | 1/2 | Plug-in, Semi-Rigid Cable | AI-21 |
| 28P108-2 | | .085 OD SR | 1-3/64 | 1/2 | Plug-in, Semi-Rigid Cable | AI-21 |
| 28P108-3 | | .250 OD SR | 1-3/64 | 1/2 | Plug-in, Semi-Rigid Cable | AI-21 |
| 28P108-4 | | .215 OD SR | 1-3/64 | 1/2 | Plug-in, Semi-Rigid Cable | AI-21 |
| 28P109-1 | | 55,58, 141,142, 223 | 1-3/64 | 1/2 | Captive Contact Improved Hdwe. W/O Washer | AI-20 |
| 28P109-2 | | 59,62,71 210 | 1-3/64 | 1/2 | Captive Contact Improved Hdwe. W/O Washer | AI-20 |
| 28P113-1 | | 174,179A 187,188 | 1-3/64 | 1/2 | Improved Hdwe. W/O Washer | AI-14 |
| 28P113-2 | | 180,195 | 1-3/64 | 1/2 | Improved Hdwe. W/O Washer | AI-14 |
| 28P113-3 | | 179 | 1-3/64 | 1/2 | Improved Hdwe. W/O Washer | AI-14 |
| 28P114-1 | | 178,196 | 1-3/64 | 1/2 | Improved Hdwe. W/O Washer | AI-14 |
| 28P129-1 | UG-88 U | 55,58 | 63.64 | 7/16 | Unimproved Hdwe. | AI-14 |
| 28P135-1 | UG-959A/U | 8,9,213, 214 | 1-5/8 | 3/4 | Improved Hdwe. | AI-87 |
| 28P136-1 | UG-88E/U | 58,59,141, 142,223 | 1-3/64 | 1/2 | Improved Hdwe. | AI-14 |
| 28P145-1 | UG-260A/U | 59,62,71 | 63.64 | 7/16 | Not Weatherproof, Rexolite Ins. | AI-14 |
| 28P146-1 | | 174,179A 187,188 | 63.64 | 7/16 | Unimproved Hdwe. Rexolite Ins. | AI-14 |
| 28P146-2 | | 180,195 | 63.64 | 7/16 | Unimproved Hdwe. Rexolite Ins. | AI-14 |
| 28P146-3 | | 179 | 63.64 | 7/16 | Unimproved Hdwe. Rexolite Ins. | AI-14 |
| 28P147-1 | UG-260D/U | 59,62,71 | 1-3/64 | 1/2 | Improved Hdwe. | AI-14 |
| 28P147-3 | UG-260C/U | | | | | |
| 28P153-1 | UG-88B/U | 55,58 | 63.64 | 7/16 | Not Weatherproof | AI-14 |
| 28P154-1 | | 58 | 1-1/16 | 1/2 | Straight Cut Style-Crimp Contact | AI-27 |
| 28P206-1 | | .141 O.D. S.R. | 51/64 | — | Solder on Style | AI-27 |
| 28P225-1 | | 178,196 | 1-1/16 | 1/2 | Straight Cut Hardware | AI-55 |
| 28P226-4 | | 8,213 | 1-9/16 | 3/4 | Straight Cut Hardware | AI-81 |
| 28P226-6 | | 9,214 | 1-9/16 | 3/4 | Straight Cut Hardware | AI-81 |
| 28P226-7 | | Belden 8214 | 1-9/16 | 3/4 | Straight Cut Hardware | AI-81 |
| 28P248-1 | | Belden 8281 | 1-1/16 | 9/16 | Straight Cut Hardware | AI-12 |
| 28P254-1 | | .141 O.D. S.R. | 1-3/64 | 1/2 | Solder on Bushing | AI-27 |
| 28P265-1 | | 58,223 | 1-5/64 | 1/2 | M39012-16-0101 | AI-20 |
| 28P265-2 | | 59,62 | 1-5/64 | 1/2 | M39012-16-0102 | AI-20 |
| 28P265-3 | | 122 | 1-5/64 | 1/2 | M39012-16-0103 | AI-20 |
| 28P265-4 | | 303 | 1-5/64 | 1/2 | M39012-16-0111 | AI-20 |
| 28P265-5 | | 302 | 1-5/64 | 1/2 | M39012-16-0118 | AI-20 |

BNC PLUG — STRAIGHT — LONG CRIMP





| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | Engr. Data | Assy. Inst. |
|--------------|---------------------|------------|-----------|------|---------------------------|-------------|
| | | | A | B | | |
| 28P106-1 | 58,141 | .213 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-2 | 59,62,140 | .255 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-3 | 55,142,223 | .213 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-4 | 71 | .268 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-5 | 122,180,195 | .178 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-7 | 178,196 | .105 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P106-11 | 174,179,316 | .128 HEX | 1 1/2 | 7/16 | Captive Contact | AI-37 |
| 28P115-1 | Amphenol 621-111 | .384 HEX | 1 17/32 | 1/2 | Captive Contact | AI-37 |
| 28P213-3 | 58,141 | .213 HEX | 1 27/32 | 9/16 | Booted Captive Contact | AI-37 |

BNC PLUG — STRAIGHT — SHORT CRIMP



| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | Engr. Data | Assy. Inst. |
|--------------|-------------|----------------------|-----------|-----------------------------|-------------|
| | | | A | | |
| 28P107-1 | 58,141 | .213 HEX | 1-11/64 | | AI-26 |
| 28P107-2 | 59,62,140 | .255 HEX | 1-11/64 | | AI-26 |
| 28P107-3 | 55,142,223 | .213 HEX | 1-11/64 | | AI-26 |
| 28P107-5 | 122,180,195 | .178 HEX | 1-11/64 | | AI-26 |
| 28P184-1 | 174 | .178 HEX | 1-11/64 | | AI-26 |
| 28P200-1 | 55,223 | .212 HEX .255 HEX | 1-25/64 | Crimp Braid Crimp Jacket | AI-26 |
| 28P270-6 | 58,303 | .213 HEX | 1-1/8 | Crimp Captive Contact | AI-26 |
| 28P270-8 | 59 | .255 HEX | 1-1/8 | Crimp Captive Contact | AI-26 |
| 28P270-10 | 55,223,400 | .213 HEX | 1-1/8 | Crimp Captive Contact | AI-26 |
| 28P278-1 | 8,213 | .429 HEX | 1-11/16 | Crimp Captive Contact | AI-26 |
| 28P278-2 | 9,214 | .429 HEX | 1-11/16 | Crimp Captive Contact | AI-26 |

BNC RIGHT ANGLE




| S/C Part No. | UG-U No. | Cable RG-U | Dimension | | Engr. Data | Assy. Inst. |
|--------------|----------|------------|-----------|-------|--------------------|-------------|
| | | | A | B | | |
| 28P143-1 | | 55,58 | 1-3/16 | 15/16 | Unimproved Hdwe. | AI-46 |
| 28P143-2 | | 59,62,71 | 1-3/16 | 15/16 | Unimproved Hdwe. | AI-46 |
| 28P143-4 | | 187,188 | 1-3/16 | 15/16 | Unimproved Hdwe. | AI-46 |
| 28P234-1 | | 180,195 | 1-3/16 | 63/64 | Straight Cut Style | AI-46 |
| 28P234-2 | | 59,62 | 1-3/16 | 63/64 | Straight Cut Style | AI-46 |
| 28P242-1 | | 58,223 | 1-3/16 | 1 | Improved Hdwe. | AI-46 |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC RIGHT ANGLE

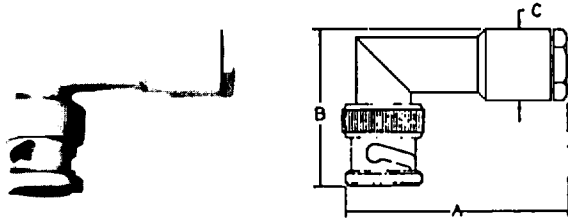


| S/C Part No. | UG-U No. | Cable RG-U | Dimension | | | Engr. Data | Assy. Inst. |
|--------------|-----------|----------------------|-----------|--------|-----|--------------------------|-------------|
| | | | A | B | C | | |
| 28P100-1 | UG-913A-U | 55,58,141 142,223 | 1-9/16 | 1-3/32 | 1/2 | Improved Hdwe. | AI-14 |
| 28P100-3 | UG-913-U | 59,62,71 | 1-9/16 | 1-3/32 | 1/2 | Improved Hdwe. | AI-14 |
| 28P101-1 | | 55,58,141 142,223 | 1-9/16 | 1-3/32 | 1/2 | Improved Hdwe W/O Washer | AI-14 |
| 28P132-1 | | 58 | 1-9/16 | 1-3/32 | 1/2 | Improved Straight Cut | AI-12 |
| 28P132-2 | | 59 | 1-9/16 | 1-3/32 | 1/2 | Improved Straight Cut | AI-12 |
| 28P132-3 | | 174 | 1-9/16 | 1-3/32 | 1/2 | Improved Straight Cut | AI-12 |
| 28P132-4 | | 223 | 1-9/16 | 1-3/32 | 1/2 | Improved Straight Cut | AI-12 |
| 28P132-8 | | 303 | 1-9/16 | 1-3/32 | 1/2 | Improved Straight Cut | AI-12 |
| 28P232-1 | | 8,213 | 1-43/64 | 1-7/32 | 3/4 | Improved Straight Cut | AI-12 |
| 28P232-2 | | 9,214 | 1-43/64 | 1-7/32 | 3/4 | Improved Straight Cut | AI-12 |

BNC PLUG — RIGHT ANGLE — SHORT CRIMP

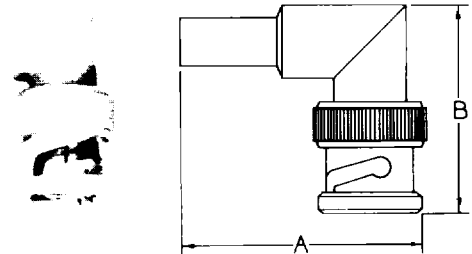


| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | Engr. Data | Assy. Inst. |
|--------------|-------------|------------|-----------|--------|-----------------------|-------------|
| | | | A | B | | |
| 28P150-1 | 58,141 | .213 HEX | 1-17/32 | 1-1/32 | | AI-26 |
| 28P150-2 | 59,62,140 | .255 HEX | 1-17/32 | 1-1/32 | | AI-26 |
| 28P150-3 | 55,142,223 | .213 HEX | 1-17/32 | 1-1/32 | | AI-26 |
| 28P150-4 | 71 | .268 HEX | 1-17/32 | 1-1/32 | | AI-26 |
| 28P150-5 | 122,180,195 | .178 HEX | 1-17/32 | 1-1/32 | | AI-26 |
| 28P271-5 | 59 | .255 HEX | 1-21/32 | 1-1/32 | Crimp Captive Contact | |
| 28P271-6 | 58,303 | .213 HEX | 1-21/32 | 1-1/32 | Crimp Captive Contact | |
| 28P271-7 | 223,400 | .213 HEX | 1-21/32 | 1-1/32 | Crimp Captive Contact | |
| 28P279-1 | 8,213 | .429 HEX | 1-13/16 | 1-1/8 | Crimp Captive Contact | |
| 28P279-2 | 8,214 | .429 HEX | 1-13/16 | 1-1/8 | Crimp Captive Contact | |

BNC PLUG — RIGHT ANGLE — LONG CRIMP

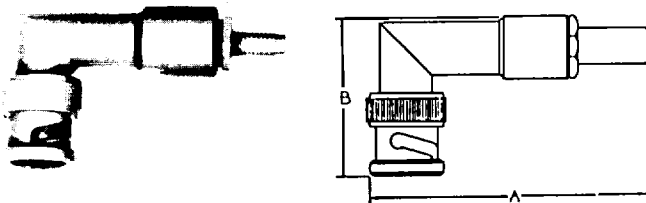

| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | Engr. Data | Assy. Inst. |
|--------------|-------------|------------|-----------|--------|-----------------|-------------|
| | | | A | B | | |
| 28P149-1 | 58,141 | .213 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-2 | 59,62,140 | .255 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-3 | 55,142,223 | .213 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-4 | 71 | .268 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-5 | 122,180,195 | .178 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-7 | 178,196 | .105 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P149-10 | 174,179,316 | .128 HEX | 1-27/32 | 1-3/32 | Captive Contact | AI-37 |
| 28P287-1 | 55,223 | .213 HEX | 2-7/32 | 1-1/8 | Booted | AI-37 |

BNC PLUG CAP & CHAIN

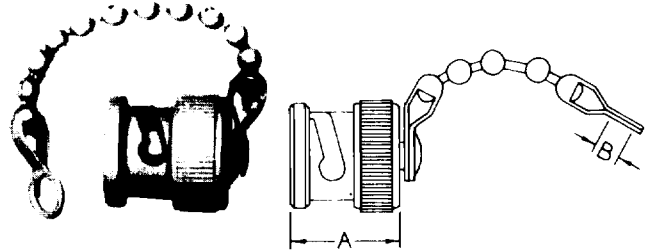


| S/C Part No. | Mtl Type | Dimension | | Engr. Data |
|--------------|-----------|-----------|------|----------------------------------|
| | | A | B | |
| 28PC100-1 | CW-155A-U | 19/32 | | No Chain |
| 28PC101-1 | CW-123A-U | 19/32 | .144 | 2-1/2" Bead Chain |
| 28PC102-1 | CW-159-U | 19/32 | .144 | Shorting Plug, 2-1/2" Bead Chain |
| 28PC104-3 | | 11/16 | | Shorting Plug - No Chain |
| 28PC106-3 | | 19/32 | .144 | 2-1/2" Plastic Chain |
| 28PC108-1 | | 19/32 | .144 | Shorting Plug, 3" Plastic Chain |
| 28PC110-1 | | 19/32 | .473 | 2-1/2" Bead Chain |
| 28PC110-2 | | 19/32 | .505 | 2-1/2" Bead Chain |

BNC SERIES



**SPECIALTY
CONNECTOR CO., INC.**

BNC PLUG TERMINATION

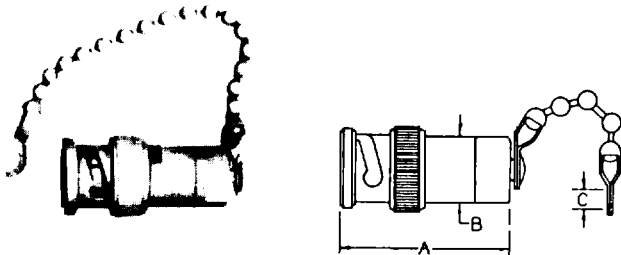


| S/C Part No. | Mil Type | Resistor 5% | | Dimension | | | Engr. Data |
|--------------|----------|-------------|------|-----------|------|------|-----------------------------------|
| | | Ohm | Watt | A | B | C | |
| 28PO100-1 | MX-554/U | 100 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-2 | | 51 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-3 | | 75 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-4 | | 91 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-5 | | 510 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-6 | | 1000 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-7 | | 150 | 1/2 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO100-8 | | 51 | 1 | 1-3/16 | 1/2 | .144 | 3-1/2" Bead Chain |
| 28PO101-1 | | 100 | 1/2 | 1-1/8 | 7/16 | .144 | 3-1/2" Bead Chain |
| 28PO101-2 | | 51 | 1/2 | 1-1/8 | 7/16 | .144 | 3-1/2" Bead Chain |
| 28PO101-3 | | 75 | 1/2 | 1-1/8 | 7/16 | .144 | 3-1/2" Bead Chain |
| 28PO101-4 | | 91 | 1/2 | 1-1/8 | 7/16 | .144 | 3-1/2" Bead Chain |
| 28PO102-1 | | 51 | 1/2 | 1-1/8 | 7/16 | | No Chain |
| 28PO102-4 | | 100 | 1/2 | 1-1/8 | 7/16 | | No Chain |
| 28PO103-1 | | 50 | 1 | 1-3/16 | 9/16 | | Precision Termination No Chain |
| 28PO107-1 | | 51 | 2 | 1-33/64 | 9/16 | .144 | 3-1/2" Chain |

BNC PLUG RECEPTACLE — SINGLE HOLE MOUNT




| S/C Part No. | Dimension | | Mtg. Hole | Engr. Data |
|--------------|-----------|-------|-----------|---|
| | A | B | | |
| 28PR107-1 | 1-1/4 | 19/32 | D8 | Screws into 3/8-32 Tapped Hole Isolated Ground |
| 28PR102-2 | 1-1/4 | 37/64 | | |
| 28PR123-1 | 1-1/4 | 9/16 | D4 | |

BNC ADAPTER — STRAIGHT

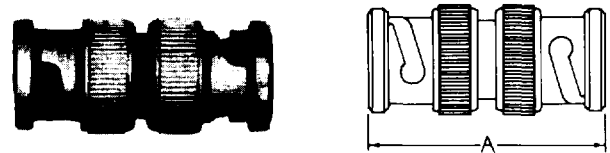


| S/C Part No. | UG-U No. | Adapter Ends | Dimension | Engr. Data |
|--------------|-----------|--------------|-----------|------------|
| | | | A | |
| 28A101-1 | UG-491B/U | Plug-Plug | 1-15/64 | Improved |

BNC PLUG RECEPTACLE — FLANGE MOUNT

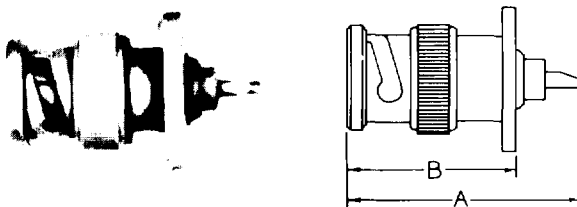

| S/C Part No. | UG-U No. | Mtg. Plate | Dimension | | Engr. Data |
|--------------|------------|------------|-----------|--------|-----------------------------|
| | | | A | B | |
| 28PR100-1 | UG-1104A/U | 2C | 1-3/16 | 55/64 | Improved .062 ID Solder Pot |
| 28PR103-2 | | 2B | 1-3/16 | 27/32 | .062 ID Solder Pot |
| 28PR105-1 | | 1A | 1-3/16 | 27/32 | Improved .062 ID Solder Pot |
| 28PR113-1 | | | | 1-1/32 | 27/32 |

BNC ADAPTER — RIGHT ANGLE

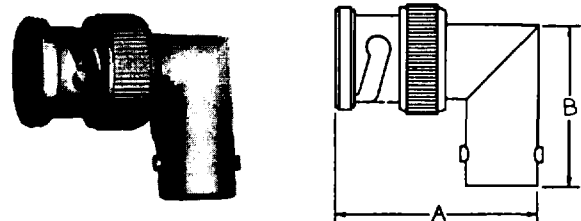


| S/C Part No. | UG-U No. | Adapter Ends | Dimension | | Engr. Data |
|--------------|-----------|--------------|-----------|-------|------------|
| | | | A | B | |
| 28AR100-1 | UG-306B/U | Plug-Jack | 1-1/32 | 51/64 | Improved |
| 28AR101-1 | UG-306/U | Plug-Jack | 1 | 29/32 | Unimproved |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC JACK — STRAIGHT — SHORT CRIMP

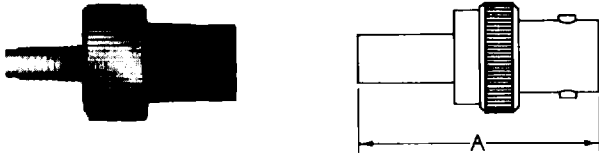


| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | | Engr. Data | Assy. Inst. |
|--------------|------------|------------|-----------|---|---|-----------------------|-------------|
| | | | A | B | C | | |
| 28J107-1 | 58,141 | .213 HEX | 1-15/64 | | | | AI-26 |
| 28J107-2 | 59,62,140 | .255 HEX | 1-15/64 | | | | AI-26 |
| 28J107-3 | 55,142,223 | .213 HEX | 1-15/64 | | | | AI-26 |
| 28J129-1 | 174 | .178 HEX | 1-15/64 | | | | |
| 28J163-2 | 223 | .213 HEX | 1-3/16 | | | Crimp Captive Contact | |
| 28J163-5 | 59,210 | .255 HEX | 1-3/16 | | | Crimp Captive Contact | |
| 28J163-6 | 58 | .213 HEX | 1-3/16 | | | Crimp Captive Contact | |
| 28J164-1 | 8,213 | .429 HEX | 1-17/32 | | | Crimp Captive Contact | |
| 28J164-2 | 9,214 | .429 HEX | 1-17/32 | | | Crimp Captive Contact | |

BNC JACK — STRAIGHT — SINGLE HOLE MOUNT — LONG CRIMP

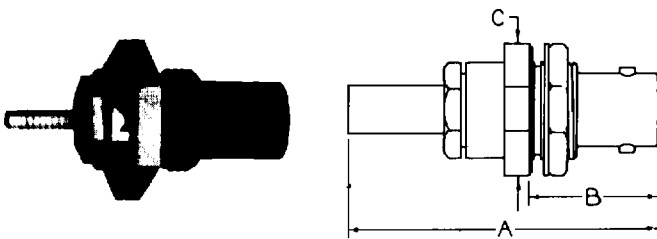


| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | | Mfg. Hole | Engr. Data | Assy. Inst. |
|--------------|------------------|------------|-----------|-------|-------|-----------|---------------------------------|-------------|
| | | | A | B | C | | | |
| 28JS105-1 | 58 | .213 HEX | 1-25/32 | 3/4 | 5/8 | D4 | Isolated Ground Captive Contact | AI-37 |
| 28JS105-2 | 59 | .255 HEX | 1-25/32 | 3/4 | 5/8 | D4 | Isolated Ground Captive Contact | AI-37 |
| 28JS106-1 | Amphenol 621-111 | .429 HEX | 1-19/32 | 43/64 | 11/16 | D4 | Captive Contact | |
| 28JS106-2 | 8,213 | .429 HEX | 1-19/32 | 43/64 | 11/16 | D4 | Captive Contact | |
| 28JS122-1 | 58,141 | .213 HEX | 1-1/2 | 43/64 | 11/16 | D4 | Isolated Ground Captive Contact | AI-37 |
| 28JS122-2 | 59,62,140 | .255 HEX | 1-1/2 | 43/64 | 11/16 | D4 | Captive Contact | AI-37 |
| 28JS122-3 | 188,316 | .128 HEX | 1-1/2 | 43/64 | 11/16 | D4 | Captive Contact | AI-37 |
| 28JS122-8 | 178,196 | .105 HEX | 1-1/2 | 43/64 | 11/16 | D4 | Captive Contact | AI-37 |
| 28JS152-1 | 187,188 | .178 HEX | 1-25/32 | 25/32 | 5/8 | D4 | Isolated Ground Captive Contact | AI-37 |

BNC JACK — STRAIGHT — SINGLE HOLE MOUNT — SHORT CRIMP

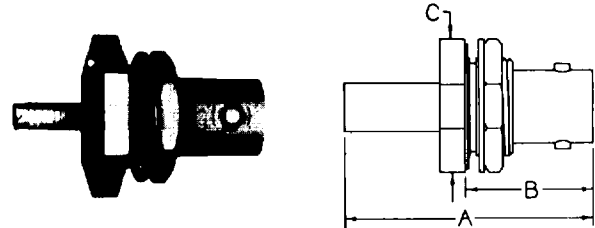


| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | | Mfg. Hole | Engr. Data | Assy. Inst. |
|--------------|-------------|------------|-----------|-------|-------|-----------|-----------------------|-------------|
| | | | A | B | C | | | |
| 28JS126-1 | 58,141 | .213 HEX | 1-5/16 | 43/64 | 11/16 | D4 | | AI-26 |
| 28JS126-2 | 59,62,140 | .255 HEX | 1-5/16 | 43/64 | 11/16 | D4 | | AI-26 |
| 28JS126-3 | 55,223 | .213 HEX | 1-5/16 | 43/64 | 11/16 | D4 | | AI-26 |
| 28JS126-6 | 122,180,195 | .178 HEX | 1-5/16 | 43/64 | 11/16 | D4 | | AI-26 |
| 28JS198-1 | 58 | .213 HEX | 1-3/18 | 13/16 | 11/16 | D4 | Crimp Captive Contact | |
| 28JS198-2 | 59 | .255 HEX | 1-3/8 | 13/16 | 11/16 | D4 | Crimp Captive Contact | |
| 28JS198-3 | 180,195 | .178 HEX | 1-3/8 | 13/16 | 11/16 | D4 | Crimp Captive Contact | |
| 28JS204-1 | 174,316 | .178 HEX | 1-3/8 | 3/4 | 11/16 | D4 | Crimp Captive Contact | |

BNC JACK — STRAIGHT — SINGLE HOLE MOUNT

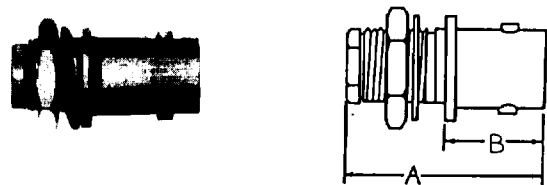

| S/C Part No. | Cable RG-U | Dimension | | Mfg. Hole | Engr. Data | Assy. Inst. |
|--------------|------------|-----------|------|-----------|--------------------------------|-------------|
| | | A | B | | | |
| 28JS155-1 | .085 DIA. | 29/32 | 9/16 | D8 | Solder Bushing Plug in Contact | AI-65 |
| 28JS155-2 | .141 DIA. | 29/32 | 9/16 | D8 | Solder Bushing Plug in Contact | AI-65 |

BNC JACK — RIGHT ANGLE

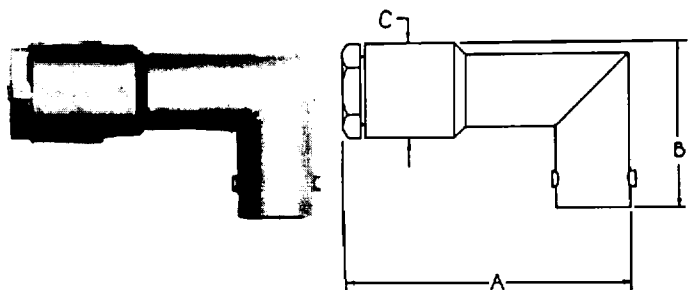


| S/C Part No. | Cable RG-U | Dimension | | | Engr. Data | Assy. Inst. |
|--------------|------------|-----------|-------|-----|--------------------|-------------|
| | | A | B | C | | |
| 28J128-1 | 58 | 1-21/32 | 55/64 | 1/2 | Straight Cut Style | AI-12 |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC JACK — STRAIGHT — SINGLE HOLE MOUNT




| S/C Part No. | UG-U No. | Cable RG-U | Dimension | | | Mfg. Hole | Engr. Data | Asst. Inst. |
|--------------|-----------|---------------------|-----------|-------|-------|-----------|-------------------------------|-------------|
| | | | A | B | C | | | |
| 28JS104-1 | | 58 | 1-7/16 | 3/4 | 5/8 | D4 | Straight Cut Isolated Ground | AI-12 |
| 28JS104-2 | | 59,62 | 1-7/16 | 3/4 | 5/8 | D4 | Straight Cut Isolated Ground | AI-12 |
| 28JS104-3 | | 174, 187, 188 | 1-7/16 | 3/4 | 5/8 | D4 | Straight Cut Isolated Ground | AI-12 |
| 28JS117-1 | UG-909B/U | 55,58,141, 142,223 | 1-1/8 | 13/16 | 11/16 | D4 | Improved | AI-14 |
| 28JS119-1 | UG-910A/U | 59,62,71 | 1-1/8 | 13/16 | 11/16 | D4 | Improved | AI-14 |
| 28JS119-3 | UG-910/U | | | | | | | |
| 28JS120-1 | | 58 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-2 | | 59 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-3 | | 174,188 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-4 | | 223 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-9 | | 302 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-12 | | 178,196 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS120-15 | | 303 | 1-1/8 | 13/16 | 11/16 | D4 | Improved Straight Cut | AI-12 |
| 28JS121-1 | UG-909-U | 55,58,141, 142,223 | 1-1/8 | 43/64 | 11/16 | D4 | Improved W/O Washer | AI-14 |
| 28JS123-1 | | 58 | 1-1/16 | 33/64 | 5/8 | D10 | Unimproved Reverse Mount | |
| 28JS125-1 | | 187,188 | 1-1/16 | 27/32 | 5/8 | D11 | Unimproved | |
| 28JS125-2 | | 58 | 1-1/16 | 27/32 | 5/8 | D11 | Unimproved | |
| 28JS127-1 | | 174, 179A, 187, 188 | 1-1/8 | 13/16 | 11/16 | D4 | Improved W/O Washer | AI-14 |
| 28JS127-2 | | 180,195 | 1-1/8 | 13/16 | 11/16 | D4 | Improved W/O Washer | AI-14 |
| 28JS127-3 | | 179 | 1-1/8 | 13/16 | 11/16 | D4 | Improved W/O Washer | AI-14 |
| 28JS127-6 | | 178,196 | 1-1/8 | 13/16 | 11/16 | D4 | Improved | AI-14 |
| 28JS128-1 | UG-909A/U | 55,58,141, 142,223 | 1-1/8 | 13/16 | 11/16 | D4 | Improved | AI-14 |
| 28JS129-1 | | 55,58 | 1-15/32 | 3/4 | 5/8 | D4 | Isolated Ground | AI-14 |
| 28JS129-2 | | 59,62 | 1-15/32 | 3/4 | 5/8 | D4 | Isolated Ground | AI-14 |
| 28JS129-3 | | 174,187,188 | 1-15/32 | 3/4 | 5/8 | D4 | Isolated Ground | AI-14 |
| 28JS129-4 | | 180,195 | 1-15/32 | 3/4 | 5/8 | D4 | Isolated Ground | AI-14 |
| 28JS138-1 | | 179 | 1-13/32 | 15/32 | 5/8 | D4 | Isolated Ground Reverse Mount | |
| 28JS154-1 | | .141 OD SR | 1-1/8 | 13/16 | 11/16 | D4 | Plug-in Style | AI-21 |
| 28JS154-2 | | .085 OD SR | 1-1/8 | 13/16 | 11/16 | D4 | Plug-in Style | AI-21 |
| 28JS154-3 | | .250 OD SR | 1-1/8 | 13/16 | 11/16 | D4 | Plug-in Style | AI-21 |
| 28JS179-1 | | .141 S.R. | 1-1/8 | 43/64 | 11/64 | D4 | Solder on Bushing | |
| 28JS185-2 | | 58,223 | 1-1/8 | 13/16 | 11/16 | D4 | M39012/19-0101 | |
| 28JS185-3 | | 59,210 | 1-1/8 | 13/16 | 11/16 | D4 | M39012/19-0102 | |
| 28JS185-4 | | 122 | 1-1/8 | 13/16 | 11/16 | D4 | M39012/19-0110 | |
| 28JS185-5 | | 303 | 1-1/8 | 13/16 | 11/16 | D4 | M39012/19-0111 | |
| 28JS185-6 | | 302 | 1-1/8 | 13/16 | 11/16 | D4 | M39012/19-0118 | |
| 28JS191-3 | | 174,316 | 1-1/8 | 13/16 | 11/16 | D4 | Straight Cut Braid Clamp | |

BNC JACK — STRAIGHT



| S/C Part No. | UG-U No. | Cable RG-U | Dimension | | Engr. Data | Asst. Inst. |
|--------------|-----------|--------------------|-----------|------|--------------------|-------------|
| | | | A | B | | |
| 28J110-1 | UG-89C/U | 55,58,141, 142,223 | 1-1/8 | 1/2 | Improved | AI-14 |
| 28J110-4 | | 174,316 | 1-1/8 | 1/2 | Improved | AI-14 |
| 28J110-5 | | 178,196 | 1-1/8 | 1/2 | Improved | AI-14 |
| 28J110-6 | | 122,180,195 | 1-1/8 | 1/2 | Improved | AI-14 |
| 28J111-1 | UG-261C/U | 59,62,71 | 1-1/8 | 1/2 | Improved | AI-14 |
| 28J112-1 | | 58 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J112-2 | | 59 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J112-3 | | 223 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J112-4 | | 174,316 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J112-7 | | 180,195 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J112-9 | | 303 | 1-1/8 | 1/2 | Straight Cut Hdwe. | AI-12 |
| 28J114-1 | UG-89-U | 55,58 | 1-1/16 | 7/16 | Unimproved | |
| 28J119-5 | | 8,9,213,214 | 1-1/2 | 3/4 | Improved | AI-87 |
| 28J125-1 | | 55,58 | 1-1/8 | 1/2 | Captive Contact | AI-20 |
| 28J126-1 | UG-261/U | 59,62 | 1-1/16 | 7/16 | Unimproved | |
| 28J150-1 | | 178,196 | 1-1/8 | 1/2 | Straight Cut Hdwe. | |
| 28J151-4 | | 9,214 | 1-7/16 | 3/4 | Straight Cut Hdwe. | AI-81 |
| 28J151-5 | | 8,213 | 1-7/16 | 3/4 | Straight Cut Hdwe. | AI-81 |
| 28J161-1 | | 58,223 | 1-1/8 | 1/2 | M39012/17-0101 | AI-14 |
| 28J161-2 | | 59,210 | 1-1/8 | 1/2 | M39012/17-0102 | AI-14 |
| 28J161-3 | | 122 | 1-1/8 | 1/2 | M39012/17-0103 | AI-14 |
| 28J161-4 | | 303 | 1-1/8 | 1/2 | M39012/17-0111 | AI-14 |
| 28J161-5 | | 302 | 1-1/8 | 1/2 | M39012/17-0118 | AI-14 |

BNC JACK — STRAIGHT — LONG CRIMP




| S/C Part No. | Cable RG-U | Crimp Tool | Dimension | | Engr. Data | Asst. Inst. |
|--------------|-------------|------------|-----------|------|-----------------|-------------|
| | | | A | B | | |
| 28J106-1 | 58,141 | .213 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J106-2 | 59,62,140 | .255 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J106-3 | 55,142,223 | .213 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J106-4 | 71 | .268 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J106-5 | 122,180,195 | .178 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J106-8 | 178,196 | .105 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |
| 28J147-2 | Belden 8212 | .255 HEX | 1-15/32 | 7/16 | Captive Contact | AI-37 |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC JACK — STRAIGHT — FLANGE MOUNT

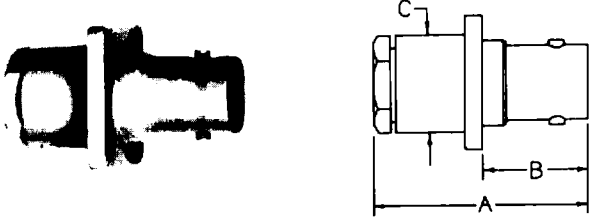


| S/C Part No. | UG-/U No. | Cable RG-/U | Dimension | | | Mfg. Hole | Engr. Data | Assy. Inst. |
|--------------|-----------|----------------------|-----------|-------|------|-----------|-----------------------|-------------|
| | | | A | B | C | | | |
| 28JF103-1 | UG-291C/U | 55,58,141 142,223 | 1-1/8 | 35/64 | 1/2 | 3A | Improved | AI-14 |
| 28JF104-1 | UG-291B/U | 55,58,141 142,223 | 1-1/8 | 35/64 | 1/2 | 3A | Improved W/O Washer | AI-14 |
| 28JF105-1 | UG-262C/U | 59,62,71 | 1-1/8 | 35/64 | 1/2 | 3A | Improved | AI-14 |
| 28JF106-1 | | 58 | 1-1/8 | 35/64 | 1/2 | 3A | Improved Straight Cut | AI-12 |
| 28JF106-2 | | 59 | 1-1/8 | 35/64 | 1/2 | 3A | Improved Straight Cut | AI-12 |
| 28JF106-3 | | 174 | 1-1/8 | 35/64 | 1/2 | 3A | Improved Straight Cut | AI-12 |
| 28JF106-4 | | 223 | 1-1/8 | 35/64 | 1/2 | 3A | Improved Straight Cut | AI-12 |
| 28JF107-1 | | 174,179A 187,188 | 1-1/8 | 35/64 | 1/2 | 3A | Improved | AI-14 |
| 28JF108-1 | UG-291/U | 55,58 | 1-1/16 | 5/8 | 7/16 | 3A | Unimproved | |
| 28JF113-1 | | .141 OD SR | 1-1/8 | 35/64 | 1/2 | 3A | Solder on Bushing | |
| 28JF113-2 | | .085 OD SR | 1-1/8 | 35/64 | 1/2 | 3A | Solder on Bushing | |
| 28JF114-1 | | 59,210 | 1-1/8 | 35/64 | 1/2 | 3A | M39012/18-0101 | |
| 28JF114-2 | | 58,223 | 1-1/8 | 35/64 | 1/2 | 3A | M39012/18-0102 | |
| 28JF114-3 | | 122 | 1-1/8 | 35/64 | 1/2 | 3A | M39012/18-0103 | |
| 28JF114-4 | | 303 | 1-1/8 | 35/64 | 1/2 | 3A | M39012/18-0111 | |
| 28JF114-5 | | 302 | 1-1/8 | 35/64 | 1/2 | 3A | M39012/18-0118 | |

BNC JACK RECEPTACLE — RIGHT ANGLE — SINGLE HOLE MOUNT

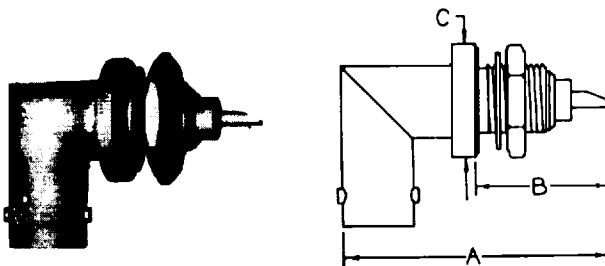


| S/C Part No. | UG-/U No. | Dimension | | | Mfg. Hole | Engr. Data |
|--------------|------------|-----------|-----|-------|-----------|-----------------------------|
| | | A | B | C | | |
| 28JR101-1 | UG-1098A/U | 1-11/32 | 3/4 | 19/32 | D7 | Improved .062 ID Solder Pot |
| 28JR136-1 | UG-1098/U | 1-7/32 | 5/8 | 19/32 | D7 | Improved .062 ID Solder Pot |
| 28JR137-1 | UG-1174/U | 1-7/32 | 5/8 | 19/32 | D6 | Improved .062 ID Solder Pot |

BNC ADAPTER — STRAIGHT — SINGLE HOLE MOUNT

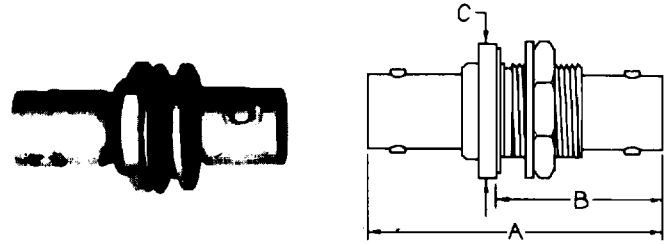


| S/C Part No. | UG-/U No. | Adapter Ends | Dimension | | | Mtg. Hole | Engr. Data |
|--------------|-----------|--------------|-----------|-------|-------|-----------|---------------------|
| | | | A | B | C | | |
| 28AS100-1 | | Jack-Jack | 1-9/32 | 51/64 | 5/8 | D4 | Isolated Ground |
| 28AS101-1 | UG-492D/U | Jack-Jack | 1-17/32 | 55/64 | 11/16 | D4 | Improved Herm. Seal |
| 28AS103-1 | | Jack-Jack | 1-9/32 | 49/64 | 11/16 | D4 | Improved |
| 28AS104-1 | UG-492A/U | Jack-Jack | 1-25/64 | 47/64 | 11/16 | D4 | Improved Herm. Seal |

BNC JACK RECEPTACLE — RIGHT ANGLE — FLANGE MOUNT

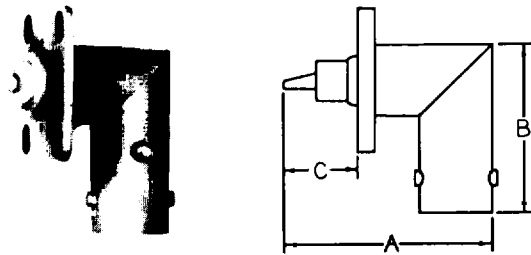

| S/C Part No. | UG-/U No. | Dimension | | | Mtg. Plate | Engr. Data |
|--------------|-----------|-----------|-------|-------|------------|---|
| | | A | B | C | | |
| 28JR104-1 | UG-535/U | 29/32 | 29/32 | 19/64 | 2B | Unimproved Teflon Ins. .059 ID Solder Pot |

BNC TERMINATION — STRAIGHT — SINGLE HOLE MOUNT

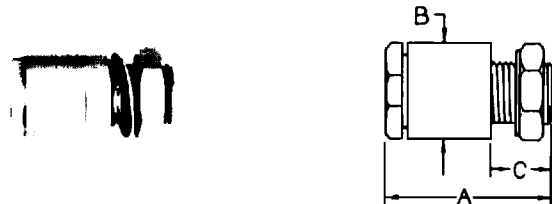


| S/C Part No. | Mil Type | Cable TG-/U | Dimension | | | Mtg. Hole | Engr. Data |
|--------------|------------|-------------|-----------|------|------|-----------|---------------------|
| | | | A | B | C | | |
| 28TS100-1 | MX-1530/U | 59,62,71 | 51/64 | 7/16 | 5/16 | C3 | Unimproved |
| 28TS101-1 | MX-1684/U | 55,58,223 | 51/64 | 7/16 | 5/16 | C3 | Unimproved |
| 28TS102-1 | MX-1684A/U | 55,58,223 | 7/8 | 1/2 | 5/16 | C3 | Improved W/O Washer |
| 28TS105-1 | MX-1530A/U | 59,62,71 | 7/8 | 1/2 | 5/16 | C3 | Improved W/O Washer |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC JACK CAP & CHAIN

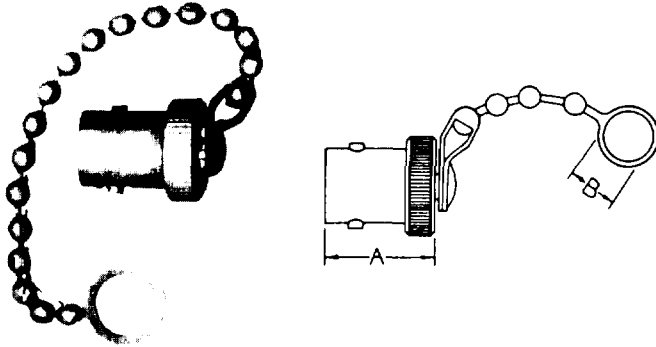


| S/C Part No. | Mil Type | Dimension | | Engr. Data |
|--------------|----------|-----------|------|-----------------------|
| | | A | B | |
| 28JC100-1 | CW-282/U | 37/64 | 9/32 | 3" Bead Chain |
| 28JC100-2 | | 37/64 | .144 | 3" Bead Chain |
| 28JC101-1 | | 21/32 | | Shorting Cap No Chain |

BNC JACK RECEPTACLE — STRAIGHT — SINGLE HOLE MOUNT

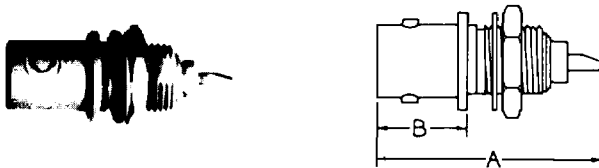


| S/C Part No. | UG-/U No. | Dimension | | Mtg. Hole | Engr. Data |
|--------------|------------|-----------|-------|-----------|--|
| | | A | B | | |
| 28JR102-1 | UG-1094A/U | 1-3/16 | 15/32 | D8 | Improved .062 ID Solder Pot |
| 28JR103-2 | | 1-1/16 | 15/32 | D4 | Improved .062 ID Solder Pot |
| 28JR105-1 | UG-625B/U | 1-1/16 | 31/64 | D6 | Improved .062 ID Solder Pot |
| 28JR106-1 | | 1-1/16 | 31/64 | D4 | Isolated Ground |
| 28JR115-1 | | 1-1/16 | 3/4 | D4 | Isolated Ground, Reverse Mount |
| 28JR117-1 | UG-912A/U | 1-13/64 | 33/64 | D7 | Herm. Seal, Lug Terminal |
| 28JR121-1 | UG-625/U | 1-1/16 | 1/2 | D6 | Rexolite Ins. |
| 28JR124-1 | UG-1094/U | 1-1/16 | 15/32 | D8 | Improved .062 ID Solder Pot |
| 28JR125-1 | UG-1873/U | 1-13/64 | 33/64 | D7 | Herm. Seal, Lug Terminal |
| 28JR126-1 | UG-657/U | 1-19/64 | 19/32 | DD2 | Rexolite Ins. Pressurized |
| 28JR142-1 | UG-912/U | 1-13/64 | 33/64 | D7 | Herm. Seal, Lug Terminal |
| 28JR147-1 | UG-911A/U | 1-13/64 | 53/64 | D4 | Herm. Seal, Lug Terminal Reverse Mount |
| 28JR182-1 | UG-657A/U | 1-19/64 | 19/32 | DD2 | Teflon Ins. |
| 28JR195-1 | UG-604/U | 1-1/32 | 35/64 | DD3 | Rexolite Ins. |
| 28JR205-1 | | 1-1/16 | 15/32 | DD4 | |
| 28JR214-1 | | 1-3/16 | 41/64 | D4 | Isolated Ground, Herm. Sealed |
| 28JR232-1 | UG-625C/U | 1-1/16 | 31/64 | D6 | Improved |
| 28JR281-1 | | 1-3/16 | 15/32 | D8 | M39012/21-0002 |
| 28JR284-1 | | 1-1/16 | 25/32 | D4 | Reverse Mount |
| 28JR333-1 | | 1-1/16 | 31/64 | D5 | M39012/21-0001 |
| 28JR333-2 | | 1-3/16 | 31/64 | D5 | M39012/21-0003 |

BNC JACK RECEPTACLE — PRINTED CIRCUIT BOARD

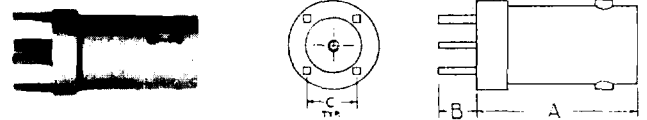

| S/C Part No. | Dimension | | | Engr. Data |
|--------------|-----------|------|------|------------------|
| | A | B | C | |
| 28JR299-3 | 45/64 | .189 | .250 | .040 Square Legs |

BNC JACK RECEPTACLE — PRINTED CIRCUIT BOARD MOUNT

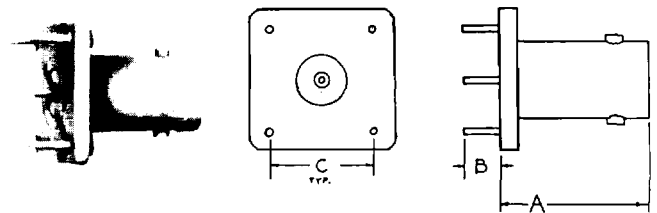

| S/C Part No. | Dimension | | | Engr. Data |
|--------------|-----------|------|------|----------------|
| | A | B | C | |
| 28JR198-1 | 45/64 | .189 | .500 | .038 Dia. Legs |
| 28JR198-2 | 21/32 | .125 | .500 | .038 Dia. Legs |

BNC JACK RECEPTACLE — STRAIGHT — FLANGE MOUNT




| S/C Part No. | UG-/U No. | Dimension | | Mtg. Plate | Engr. Data |
|--------------|-----------|-----------|------|------------|--|
| | | A | B | | |
| 28JR100-1 | UG-290A/U | 1-1/16 | 5/8 | 3A | Improved .062 ID Solder Pot |
| 28JR107-1 | UG-185/U | 1-1/16 | 9/16 | 2B | Unimproved Rexolite Ins. Turret Lug Terminal |
| 28JR109-1 | UG-447/U | 1-1/32 | 5/8 | 3C | Unimproved Rexolite Ins. .043 ID Solder Pot |
| 28JR143-1 | | 1-1/16 | 5/8 | 1A | Improved .062 ID Solder Pot |
| 28JR155-1 | | 1-1/32 | 5/8 | 3B | Unimproved Rexolite Ins. .043 ID Solder Pot |
| 28JR171-1 | UG-290/U | 1-1/32 | 5/8 | 3A | Unimproved Rexolite Ins. .043 ID Solder Pot |
| 28JR227-1 | | 1-1/16 | 5/8 | 3A | M39012-22-0001 |
| 28JR240-1 | | 1-1/32 | 5/8 | 2B | Rexolite Ins. |
| 28JR255-1 | | 1-1/16 | 5/8 | 3B | Improved .062 ID Solder Pot |
| 28JR312-2 | | 1-1/16 | 5/8 | 2B | Improved .062 ID Solder Pot |

BNC SERIES





**SPECIALTY
CONNECTOR CO., INC.**

BNC ADAPTER — FLANGE MOUNT — JACK TO JACK




| S/C Part No. | UG-U No. | Dimension | | Mtg. Plate | Engr. Data |
|--------------|-----------|-----------|-------|------------|------------|
| | | A | B | | |
| 28AF100-1 | UG-414A/U | 1-9/32 | 19/32 | 3A | |

BNC ADAPTER — TEE




| S/C Part No. | UG-U No. | Adapter Ends | Dimension | | Engr. Data |
|--------------|-----------|----------------|-----------|--------|------------|
| | | | A | B | |
| 28AT100-1 | | Jack-Jack-Jack | 1-9/32 | 57/64 | Improved |
| 28AT101-1 | UG-274B/U | Jack-Plug-Jack | 1-9/32 | 1-1/32 | Improved |
| 28AT102-1 | UG-274/U | Jack-Plug-Jack | 1-9/32 | 1-5/64 | Unimproved |
| 28AT105-1 | UG-274A/U | Jack-Plug-Jack | 1-9/32 | 1-1/32 | Improved |
| 28AT106-1 | | Jack-Jack-Plug | 1-31/64 | 57/64 | |
| 28AT116-1 | | Plug-Jack-Plug | 1-13/16 | 63/64 | |
| 28AT117-1 | | Plug-Plug-Plug | 1-13/16 | 1-7/32 | |

BNC ADAPTER — STRAIGHT




| S/C Part No. | UG-U No. | Adapter Ends | Dimension | Engr. Data |
|--------------|----------|--------------|-----------|------------|
| | | | A | |
| 28A100-1 | UG-914/U | Jack-Jack | 1-9/32 | Improved |

BNC PLUG BINDING POST





| S/C Part No. | UG-U No. | Dimension | | Engr. Data |
|--------------|-----------|-----------|--------|---------------------|
| | | A | B | |
| 28PB100-1 | UG-1090/U | 1-9/16 | 1-5/16 | Accepts Banana Plug |

BNC PLUG — DOUBLE BINDING POST




| S/C Part No. | UG-U No. | Dimension | | Engr. Data |
|--------------|----------|-----------|---------|----------------------------|
| | | A | B | |
| 28PB102-2 | | 2-11/64 | 1-63/64 | Accepts Double Banana Plug |

BNC JACK RECEPTACLE RIGHT ANGLE PRINTED CIRCUIT BOARD MOUNT




| S/C Part No. | Dimension | | | Engr. Data |
|--------------|-----------|-----|-------|-----------------|
| | A | B | C | |
| 28JR330-1 | 39/64 | 189 | 51/64 | 040 Square Legs |

BNC SERIES




**SPECIALTY
CONNECTOR CO., INC.**

BNC JACK RECEPTACLE — PCB MOUNT

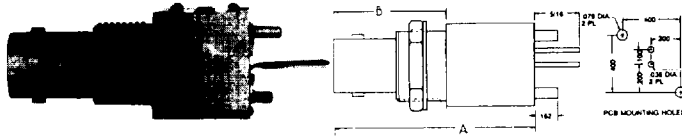


| S/C Part No. | Dimension | | Mtg. Hole | Engr. Data |
|-----------------|-----------|-------|--------------|---------------------|
| | A | B | | |
| 28JR383-1 | 1-3/8 | 13/16 | D4 | Molded Plastic Body |

BNC JACK RECEPTACLE — RIGHT ANGLE — PCB MOUNT

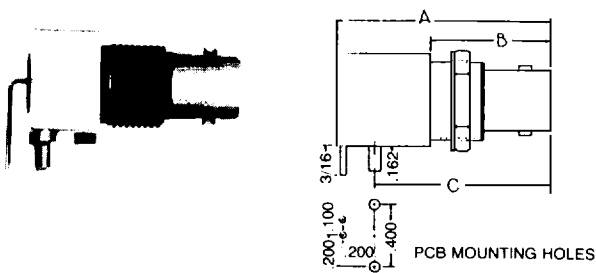

| S/C Part No. | Dimension | | | Mtg. Hole | Engr. Data |
|-----------------|-----------|-------|-------|--------------|---------------------|
| | A | B | C | | |
| 28JR384-1 | 1-3/8 | 13/16 | 1-1/8 | D4 | Molded Plastic Body |

BNC ADAPTER — CROSS

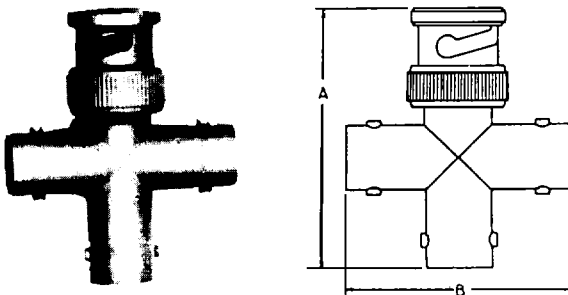

| S/C Part No. | Dimension | | Engr. Data |
|-----------------|-----------|--------|------------|
| | A | B | |
| 28AC100-1 | 1-35/64 | 1-9/32 | |