

OCXO SERIES 8000

■ FEATURES

Small OCXO in 1" SQ. package
Frequencies up to 38.880 MHz
AT and SC-Cut option

■ ELECTRICAL PERFORMANCE


PARAMETER	OCXO SERIES 8000			
	AT CUT CRYSTAL	SC CUT CRYSTAL		
Supply voltage, nom.	5V \pm 5% Standard (3.3V Optional)			
Power dissipation steady state	1.5 Watt Max.			
Heat up power	3 Watt Max			
Heat up time.	3 min Max			
Frequency range	1 To 38.880 MHz Standard			
Frequency Adjustment	\pm 10PPM Min (0 to 5V)	\pm 0.7PPM Min (0 to 5V)		
Freq. stability vs. temperature LX: 0°C to 60°C FZ: -30°C to 70°C D3: -40°C to 85°	\pm 0.05 PPM	\pm 0.01 PPM		
	\pm 0.1 PPM	\pm 0.02 PPM		
	\pm 0.25 PPM	\pm 0.03 PPM		
	(Standard, contact factory for different temp ranges and stabilities)			
Freq. stability vs. supply changes	\pm 0.015 PPM Max for \pm 5% Change	\pm 0.010 PPM Max for \pm 5% Change		
Freq. stability vs. load changes	\pm 0.01 PPM Max for \pm 5% Change	\pm 0.005 PPM Max for \pm 5% Change		
Long term stability (Aging)	\pm 4 PPM Max for 10 Years \pm 0.005 PPM/Day Max.	\pm 1 PPM Max for 10 Years \pm 0.002 PPM/Day Max.		
Output	HCMOS/TTL/Sine 0 to +7dBm (Low voltage CMOS Available)			
Harmonics, Sub Harmonics	-30dBc(Sine Output)			
Spurious	-75dBc(Sine Output)			
Duty cycle	40/60% to 60/40%(HCMOS)			
Rise / fall time	10nS Max. (HCMOS,10%~90%Vout, 90%~10%Vout)			
Short term Stability (10MHz)	1 E-10 /Sec	5 E-11 /Sec		
Phase Noise typical under static condition (Sine Output 10MHZ)	Offset	Phase Noise	Offset	Phase Noise
	10Hz	-90 dBc/Hz	10Hz	-110 dBc/Hz
	100Hz	-125 dBc/Hz	100Hz	-130 dBc/Hz
	1000Hz	-135 dBc/Hz	1000Hz	-140 dBc/Hz
	10000Hz	-150 dBc/Hz	10000Hz	-150 dBc/Hz

Note: All typical parameters for a 10MHz output and 5V supply. For different frequencies consult factory.

■ HOW TO ORDER (PART NUMBER)

Prefix	Output Type	Cut Type	Series	Revision	Temperature Range	Stability	Frequency	Supply Voltage
OX	2:HCMOS 4:LVCMOS 6:SINE	0:AT (No Vcontrol) 1: SC (No Vcontrol) 4: AT (Elect Vcontrol) 5: SC (Elect Vcontrol)	80:8000	A	First letter Lowest Temperature, Second letter Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C steps Example: LZ: +0°C to +70°C LX: +0°C to +60°C FZ: -30°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in PPM Example 28= 0.28PPM 10= 0.1PPM	In MHz	5; 5V 3.3; 3.3V

Example:

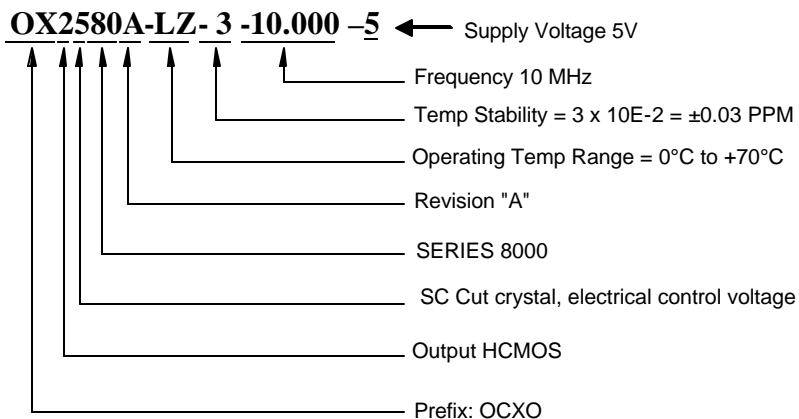

■ MECHANICAL SPECIFICATION

