


GSD

6-1-99Z

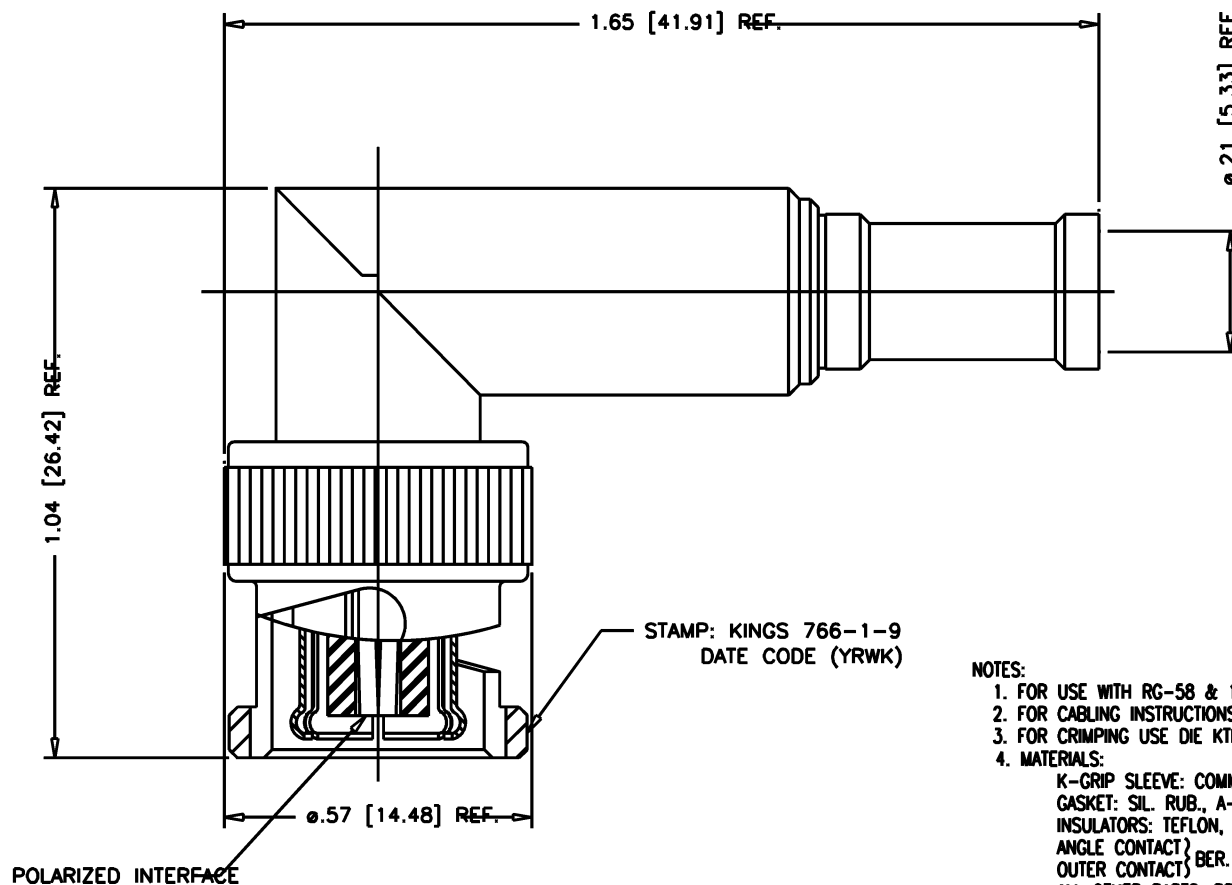

POLARIZED INTERFACE

STAMP: KINGS 766-1-9  
DATE CODE (YRWK)

## NOTES:

1. FOR USE WITH RG-58 & 141/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-401.
3. FOR CRIMPING USE DIE KTH-2061.
4. MATERIALS:
  - K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-135
  - GASKET: SIL. RUB., A-A-59588
  - INSULATORS: TEFLON, ASTM-D-4894
  - ANGLE CONTACT } BER. COPPER, ASTM-B-196
  - OUTER CONTACT }
  - ALL OTHER PARTS: BRASS, ASTM-B16
5. FINISHES:
  - CENTER CONTACTS: HARD GOLD PLATE PER ASTM-B488
  - OUTER CONTACT } SILVER PLATE PER ASTM-B700
  - SPRING CONTACT }
  - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINSH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
  - FREQUENCY RANGE: DC TO 4 GHz.
  - VOLTAGE RATING: 500 VRMS
  - NOMINAL IMPEDANCE: 50 OHMS
7. DIMENSIONS IN INCHES [MM].

## REVISIONS

| ISSUE | CHANGES                             |
|-------|-------------------------------------|
| 2     | CN 39861 A<br>REDRAWN<br>DCT 3/27/7 |

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, ANG, BNC, POL

|           |             |
|-----------|-------------|
| DRAWN DCT | DATE 3/27/7 |
| DESIGN    | DATE        |
| APPR.     | DATE        |

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

766-1-9

GSD