

**SANYO**

No. 5082A

**LC321664BJ, BM, BT-70/80****1 MEG (65536 words × 16 bits) DRAM  
Fast Page Mode, Byte Write**

## Overview

The LC321664BJ, BM, BT is a CMOS dynamic RAM operating on a single 5 V power source and having a 65536 words × 16 bits configuration. Equipped with large capacity capabilities, high speed transfer rates and low power dissipation, this series is suited for a wide variety of applications ranging from computer main memory and expansion memory to commercial equipment.


Address input utilizes a multiplexed address bus which permits it to be enclosed in a compact plastic package of 40-pin SOJ. Refresh rates are within 4 ms with 256 row address (A0 to A7) selection and support Row Address Strobe ( $\overline{\text{RAS}}$ )-only refresh, Column Address Strobe ( $\overline{\text{CAS}}$ )-before- $\overline{\text{RAS}}$  refresh and hidden refresh settings. There are functions such as fast page mode, read-modify-write and byte write.

## Features

- 65536 words × 16 bits configuration.
- Single 5 V ± 10% power supply.
- All input and output (I/O) TTL compatible.
- Supports fast page mode, read-modify-write and byte write.
- Supports output buffer control using early write and Output Enable ( $\overline{\text{OE}}$ ) control.
- 4 ms refresh using 256 refresh cycles.
- Supports  $\overline{\text{RAS}}$ -only refresh,  $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$  refresh and hidden refresh.
- Packages  
SOJ 40-pin (400 mil) plastic package : LC321664BJ  
SOP 40-pin (525 mil) plastic package : LC321664BM  
TSOP 44-pin (400 mil) plastic package : LC321664BT
- $\overline{\text{RAS}}$  access time/column address access time/ $\overline{\text{CAS}}$  access time/cycle time/power dissipation

## Package Dimensions

unit: mm

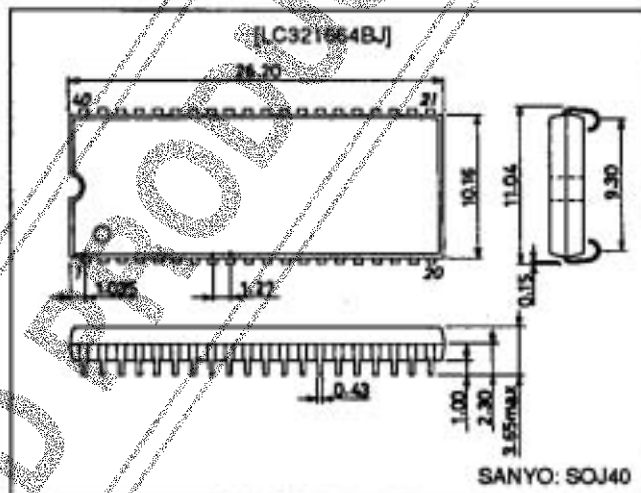**3200-SOJ40**

Parameter	LC321664BJ, BM, BT	
	-70	-80
RAS access time	70 ns	80 ns
Column address access time	40 ns	45 ns
CAS access time	25 ns	25 ns
Cycle time	125 ns	135 ns
Power dissipation (max)	During operation	688 mW
	During standby	5.5 mW (CMOS level)/11 mW (TTL level)


**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

LC321664BJ, BM, BT-70/80


Package Dimensions  
unit: mm

3195-SOP40


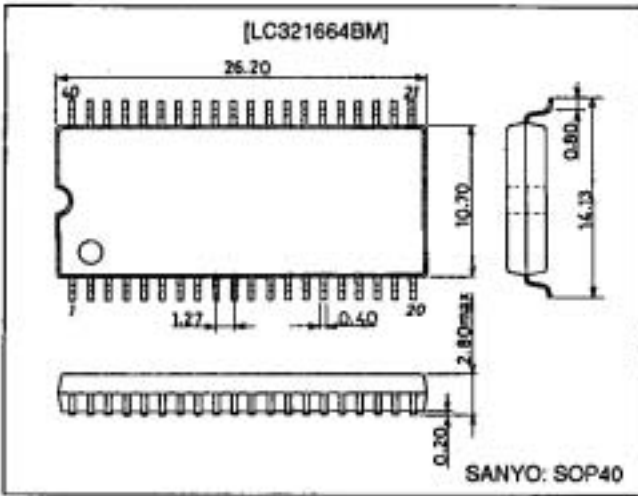


Package Dimensions  
unit: mm


3207-TSOP44

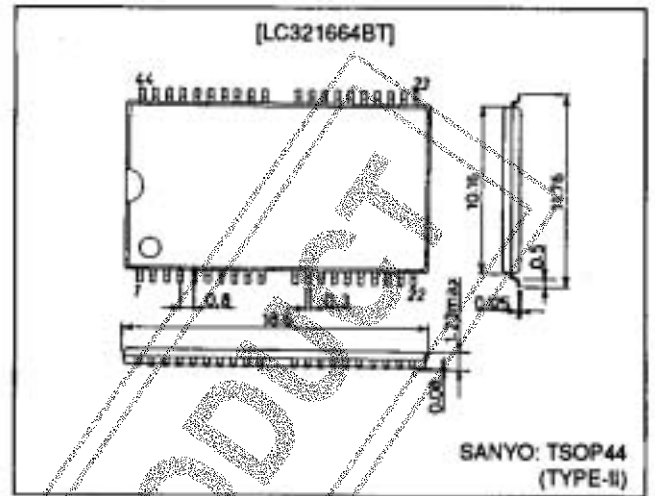

Pin Assignments

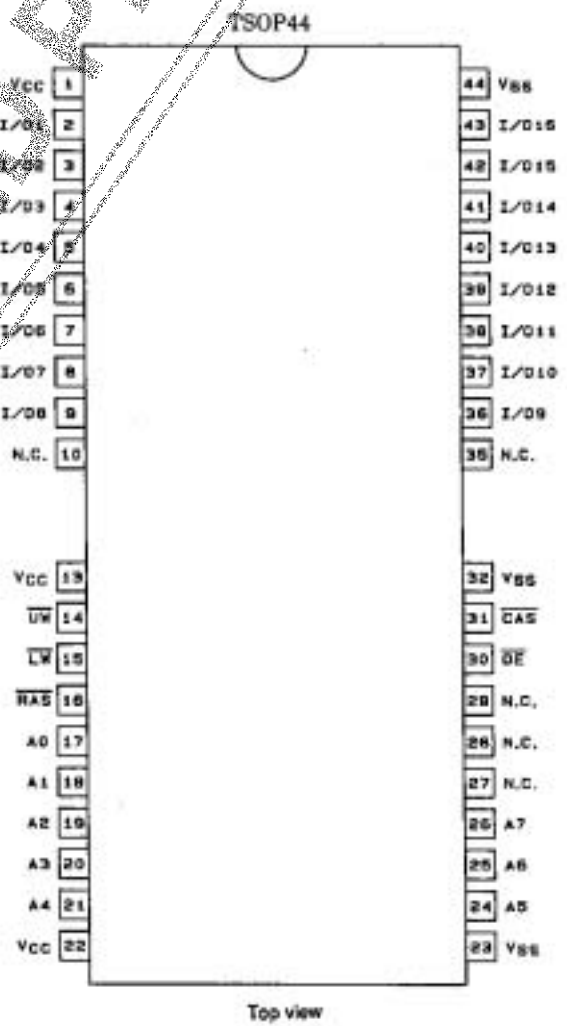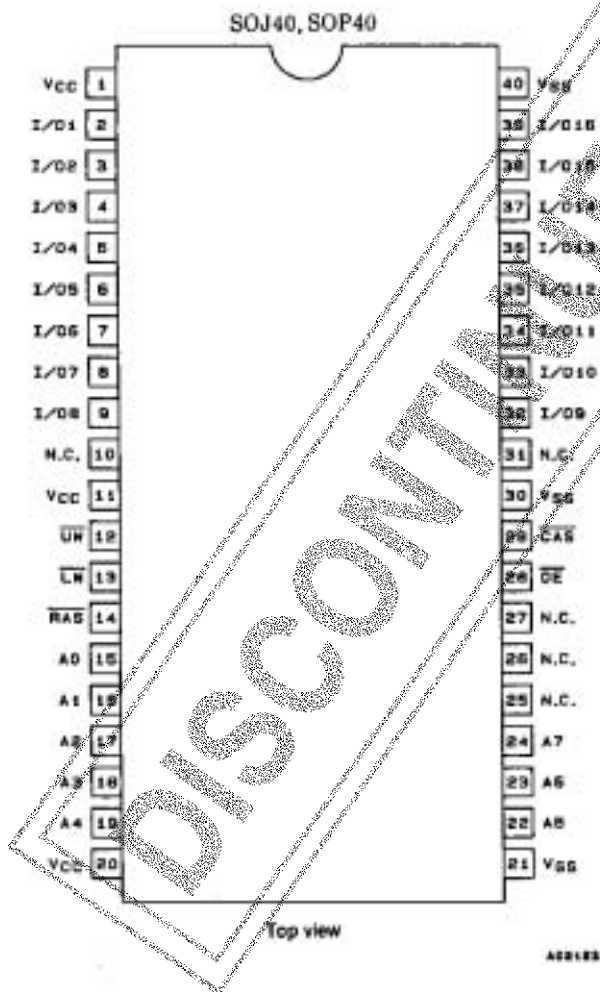

Block Diagram

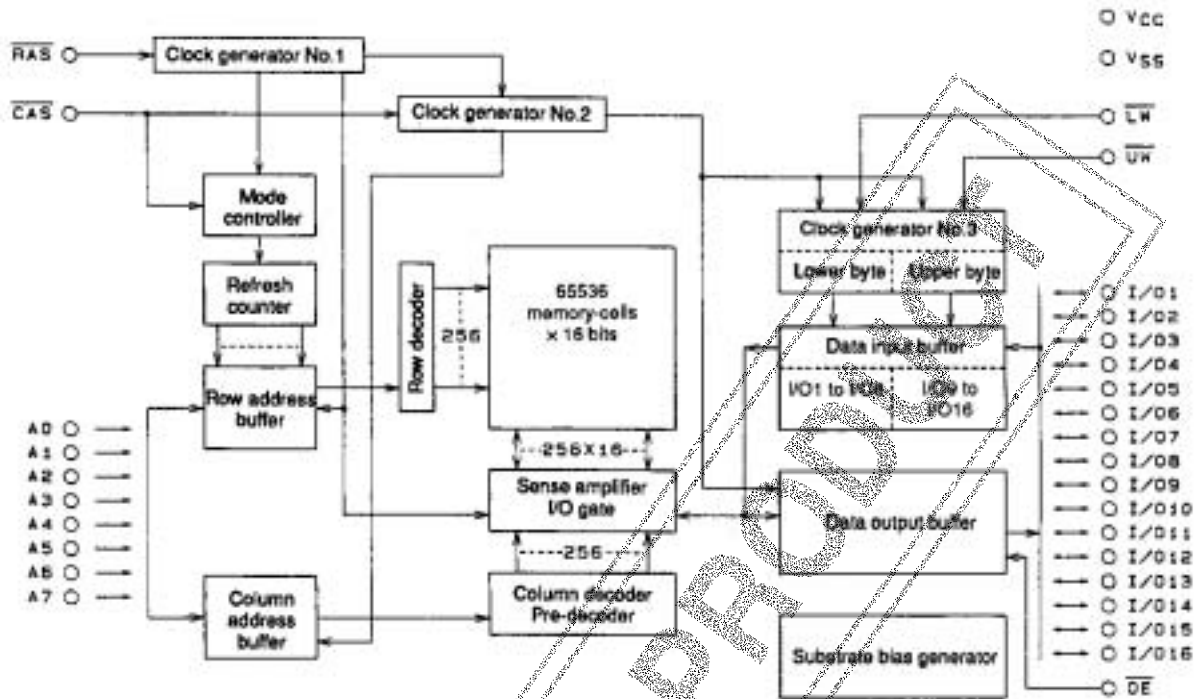

402125

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit	Note	
Maximum supply voltage	$V_{CC \text{ max}}$	-1.0 to +7.0	V	1	
Input voltage	$V_{IH}$	-1.0 to +7.0	V	1	
Output voltage	$V_{OUT}$	-1.0 to +7.0	V	1	
Allowable power dissipation	$P_d \text{ max}$	LC321664BJ, BM	800	mW	1
		LC321664BT	700		
Output short-circuit current	$I_{OUT}$	50	mA	1	
Operating temperature range	$T_{op}$	0 to +70	°C	1	
Storage temperature range	$T_{stg}$	-55 to +150	°C	1	

Note: 1. Stresses greater than the above listed maximum values may result in damage to the device.

DC Recommended Operating Ranges at  $T_a = 0$  to +70°C

Parameter	Symbol	min	typ	max	Unit	Note
Power supply voltage	$V_{CC}$	4.5	5.0	5.5	V	2
Input high level voltage	$V_{IH}$	2.4		6.5	V	2
Input low level voltage (A0 to A7, RAS, CAS, LW, UW, CE)	$V_{IL}$	-1.0*		+0.8	V	2
Input low level voltage (I/O1 to I/O16)	$V_{IL}$	-0.5*		+0.8	V	2

Note: 2. All voltages are referenced to  $V_{SS}$ .

A bypass capacitor of about 0.1  $\mu\text{F}$  should be connected between  $V_{CC}$  and  $V_{SS}$  of the device.

\*: -2.0 V when pulse width is less than 20 ns.

LC321664BJ, BM, BT-70/80

DC Electrical Characteristics at  $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$

Parameter	Symbol	Conditions	LC321664BJ, BM, BT				Unit	Note
			-70		-80			
			min	max	min	max		
Operating current (Average current during operation)	$I_{CC1}$	RAS, CAS, address cycling: $t_{RC} = t_{RC\ min}$		125	115	mA	3, 4, 5	
Standby current	$I_{CC2}$	RAS = CAS = $V_{IH}$		2	2	mA		
RAS-only refresh current	$I_{CC3}$	RAS cycling, CAS = $V_{IH}$ ; $t_{RC} = t_{RC\ min}$		125	115	mA	3, 5	
Fast page mode current	$I_{CC4}$	RAS = $V_{IL}$ , CAS, address cycling; $t_{RC} = t_{RC\ min}$		60	70	mA	3, 4, 5	
Standby current	$I_{CC5}$	RAS = CAS = $V_{CC} - 0.2\text{ V}$		1	1	mA		
CAS-before-RAS refresh current	$I_{CC6}$	RAS, CAS cycling: $t_{RC} = t_{RC\ min}$		125	115	mA	3	
Input leakage current	$I_L$	$0\text{ V} \leq V_{IN} \leq 5.5\text{ V}$ , pins other than test pin = $0\text{ V}$	-10	+10	-10	+10	$\mu\text{A}$	
Output leakage current	$I_{OL}$	$D_{OUT}$ disable, $0\text{ V} \leq V_{OUT} \leq 5.5\text{ V}$	-10	+10	-10	+10	$\mu\text{A}$	
Output high level voltage	$V_{OH}$	$I_{OUT} = -2.5\text{ mA}$	2.4		2.4		V	
Output low level voltage	$V_{OL}$	$I_{OUT} = 2.1\text{ mA}$		0.4		0.4	V	

Note: 3. All current values are measured at minimum cycle rate. Since current flows impermoderately, if cycle time is longer than shown here, current value becomes smaller.

4.  $I_{CC1}$  and  $I_{CC4}$  are dependent on output loads. Maximum values for  $I_{CC1}$  and  $I_{CC4}$  represent values with output open.

5. Address change is less than or equal to one time during RAS =  $V_{IL}$ . Concerning  $I_{CC3}$ , it is less than or equal to one time during 1 cycle ( $t_{RC}$ ).

AC Electrical Characteristics at  $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$  (Notes 6, 7 and 8)

Parameter	Symbol	LC321664BJ, BM, BT				Unit	Note
		70		-80			
		min	max	min	max		
Random read, write cycle time	$t_{RC}$	125		135		ns	
Read-write/read-modify-write cycle time	$t_{RWRC}$	170		180		ns	
Fast page mode cycle time	$t_{RC}$	50		55		ns	
Fast page mode read-write/read-modify-write cycle time	$t_{RWRC}$	95		100		ns	
RAS access time	$t_{RAC}$		70		80	ns	9, 14, 15
CAS access time	$t_{CAC}$		25		25	ns	9, 14
Column address access time	$t_{AA}$		40		45	ns	9, 15
CAS precharge access time	$t_{AP}$		45		50	ns	9
Output low-impedance time from CAS low	$t_{OLZ}$	0		0		ns	9
Output buffer turn-off delay time	$t_{OFF}$	0	20	0	20	ns	10
Rise, fall time	$t_r$	3	50	3	50	ns	
RAS precharge time	$t_{RP}$	45		45		ns	
RAS pulse width	$t_{RAS}$	70	10000	80	10000	ns	
RAS pulse width for fast page mode only	$t_{RASP}$	70	100000	80	100000	ns	
RAS hold time	$t_{RSH}$	25		25		ns	
CAS hold time	$t_{CSH}$	70		80		ns	
CAS pulse width	$t_{CAS}$	25	10000	25	10000	ns	
RAS to CAS delay time	$t_{RCD}$	20	45	20	55	ns	14
RAS to column address delay time	$t_{RAD}$	15	30	15	35	ns	15
CAS to RAS precharge time	$t_{CRP}$	10		10		ns	
CAS precharge time	$t_{CP}$	10		10		ns	
Row address setup time	$t_{ASR}$	0		0		ns	
Row address hold time	$t_{AAH}$	10		10		ns	
Column address setup time	$t_{ASC}$	0		0		ns	
Column address hold time	$t_{CAH}$	15		15		ns	
Column address hold time referenced to RAS	$t_{AH}$	50		55		ns	
Column address to RAS lead time	$t_{RAL}$	35		40		ns	
Read command setup time	$t_{RCS}$	0		0		ns	
Read command hold time referenced to CAS	$t_{RCH}$	0		0		ns	11
Read command hold time referenced to RAS	$t_{RRH}$	0		0		ns	11
Write command hold time	$t_{WCH}$	15		15		ns	
Write command hold time referenced to RAS	$t_{WCR}$	50		55		ns	

Continued on next page.

LC321664BJ, BM, BT-70/80

Continued from preceding page.

Parameter	Symbol	LC321664BJ, BM, BT				Unit	Note
		-70		-80			
		min	max	min	max		
Write command pulse width	$t_{WP}$	15		15		ns	
Write command to RAS lead time	$t_{RWL}$	20		20		ns	
Write command to CAS lead time	$t_{CWL}$	20		20		ns	
Data input setup time	$t_{DS}$	0		0		ns	12
Data input hold time	$t_{DH}$	15		15		ns	12
Data input hold time referenced to RAS	$t_{DHR}$	50		55		ns	
Refresh time	$t_{REF}$		4		4	ms	
Write command setup time	$t_{WCS}$	0		0		ns	13
CAS to $\overline{UW}$ , $\overline{LW}$ delay time	$t_{CWD}$	45		45		ns	13
RAS to $\overline{UW}$ , $\overline{LW}$ delay time	$t_{RWD}$	90		100		ns	13
Column address to $\overline{UW}$ , $\overline{LW}$ delay time	$t_{AWD}$	60		65		ns	13
CAS precharge $\overline{UW}$ , $\overline{LW}$ delay time for fast page mode cycle only	$t_{CPWD}$	65		70		ns	13
CAS setup time for CAS-before-RAS	$t_{CSR}$	10		10		ns	
CAS hold time for CAS-before-RAS	$t_{CHR}$	10		10		ns	
RAS precharge CAS active time	$t_{RPC}$	10		10		ns	
CAS precharge time for CAS-before-RAS counter test	$t_{CPT}$	40		40		ns	
RAS hold time referenced to $\overline{OE}$	$t_{ROH}$	15		15		ns	
$\overline{OE}$ access time	$t_{OEA}$		25		25	ns	9
$\overline{OE}$ delay time	$t_{OED}$	15		15		ns	
$\overline{OE}$ output buffer turn-off delay time	$t_{OET}$	0	15	0	15	ns	10
$\overline{OE}$ command hold time	$t_{OEH}$	20		20		ns	
Data input to CAS delay time	$t_{DZC}$	0		0		ns	16
Data input to $\overline{OE}$ delay time	$t_{DZO}$	0		0		ns	16
Masked write setup time	$t_{MCS}$	0		0		ns	
Masked write hold time referenced to RAS	$t_{MRH}$	0		0		ns	
Masked write hold time referenced to CAS	$t_{MCH}$	0		0		ns	


Input/Output Capacitance at  $T_a = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$

Parameter	Symbol	min	max	Unit	Note
Input capacitance (A0 to A7, RAS, CAS, $\overline{UW}$ , $\overline{LW}$ , $\overline{OE}$ )	$C_{IH}$		7	pF	
Input/Output capacitance (I/O1 to I/O16)	$C_{IO}$		7	pF	

- Note:
- An initial pause of 200  $\mu\text{s}$  is required after power-up followed by eight RAS-only refresh cycles before proper device operation is achieved. In case of using refresh counter, a minimum of eight CAS-before-RAS refresh cycles instead of eight RAS-only refresh cycles are required.
  - Measured at  $t_r = 5\text{ ns}$ .
  - When measuring input signal timing,  $V_{IH}$  (min) and  $V_{IL}$  (max) are used for reference points. In addition, rise and fall time are defined between  $V_{IH}$  and  $V_{IL}$ .
  - Measured using an equivalent of 50 pF and the standard TTL loads.
  - $t_{OFF}$  (max) and  $t_{OZC}$  (max) are defined as the time until output voltage can no longer be measured when output switches to a high impedance condition.
  - Operation is guaranteed if either  $t_{ROH}$  or  $t_{RCH}$  is satisfied.
  - These parameters are measured from the falling edge of CAS for an early-write cycle, and from the falling edge of  $\overline{UW}$  and  $\overline{LW}$  for a read-write/read-modify-write cycle.
  - $t_{WCS}$ ,  $t_{CWD}$ ,  $t_{RWD}$ ,  $t_{AWD}$  and  $t_{CPWD}$  are not restrictive operating parameters for memory in that they specify the operating mode. If  $t_{WCS} \geq t_{WCS}$  (min), the cycle switches to an early-write cycle and output pins switch to high impedance throughout the cycle. If  $t_{CWD} \geq t_{CWD}$  (min),  $t_{RWD} \geq t_{RWD}$  (min),  $t_{AWD} \geq t_{AWD}$  (min) and  $t_{CPWD} \geq t_{CPWD}$  (min) for fast page mode cycle only, the cycle switches to a read-write/read-modify-write cycle and data output equal information in the selected cells. If neither of the above timings are satisfied, output pins are in an undefined state.
  - $t_{RCH}$  (max) is not a restrictive operating parameter but instead represents the point at which the access time  $t_{RAC}$  (max) is guaranteed. If  $t_{RCH} \geq t_{RCH}$  (max), access time is determined according to  $t_{CAC}$ .
  - $t_{RAD}$  (max) is not a restrictive operating parameter but instead represents the point at which the access time  $t_{RAC}$  (max) is guaranteed. If  $t_{RAD} \geq t_{RAD}$  (max), access time is determined according to  $t_{AA}$ .
  - Operation is guaranteed if either  $t_{DZC}$  or  $t_{DZO}$  is satisfied.


Timing Chart

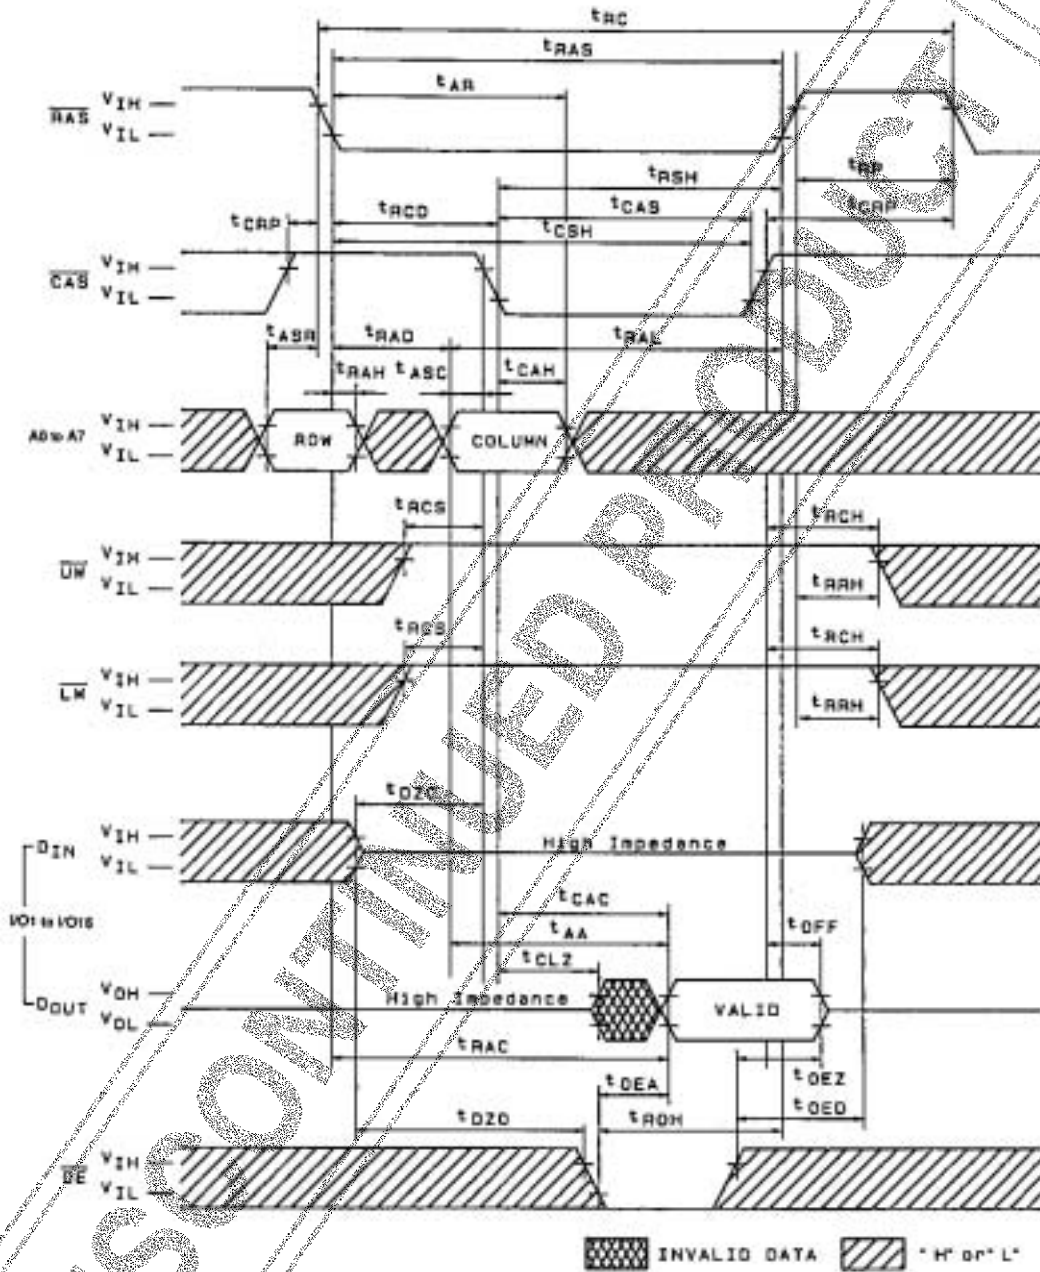

Read Cycle



A02139

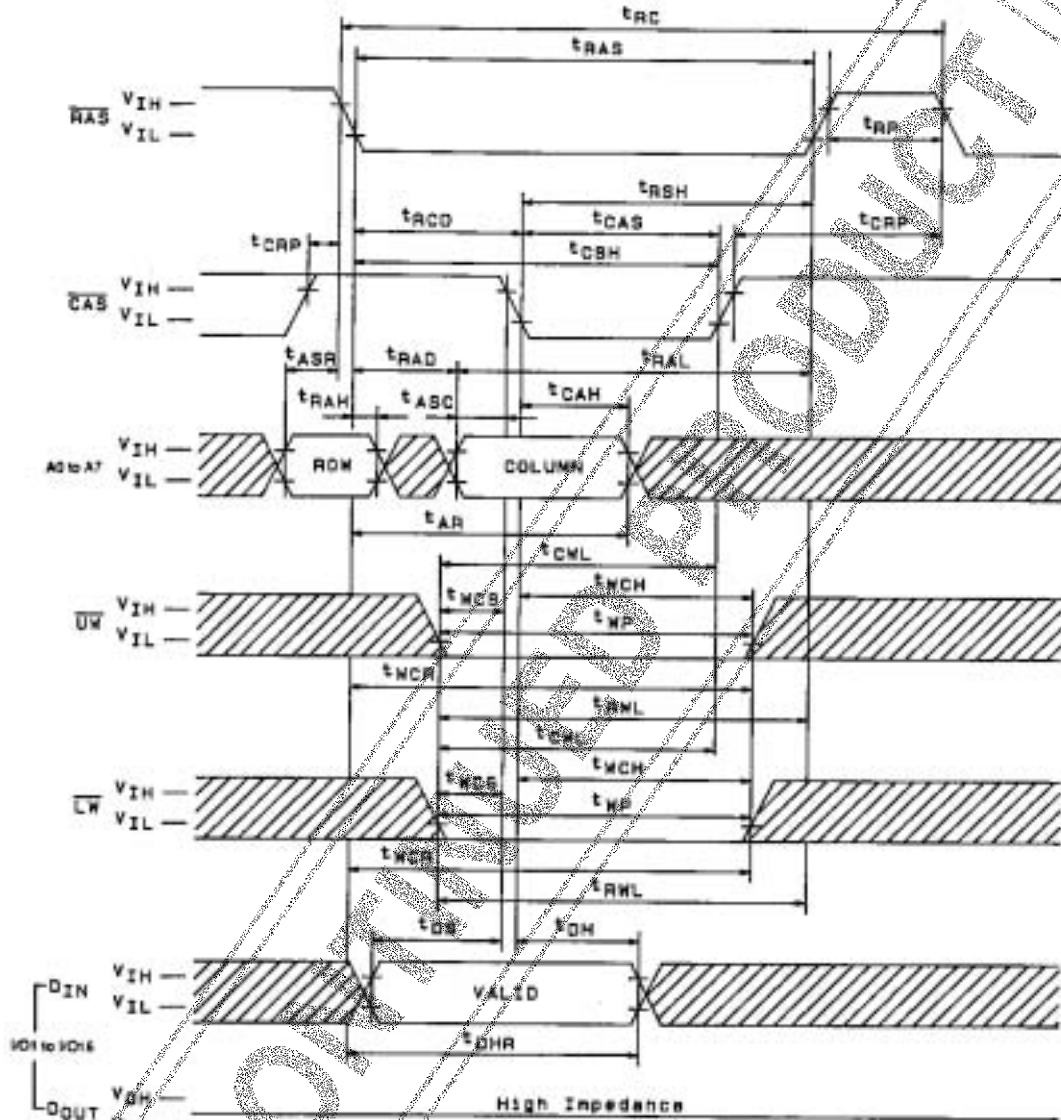Early Write Cycle






 \* H\* or\* L\*  
 \* H\* or\* L\*

ADD140

DISCONTINUED PRODUCT

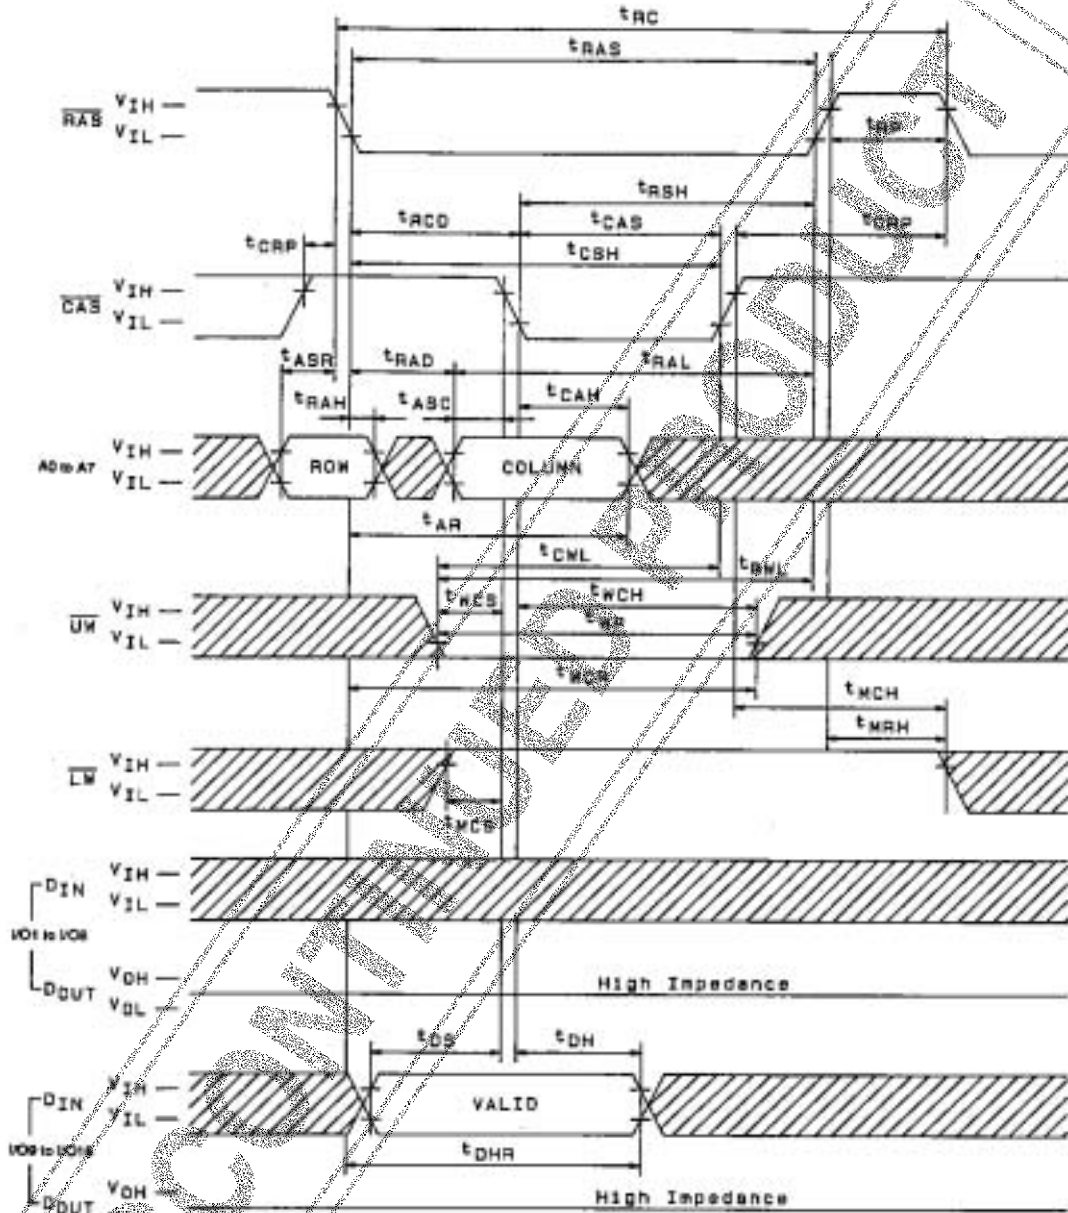Upper Byte Early Write Cycle




 \* H\* or L\*  
 \* H\* or L\*

A02141

DISCONTINUED PRODUCT



Write Cycle ( $\overline{OE}$  Control)

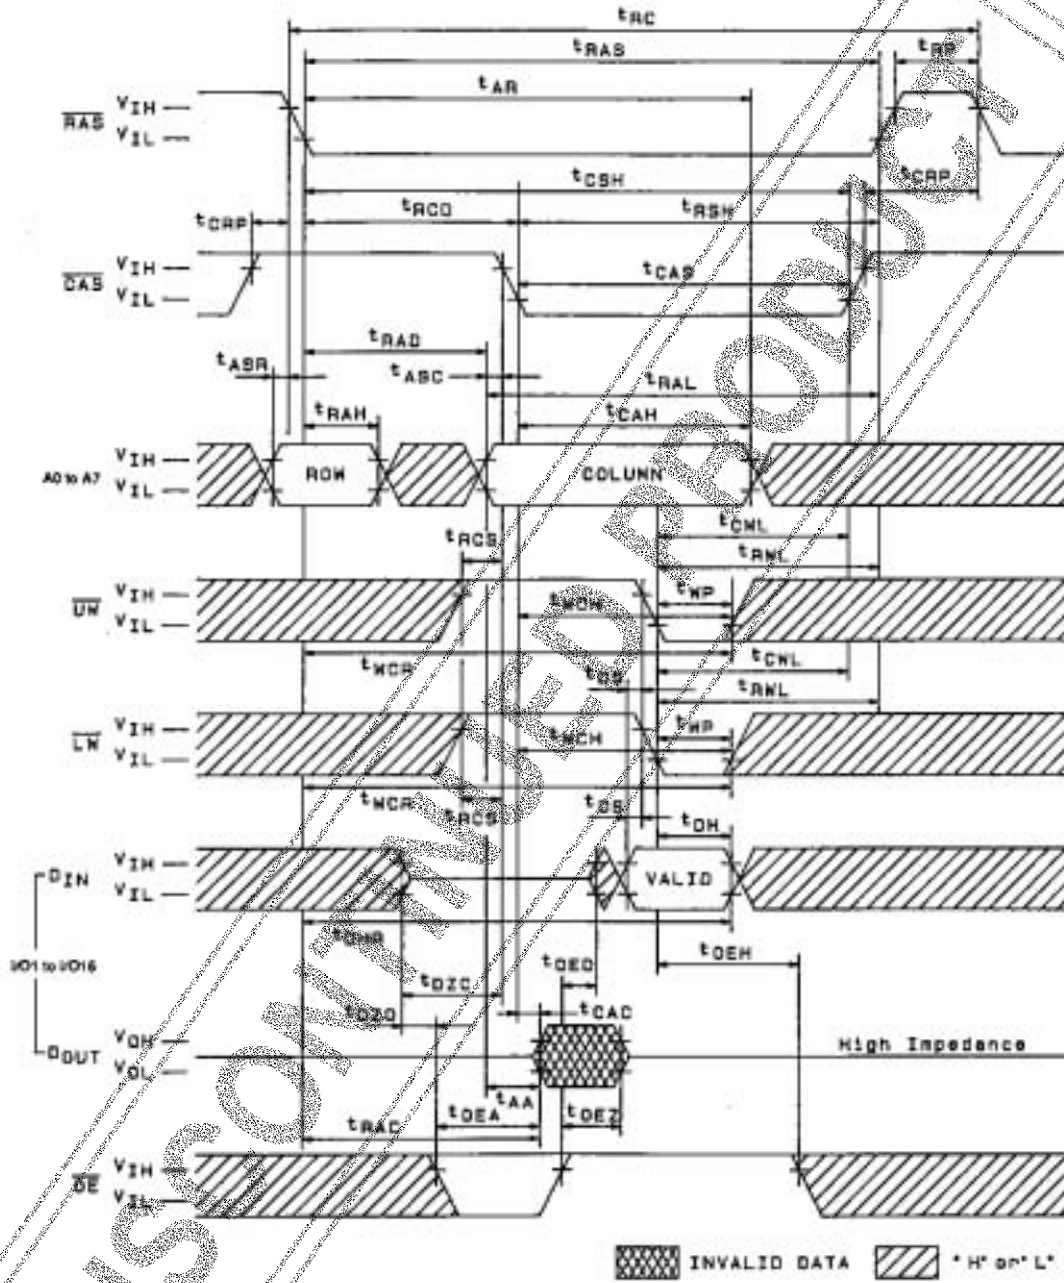


402143






Read-Modify Write Cycle

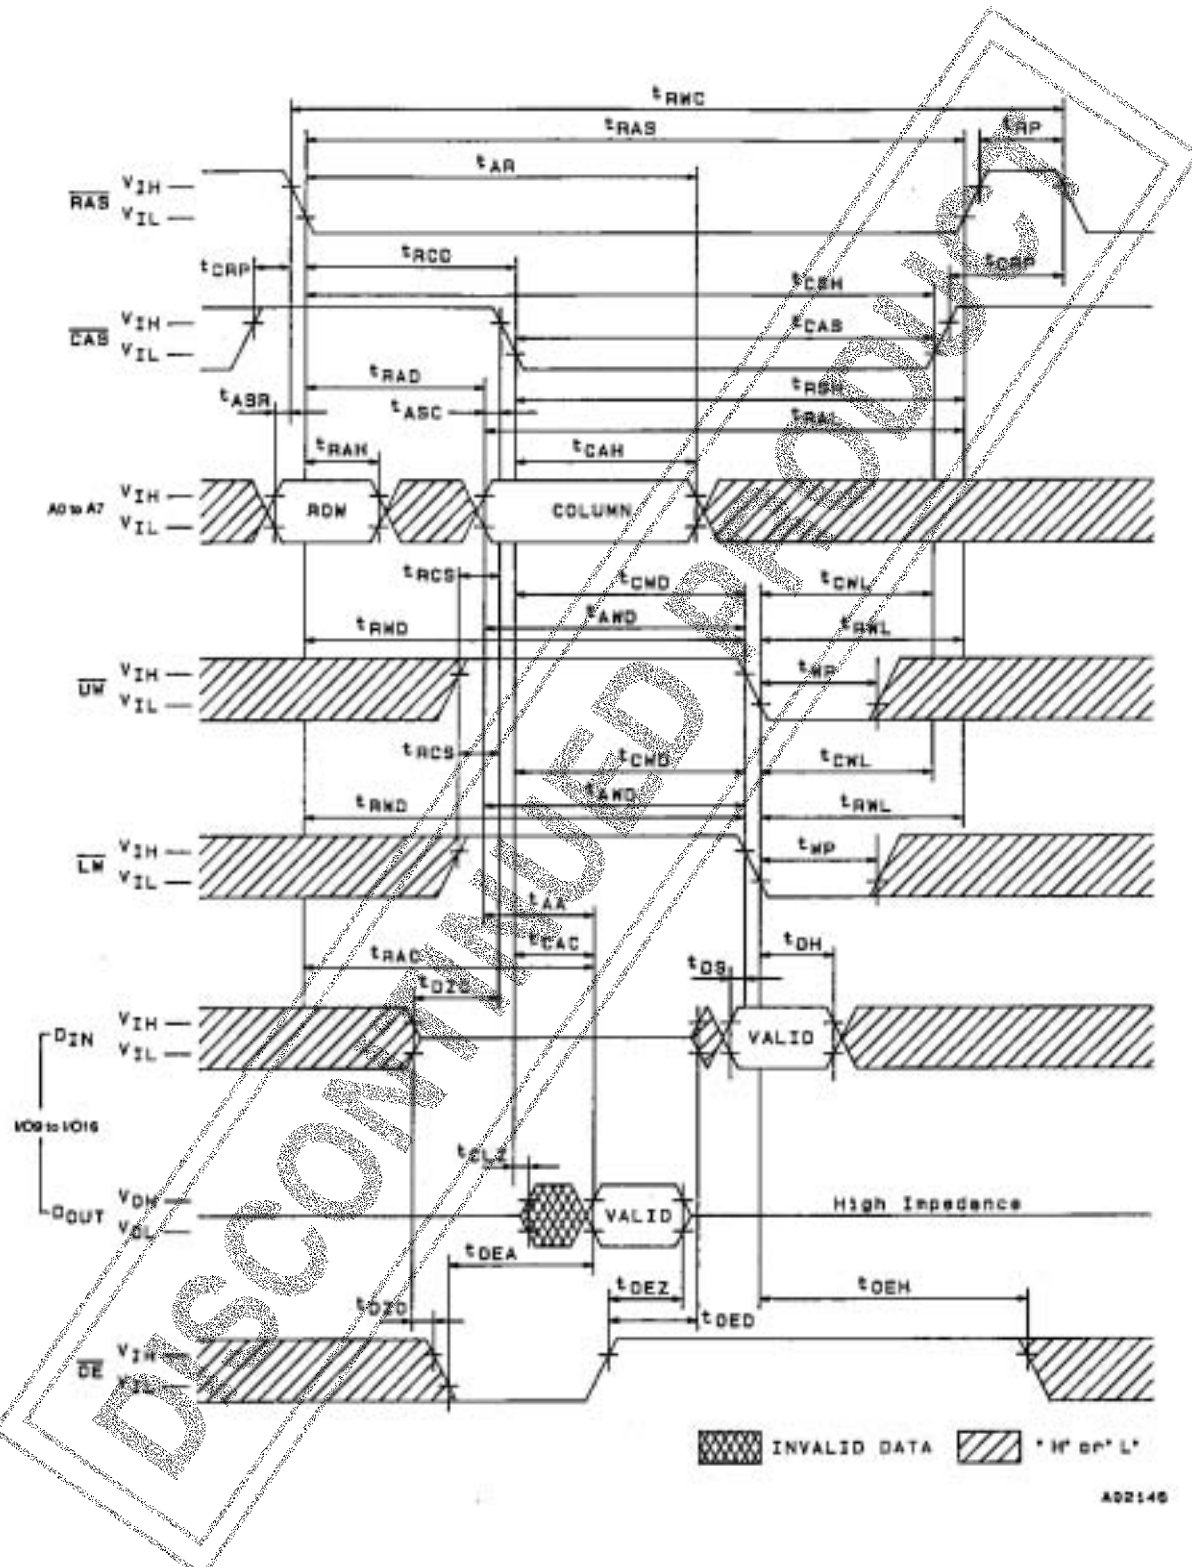

A02146

Read-Modify Upper Byte Write Cycle

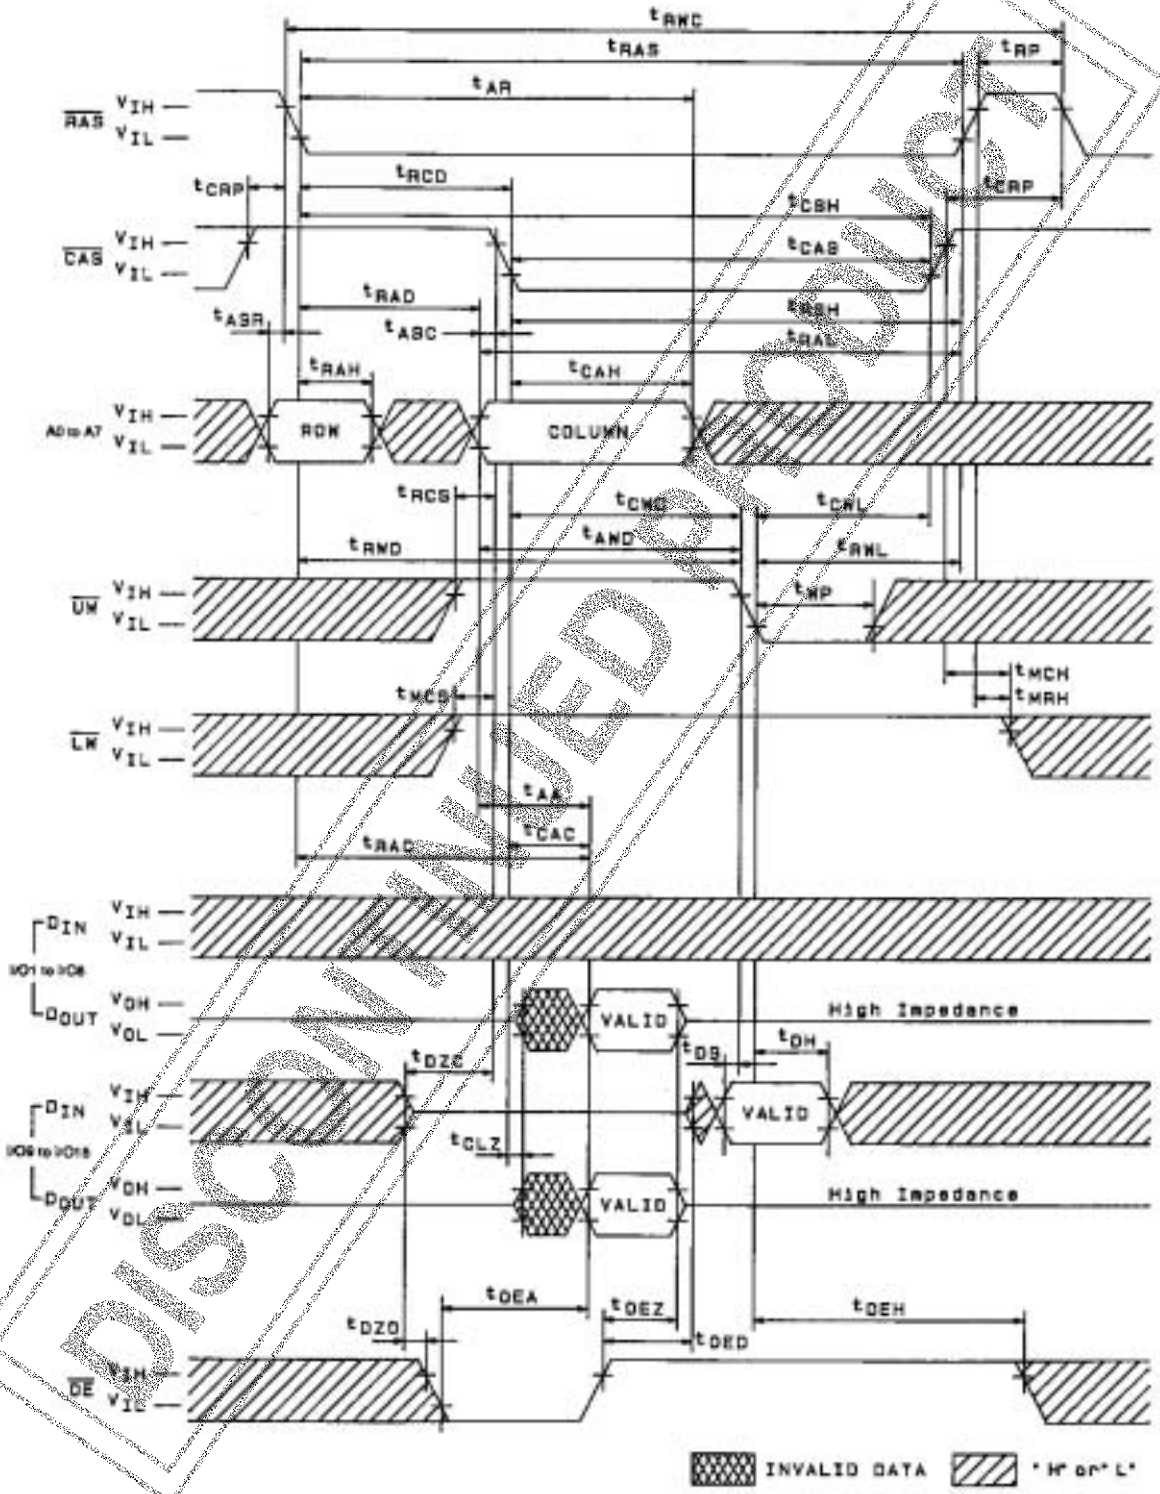


A02147





Fast Page Mode Early Write Cycle

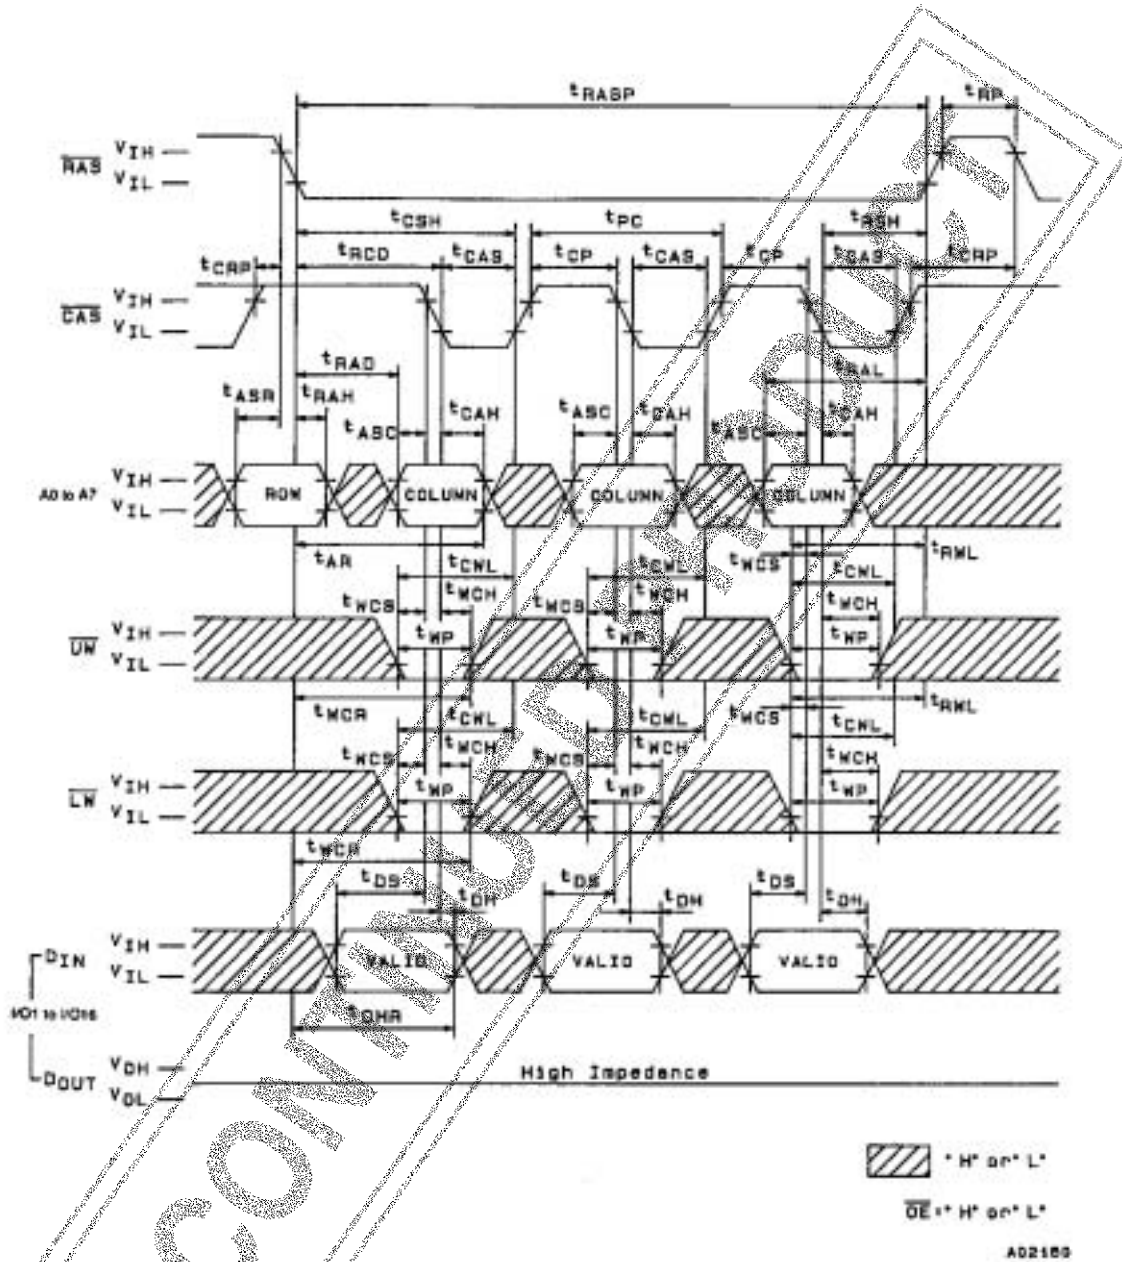

DISCONTINUED












Hidden Refresh Cycle

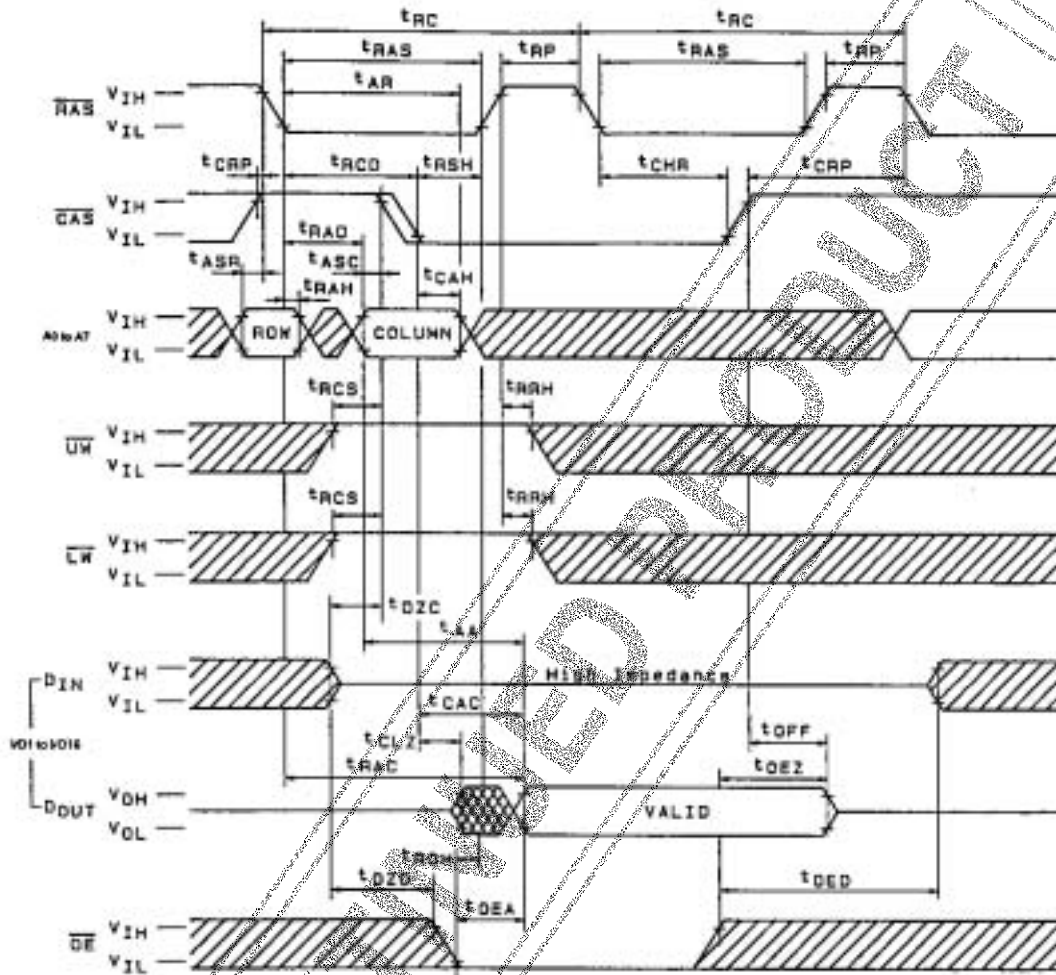


INVALID DATA \* H\* or \* L\*


A03280

DISCONTINUED PRODUCT

RAS-Only Refresh Cycle

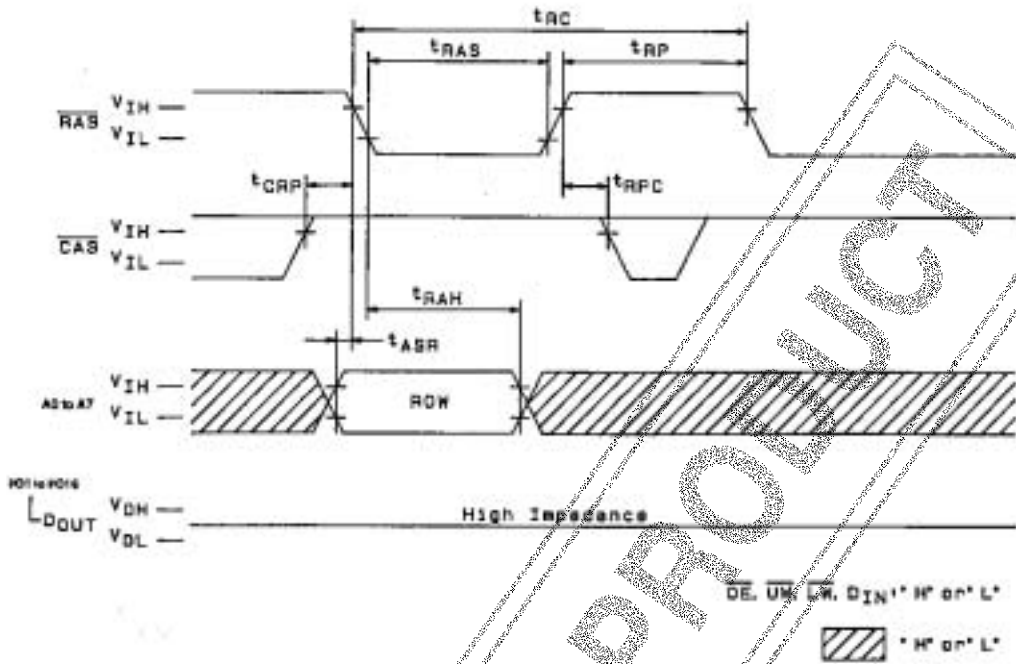


CAS-Before-RAS Refresh Cycle

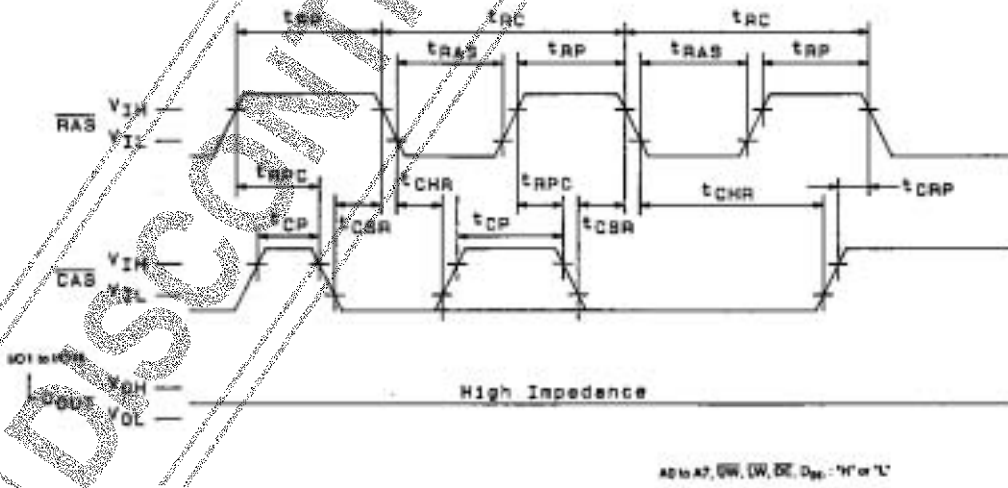


DISCONTINUED PRODUCT

CAS-Before-RAS Refresh Counter Test Cycle (Read)

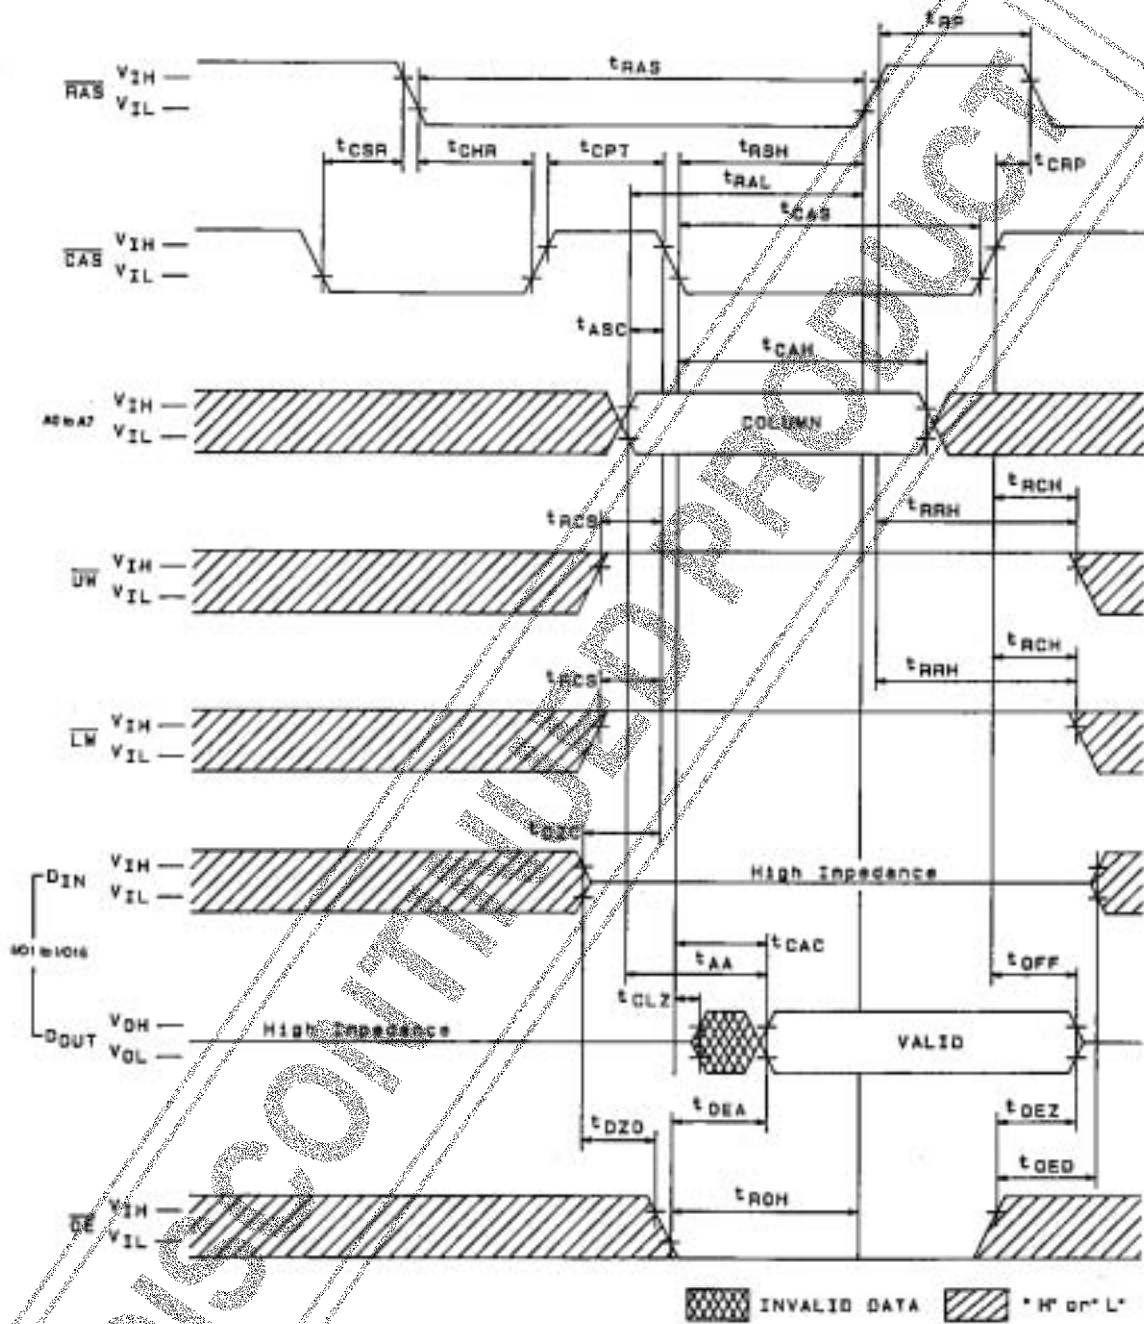


A02150

CAS-Before-RAS Refresh Counter Test Cycle (Write)

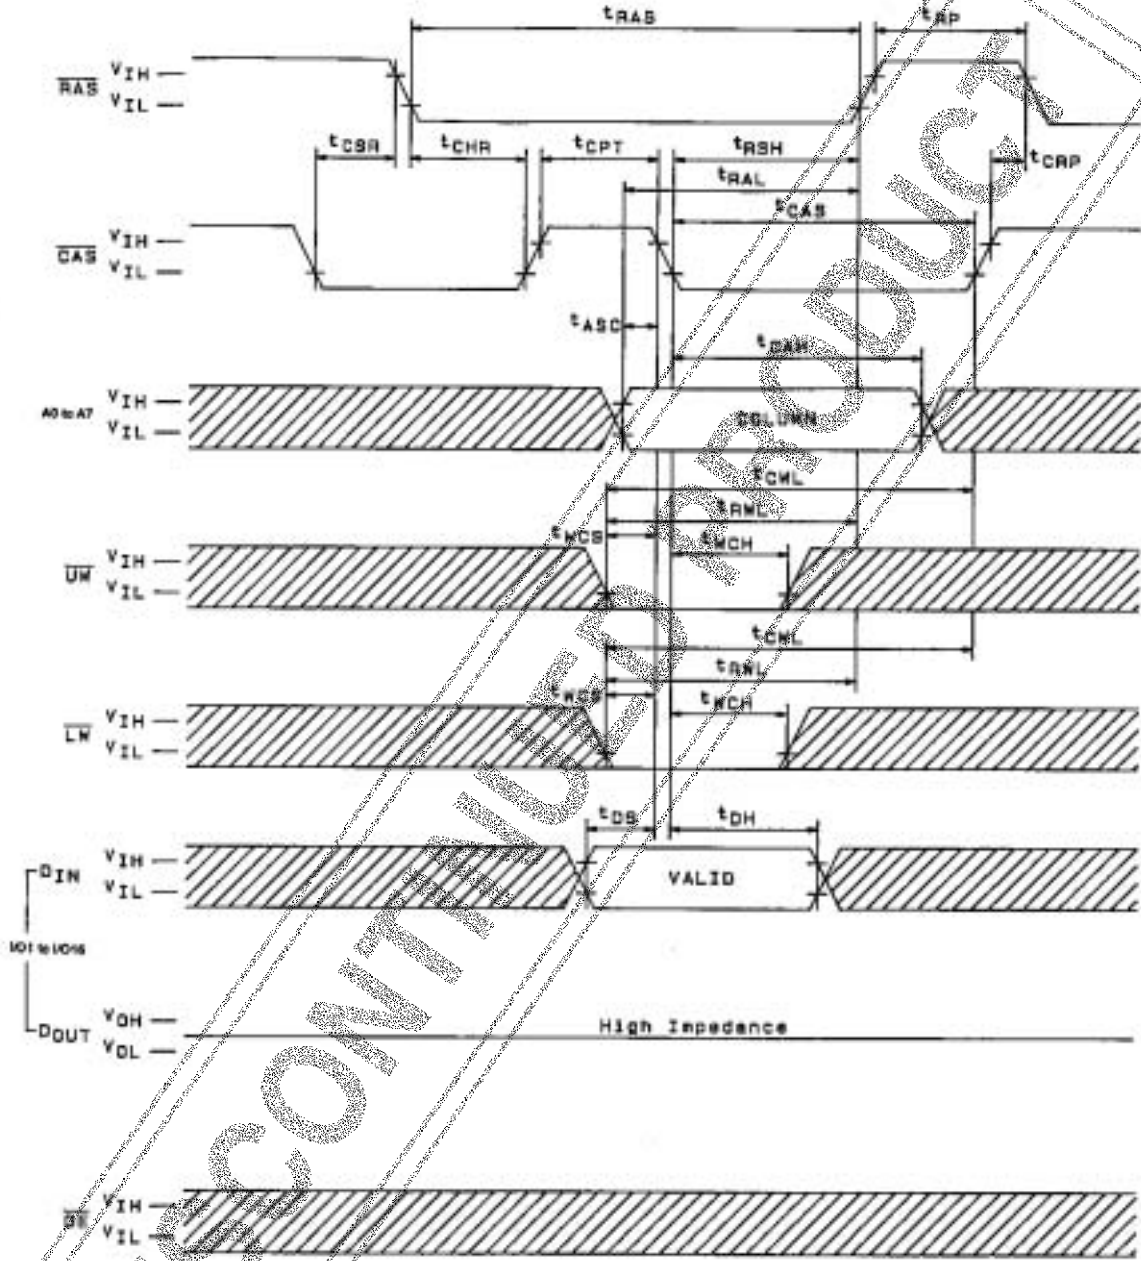

A02160

CAS-Before-RAS Refresh Counter Test Cycle (Read-Modify-Write)

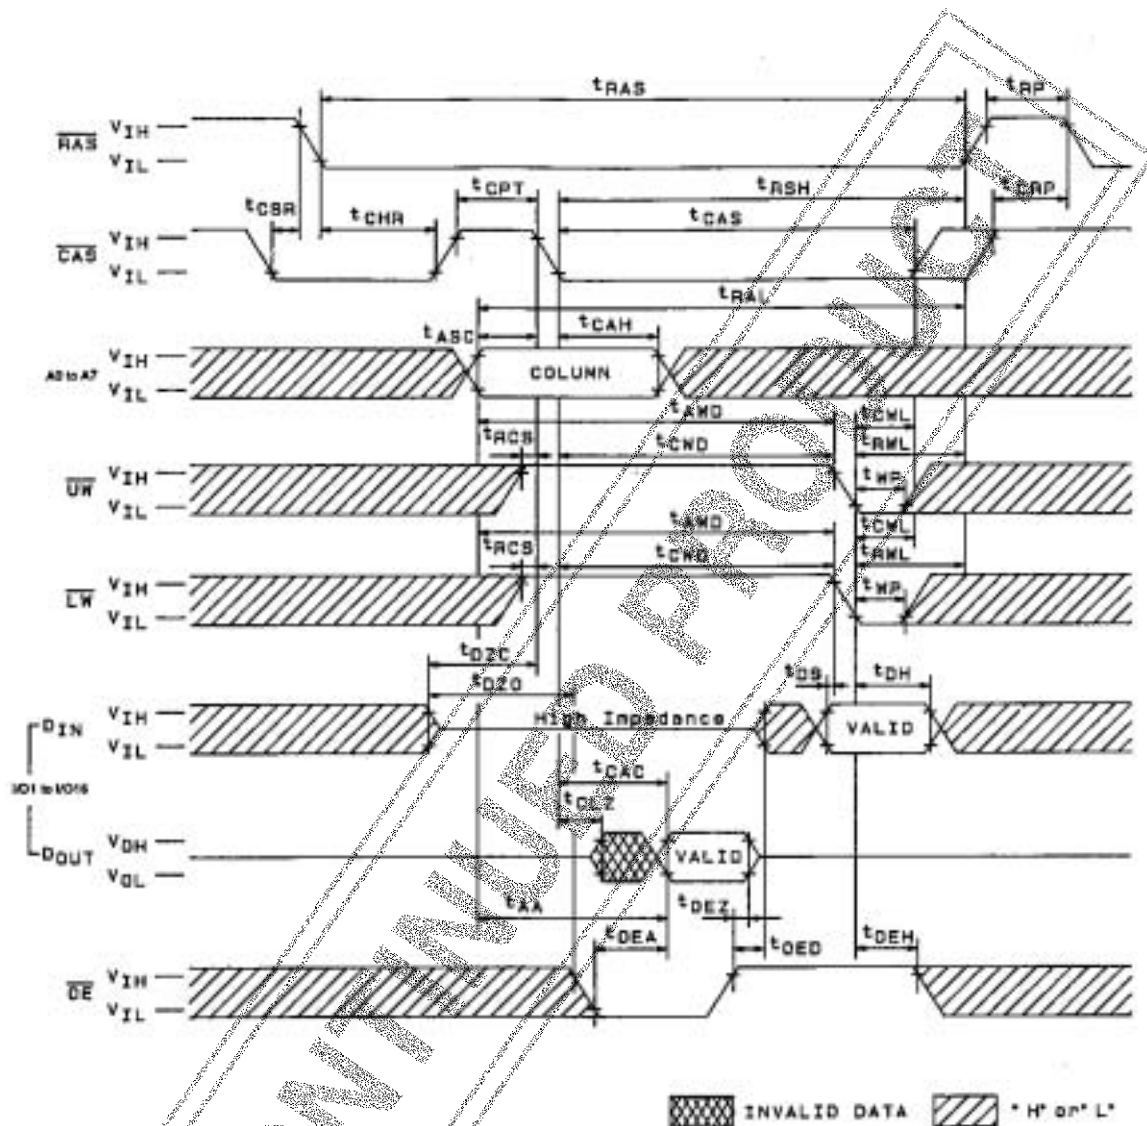

A02181

DISCONTINUED PRODUCT

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1996. Specifications and information herein are subject to change without notice.