



L 045 200 P.C.B. terminal blocks

► Standard Range - Screw clamp connection



Terminal blocks for connection parallel to P.C.B.
Single deck block, 1 pin per pole with dovetail.

Pin 0.6 x 0.9 x 4 mm
.024" x .035" x .157"
P.C.B. thickness ≤ 2.4 mm .094"
P.C.B. holes Ø 1.3 mm .052"
Body : UL94 V0 - PA
Grey

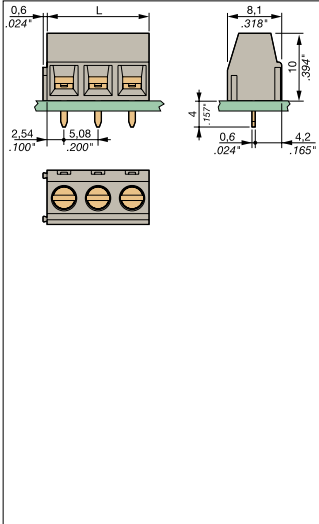

1 mm² - Spacing 5.08 mm .200"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0019	1000	10.16	1SSA 045 202 R1100
3	0.0028	500	15.24	1SSA 045 203 R1100

Other numbers of poles, consult us

UL94 V0 (in progress)




Technical data

Wire size		IEC	UL / CSA
Screw	Solid wire	0.5 - 1.5 mm ²	26 - 16 AWG
	Stranded wire With ferrule	0.5 - 1 mm ²	26 - 16 AWG
Rated voltage		250 V	150 V
Rated current		12 A	13.5 A
Short-circuit current			
Rated wire size / Gauge		1 mm ²	16 AWG
Storage temperature range		-20 ~ +80 °C	
Insulation resistance		≥ 10 ⁹ Ω	
Wire stripping length		5 - 6 mm / .196" - .236"	
Recommended screwdriver		2.5 mm / .098"	
Recommended torque		0.5 Nm / 4.5 lb.in	
Protection			


L 055 200 P.C.B. terminal blocks

► Standard Range - Screw clamp connection



Terminal blocks for connection parallel to P.C.B.
Single deck block, 1 pin per pole with dovetail.

Pin 0.8 x 0.9 x 3.5 mm
.031" x .035" x .138"
P.C.B. thickness ≤ 2.4 mm .094"
P.C.B. holes Ø 1.3 mm .052"
Body : UL94 V0 - PA
Grey

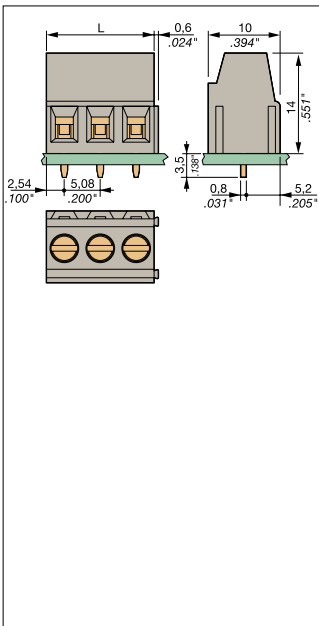

1.5 mm² - Spacing 5.08 mm .200"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0020	500	10.16	1SSA 055 202 R1100
3	0.0030	400	15.24	1SSA 055 203 R1100

Other numbers of poles, consult us

UL94 V0 CE

Technical data

Wire size		IEC	UL / CSA
Screw	Solid wire	0.5 - 2.5 mm ²	24 - 12 AWG
	Stranded wire With ferrule	0.5 - 1.5 mm ²	24 - 12 AWG
Rated voltage		250 V	300 V
Rated current		16 A	10 A
Short-circuit current			
Rated wire size / Gauge		1.5 mm ²	14 AWG
Storage temperature range		-20 ~ +80 °C	
Insulation resistance		≥ 10 ⁹ Ω	
Wire stripping length		6 - 7 mm / .236" - .276"	
Recommended screwdriver		2.5 mm / .098"	
Recommended torque		0.4 Nm / 3.6 lb.in	
Protection			