

TTL
MSI

TYPES SN54LS363, SN54LS364, SN74LS363, SN74LS364 OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS

BULLETIN NO. DL S 7612466, OCTOBER 1976

- High $V_{OH} \dots 3.65 \text{ V Min (74LS)}$
- Choice of 8 Latches or 8 D-Type Flip-Flops In a Single Package
- 3-State Bus-Driving Outputs
- Full Parallel-Access for Loading and Reloading
- Buffered Control Inputs
- Clock/Enable Input Has Hysteresis to Improve Noise Rejection and P-N-P Inputs To Reduce D-C Loading
- SN54LS373/SN74LS373 and SN54LS374/SN74LS374 Are Similar But Have Standard V_{OH} of 2.4 V Min

'LS363
FUNCTION TABLE

OUTPUT CONTROL	ENABLE G	D	OUTPUT
L	H	H	H
L	H	L	L
L	L	X	Q_0
H	X	X	Z

'LS364
FUNCTION TABLE

OUTPUT CONTROL	CLOCK	D	OUTPUT
L	\uparrow	H	H
L	\uparrow	L	L
L	L	X	Q_0
H	X	X	Z

See explanation of function tables on page 3-8.

description


These 8-bit registers feature totem-pole three-state outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance third state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight latches of the 'LS363 are transparent D-type latches meaning that while the enable (G) is high the Q outputs will follow the data (D) inputs. When the enable is taken low the outputs will be latched at the level of the data that was setup.


The eight flip-flops of the 'LS364 are edge-triggered D-type flip-flops. On the positive transition of the clock the Q output will be set to the logic state that was setup at the D input. The 'LS363 is particularly useful for interfacing to MOS logic where a higher than normal V_{OH} level is desirable such as that required by the TMS 8080A microprocessor.

Schmitt-trigger buffered inputs at the enable ('LS363) and clock ('LS364) lines simplify system design as ac and dc noise rejection is improved by typically 400 mV due to the input hysteresis. A buffered output control input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus line significantly.

SN54LS363 ... J PACKAGE
SN74LS363 ... J OR N PACKAGE
(TOP VIEW)

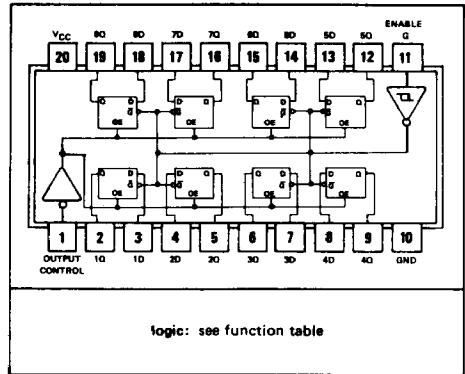

SN54LS364 ... J PACKAGE
SN74LS364 ... J OR N PACKAGE
(TOP VIEW)

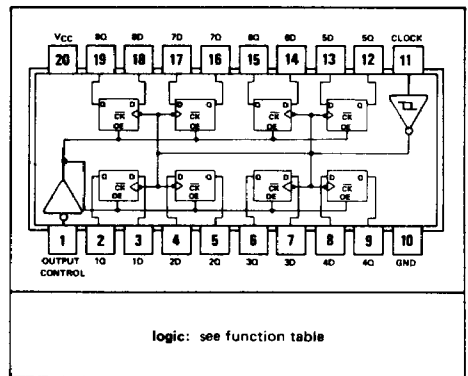


TYPES SN54LS363, SN54LS364, SN74LS363, SN74LS364 OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS

functional block diagram

Same as SN54LS373/SN74LS373 and SN54LS374/SN74LS374

schematics of inputs and outputs

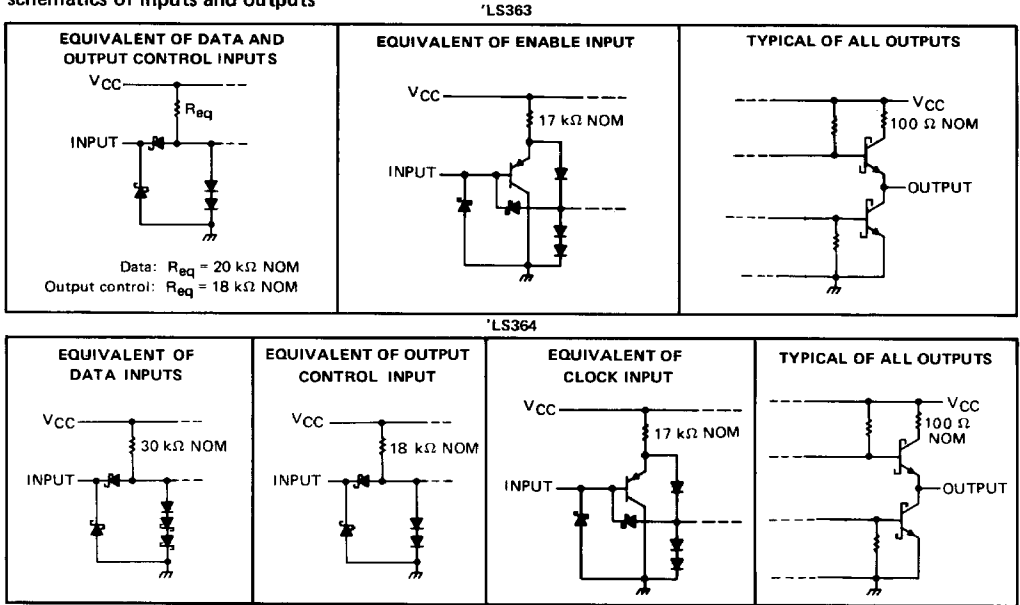

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	7 V
Off-state output voltage	7 V
Operating free-air temperature range: SN54LS'	-55°C to 125°C
SN74LS'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

		SN54LS'			SN74LS'			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}		4.5	5	5.5	4.75	5	5.25	V
High-level output voltage, V_{OH}				5.5			5.5	V
High-level output current, I_{OH}				-1			-2.6	mA
Width of clock/enable pulse, t_w	High	15			15			ns
	Low	15			15			ns
Data setup time, t_{SU}	'LS363	0↓			0↓			ns
	'LS364	20↑			20↑			ns
Data hold time, t_H	'LS363	10↓			10↓			ns
	'LS364	0↑			0↑			ns
Operating free-air temperature, T_A		-55		125	0		70	°C

↑↓ The arrow indicates the transition of the clock/enable input used for reference: ↑ for the low-to-high transition, ↓ for the high-to-low transition.

DESIGN GOAL

This page provides tentative information on a product in the developmental stage. Texas Instruments reserves the right to change or discontinue this product without notice.

TEXAS INSTRUMENTS
INCORPORATED
POST OFFICE BOX 5012 • DALLAS, TEXAS 75222

TYPES SN54LS363, SN54LS364, SN74LS363, SN74LS364 OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54LS'			SN74LS'			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.7			0.8	V
V _{IK}	Input clamp voltage	V _{CC} = MIN, I _I = -18 mA					-1.5	V
V _{OH}	High-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{ILmax} , I _{OH} = MAX			3.45		3.65	V
V _{OL}	Low-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{ILmax}		I _{OL} = 12 mA	0.25	0.4	0.25	0.4
				I _{OL} = 24 mA			0.35	0.5
I _{OZH}	Off-state output current, high-level voltage applied	V _{CC} = MAX, V _{IH} = 2 V, V _O = 3.65 V				20		20
I _{OZL}	Off-state output current, low-level voltage applied	V _{CC} = MAX, V _{IH} = 2 V, V _O = 0.4 V				-20		-20
I _I	Input current at maximum input voltage	V _{CC} = MAX, V _I = 7 V				0.1		0.1
I _{IH}	High-level input current	V _{CC} = MAX, V _I = 2.7 V				20		20
I _{IL}	Low-level input current	V _{CC} = MAX, V _I = 0.4 V				-400		-400
I _{OS}	Short-circuit output current§	V _{CC} = MAX			-30	-130	-30	-130
I _{CC}	Supply current	V _{CC} = MAX, Output control at 4.5 V			42	70	42	70

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS363			'LS364			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
f _{max}			C _L = 45 pF, R _L = 667 Ω, See Notes 2 and 3				35	50		MHz
t _{PLH}	Data	Any Q		15	23					ns
t _{PHL}				18	27					
t _{PLH}	Clock or enable	Any Q		19	30	21	33			ns
t _{PHL}				24	36	22	34			
t _{PZH}	Output Control	Any Q		16	28	16	28			ns
t _{PZL}			22	36	22	36				
t _{PHZ}	Output Control	Any Q	C _L = 5 pF, R _L = 667 Ω, See Note 3			12	20	10	18	ns
t _{PLZ}			16	25	14	24				

NOTES: 2. Maximum clock frequency is tested with all outputs loaded.

3. See load circuits and waveforms on page 3-11.

f_{max} ≡ maximum clock frequency

t_{PLH} ≡ propagation delay time, low-to-high-level output

t_{PHL} ≡ propagation delay time, high-to-low-level output

t_{PZH} ≡ output enable time to high level

t_{PZL} ≡ output enable time to low level

t_{PHZ} ≡ output disable time from high level

t_{PLZ} ≡ output disable time from low level

DESIGN GOAL

1076 This page provides tentative information on a product in the developmental stage. Texas Instruments reserves the right to change or discontinue this product without notice.

TEXAS INSTRUMENTS
INCORPORATED
POST OFFICE BOX 5012 • DALLAS, TEXAS 75222

TYPES SN54LS363, SN54LS364, SN74LS363, SN74LS364 OCTAL D-TYPE TRANSPARENT LATCHES AND EDGE-TRIGGERED FLIP-FLOPS

TYPICAL APPLICATION DATA

