


Low Profile PC Power Transformer

PARAMETER		UNITS
Power Rating	30	VA
Secondary Ratings Series Connected 2-3 & 6-7 (Input 220V Primary 50 Hz)	110 ± 5% 272.7	V mA
Secondary Ratings Parallel Connected 1-3 & 2-4 / 5-7 & 6-8 (Input 110V Primary 60 Hz)	55 ± 5% 545.4	V mA
DCR Primary (pins 1-2 or 3-4)	61 Typ.	Ω
DCR Secondary (pins 5-6 or 7-8)	15 Typ.	Ω
Isolation 1,2,3,4 to 5,6,7,8	1500 min.	V _{RMS}

Schematic Diagram

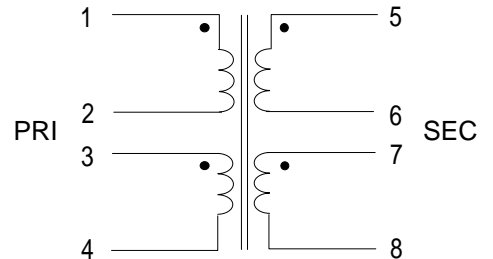


SEE BOTTOM VIEW FOR PIN OUT

Parallel External
Connections:
1-3, 2-4 & 5-7, 6-8


Series External
Connections:
2-3 & 6-7

Manufactured with UL Listed materials.

Physical Dimensions
inches (mm)

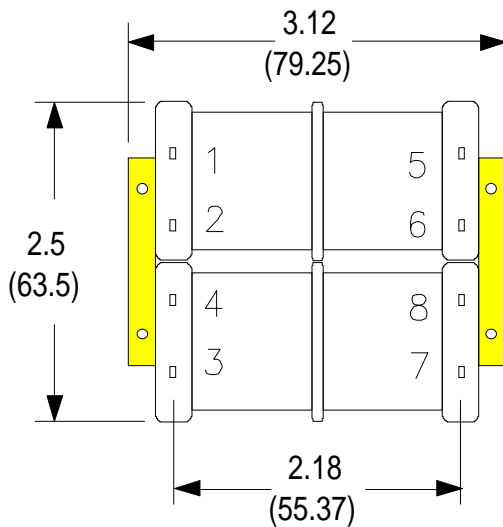

Bottom View

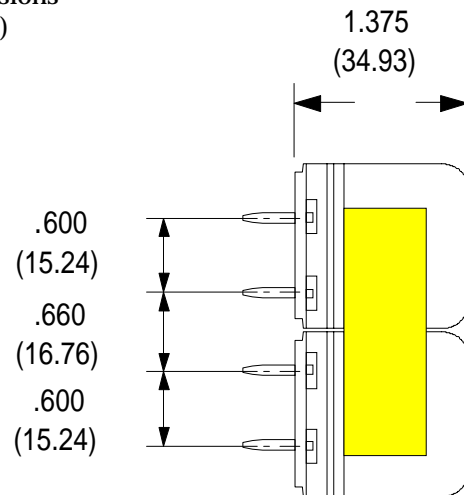

Side View

T-60366

12/15/95