



Technical Specification
of
1.31 μ m MQW-DFB Laser Diode Module
for 622Mb/s and 2.5Gb/s Transmission

SLT4260-xx/RH2 Series

RoHS Compliant



1. General

SLT4260-xx/RH2 Series are 1.31 μ m InGaAsP/InP MQW-DFB laser diode modules designed for fiber optic communication systems. These modules are ideally suitable for long reach and intermediate reach of 622Mb/s and 2.5Gb/s transmission applications.

A laser diode is mounted into a coaxial package integrated with an InGaAs monitor PD, a single mode fiber pigtail and a single-stage optical isolator (lead content is less than 1000ppm).

2. Package dimension and pin assignment

(See attached appendix.)

3. Absolute maximum ratings

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstg	-40~+85	°C
Operating case temperature	Top	-40~+85	°C
Peak optical output power	Pf	10	mW
Forward current (LD)	IfL	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage (PD)	VrP	15	V
Reverse current (PD)	IrP	2	mA
Soldering temperature (<10s)	Stemp	260	°C

4. Electrical and optical characteristics (Pf=2mW, Tc=+25°C, unless otherwise noted.)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold current	Ith	CW	—	10	15	mA
		CW, Tc=-40~+85°C	—	—	50	
Optical output power	Pf	CW, If=Ith+20mA	1.5	2.0	3.5	mW
		CW, If=Ith+20mA, Tc=-40~+85°C	0.75	—	5.0	
Operating voltage	Vf	CW, Tc=-40~+85°C	—	—	1.6	V
Slope efficiency	Se	CW	0.075	—	0.175	mW/mA
		CW, Tc=-40~+85°C	0.037	—	0.25	
Peak wavelength	λp	CW	1300	1310	1320	nm
		CW, Tc=-40~+85°C	1290	—	1330	
Side mode suppression ratio	SSR	CW, Tc=-40~+85°C	30	—	—	dB
Spectral width	Δλ	CW, RMS, Tc=-40~+85°C	—	—	1	nm
Tracking error	ΔPf	Im hold (@Pf=2mW(+25°C)), CW Tc=-40~+85°C	-1.0	—	1.0	dB
Rise time	tr	Ib=Ith, 20-80%, Tc=-40~+85°C	—	0.10	0.15	ns
Fall time	tf	Ib=Ith, 80-20%, Tc=-40~+85°C	—	0.10	0.15	ns
Extinction ratio	Er	10log(2mW/Pf(Ith)) Tc=-40~+85°C	10	—	—	dB
Monitor current	Im	CW, VrP=5V, Tc=-40~+85°C	50	—	1500	μA
Monitor dark current	Id	VrP=5V	—	1	10	nA
Monitor capacitance	C	VrP=5V, f=1MHz	—	—	10	pF

5. Fiber pigtail specification

Parameter	Min.	Typ.	Max.	Unit
Type	Single Mode			—
Mode field diameter@1310nm	8.5	9.5	10.5	μm
Cladding diameter	122	125	128	μm
Outer jacket diameter	0.8	0.9	1.0	mm
Bending radius	30	—	—	mm

6. Optical isolator specification (λ=1310nm, unless otherwise noted.)

Parameter	Condition	Min.	Typ.	Max.	Unit
Type	Single stage				—
Optical isolation	Tc=+25°C	30	—	—	dB
	Tc=-40~+85°C	20	—	—	

7. Ordering Information

Part Number for RoHS compliance	Pin assignment	Optical isolator	Connector type	Flange type (hole pitch)
SLT4260-CP/RH2	Type A	Single-stage isolator	SC/PC	Vertical (12mm)
SLT4260-CS/RH2				Horizontal (12.7mm)
SLT4260-CN/RH2				Flangeless
SLT4260-DP/RH2			FC/PC	Vertical (12mm)
SLT4260-DS/RH2				Horizontal (12.7mm)
SLT4260-DN/RH2				Flangeless
SLT4260-QP/RH2			SC/Angled PC	Vertical (12mm)
SLT4260-QS/RH2				Horizontal (12.7mm)
SLT4260-QN/RH2				Flangeless
SLT4260-XP/RH2			No connector	Vertical (12mm)
SLT4260-XS/RH2				Horizontal (12.7mm)
SLT4260-XN/RH2				Flangeless
SLT4266-CP/RH2	Type C	Single-stage isolator	SC/PC	Vertical (12mm)
SLT4266-CS/RH2				Horizontal (12.7mm)
SLT4266-CN/RH2				Flangeless
SLT4266-DP/RH2			FC/PC	Vertical (12mm)
SLT4266-DS/RH2				Horizontal (12.7mm)
SLT4266-DN/RH2				Flangeless
SLT4266-QP/RH2			SC/Angled PC	Vertical (12mm)
SLT4266-QS/RH2				Horizontal (12.7mm)
SLT4266-QN/RH2				Flangeless
SLT4266-XP/RH2			No connector	Vertical (12mm)
SLT4266-XS/RH2				Horizontal (12.7mm)
SLT4266-XN/RH2				Flangeless

8. Precaution

- (1) Radiation emitted by laser devices can be dangerous to the eyes. Avoid eye or skin exposure to direct or scattered radiation.
- (2) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (3) The stress to the fiber pigtail may cause the damage on the performance. The fiber pigtail may snap off by dropping the module.
- (4) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (5) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

9. RoHS Compliancy

On January 27, 2003, the European Parliament and the Council of the European Union issued the directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).

Member States shall ensure that, from July 1, 2006, new electrical and electronic equipment put on the market does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Applications listed in the Annex are exempted.

This product is compliant with RoHS 6/6 directive with exemptions "Lead in glass of cathode ray tubes, electronic components and fluorescent tubes" and "Lead as an alloying element in steel containing up to 0.35 % lead by weight, aluminium containing up to 0.4 % lead by weight and as a copper alloy containing up to 4 % lead by weight".

Appendix

Part No.: SLT426□-□□□ / □□□□□

(RH2or Customize Code)

Code	Connector type
C	SC/PC
D	FC/PC
L	LC/PC
M	MU/PC
Q	SC/Angled PC
X	No connector

Connector type

Code	Flange type
N	Flangeless
P	Vertical (12.0mm)
S	Horizontal (12.7mm)


Flange type

Code	Pin Assignment
0	Type A
1	Type B
6	Type C

Pin No.	Pin Function for Type A and Type B
1	LD Anode(CASE)
2	LD Cathode
3	PD Cathode
4	PD Anode

Pin No.	Pin Function for Type C
1	(CASE)
2	LD Cathode
3	PD Anode
4	LD Anode / PD Cathode

Pin assignment

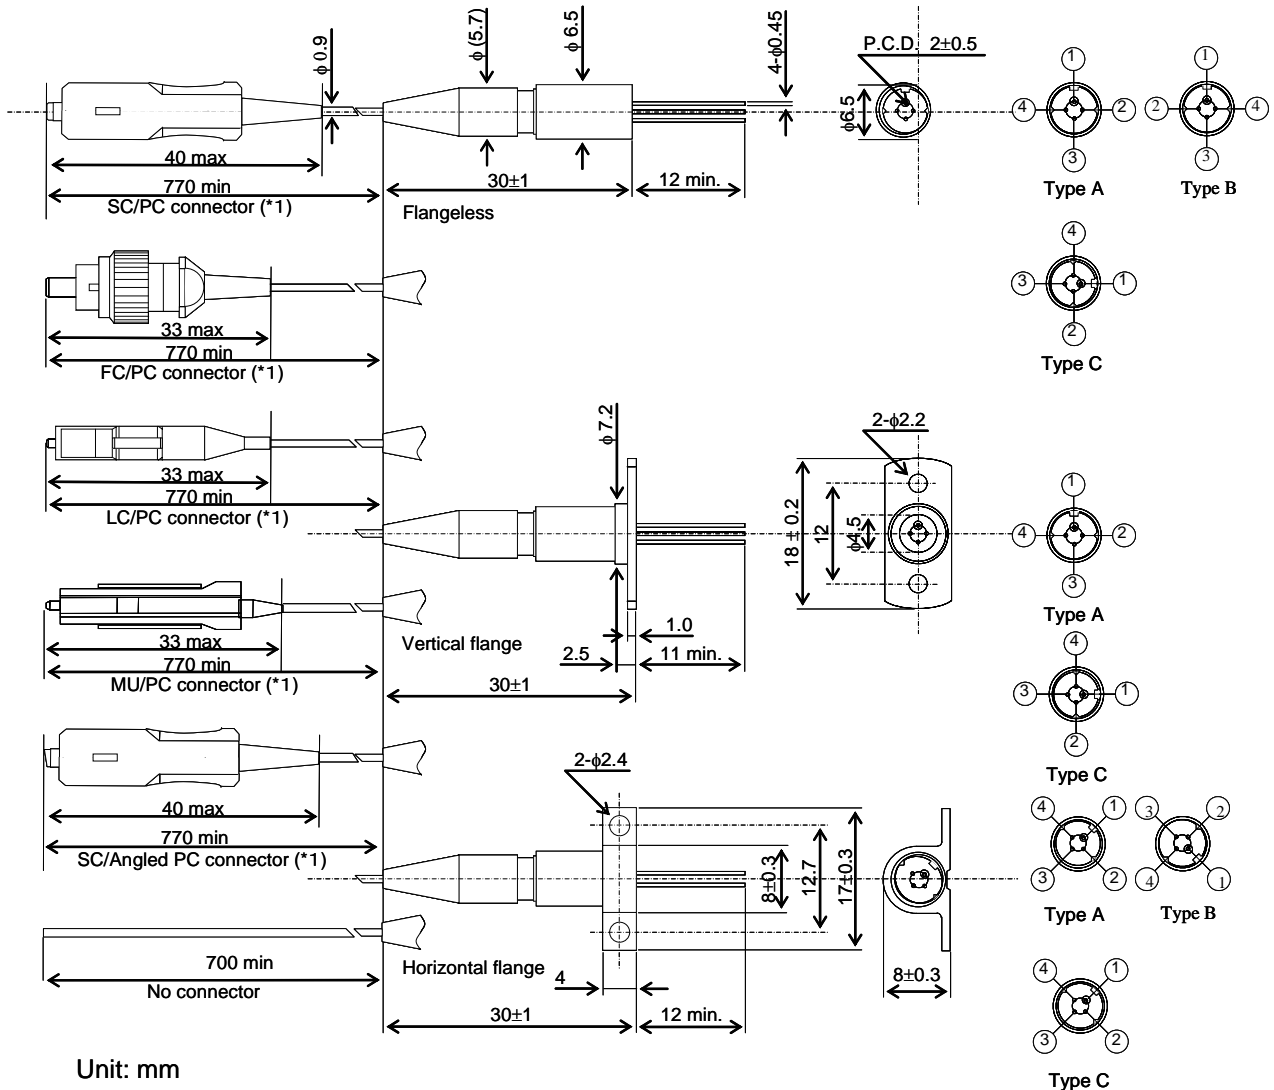

Unit: mm

Tolerance: ± 0.1 mm, unless otherwise noted.

Note: *1 IEC and JIS compliant. Detailed design not specified in the IEC and JIS standards is a subject to change without notice.

Sumitomo Electric Industries, Ltd.
Part No.: SLT4260-xx/RH2 Series
Document No.: HUW0824125-01A
Date of issue: October 9, 2008

10. For More Information

U.S.A.

ExceLight Communications Inc.

4021 Stirrup Creek Drive, Suite 200, Durham NC, 27703

U.S.A.

Tel. (919) 361-1600

Fax. (919) 361-1619

E-mail: info@excelight.com

URL: <http://www.excelight.com>

Europe

Sumitomo Electric Europe Ltd.

220 Centennial Park, Centennial Avenue, Elstree, Herts, WD6 3SL

United Kingdom

Tel. (020) 8953-8118

Fax. (020) 8207-5950

URL: <http://www.sumielectric.com>

Japan

Sumitomo Electric Industries, Ltd. (Opto-electronic Products Sales Div.)

3-12, Moto-Akasaka 1-chome, Minato-ku Tokyo, 107-8468

Japan

Tel. (03) 3423-5031

Fax. (03) 3423-5247

E-mail: product_info@ppd.sei.co.jp

URL: http://www.sei.co.jp/Electro-optic/index_e.html

Sumitomo Electric Industries, Ltd.
Part No.: SLT4260-xx/RH2 Series
Document No.: HUW0824125-01A
Date of issue: October 9, 2008

Revision Record

Document No.	Date of issue	Description	Incorporated by	Checked by	Approved by
HUW0824125-01A	Oct./09/08	Initial Issue	T. Takagi	M. Ito N. Fukushima	H. Michikoshi