




Methode's role as an innovator of interconnect products worldwide for over 50 years continues with RF Products designed to meet the most stringent industry requirements.

## MCX Series

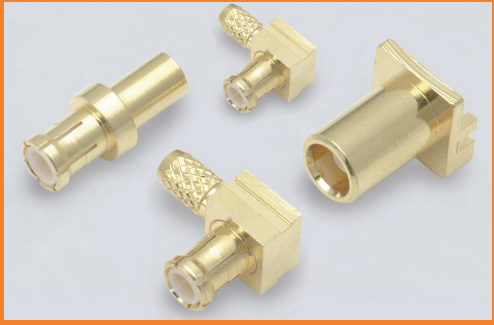

### Applications:

Process Controls, PC/LAN, Wireless, Telecommunications, Instrumentation

### \*Electrical Specifications:

Voltage Rating:	AC 250V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	1000 M $\Omega$ min at DC 500V
Contact Resistance:	5 m $\Omega$ max at DC 1A
Frequency Range:	0-6 GHz
Impedance:	50 Ohm
VSWR:	1.35 max

## MMCX Series



### Applications:

Wireless, Instrumentation, Antennas, Radio Boards, PCMCIA Cards, RF Test Ports, Base Stations, Global Positioning Systems, Cellular Telephones

### \*Electrical Specifications:

Voltage Rating:	AC 125V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	500 M $\Omega$ min at DC 500V
Contact Resistance:	5 m $\Omega$ max at DC 0.1A
Frequency Range:	0-6 GHz
Impedance:	50 Ohm
VSWR:	1.25 max

## F Series



### Applications:

NTSC TV Antennas, CATV, CIMS, HFC (Hybrid Fiber Coax) Networks

### \*Electrical Specifications:

Voltage Rating:	AC 150V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	500 M $\Omega$ min at DC 500V
Contact Resistance:	5 m $\Omega$ max at DC 1A
Impedance:	75 Ohm
VSWR:	1.2 max

*\*These characteristics are typical and may not apply to all connectors*