
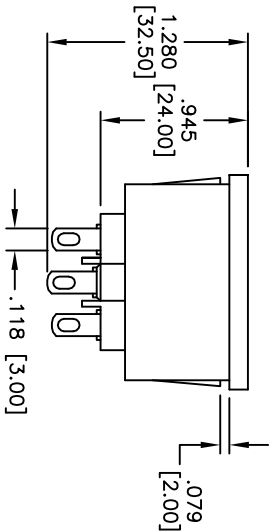
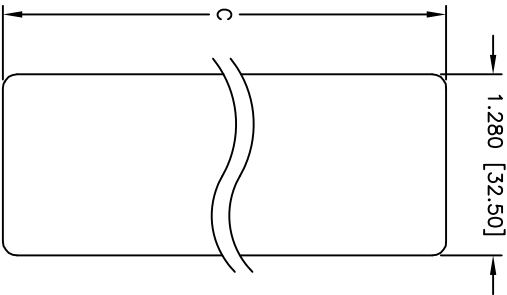
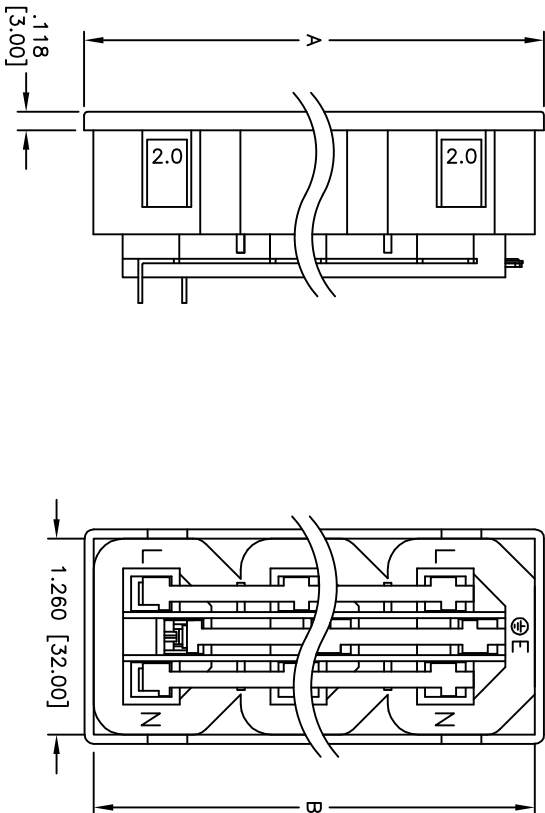


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/10	

APPROVED: _____

DATE: _____ TITLE: _____

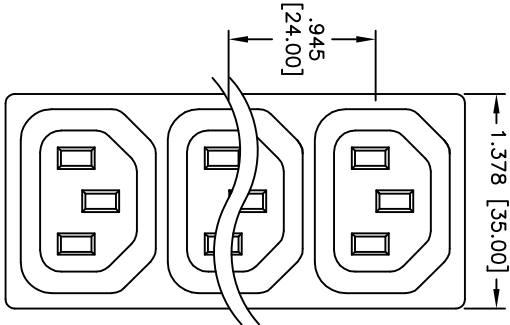

SPECIFICATIONS:

Material:

Insulator: Nylon 66, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC

Current rating: UL & CSA: 15 Amps max

VDE: 10 Amps max

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +70°C

Environmental:

Lead free, RoHS compliant

Recommended hand soldering temp: 235°C for 5 seconds

PART NUMBER	PORTS	DIMENSIONS		
		A	B	C
IEC-D-S2-200	2	2.008 [51.00]	1.890 [48.00]	1.902 [48.30]
IEC-D-S3-200	3	2.953 [75.00]	2.835 [72.00]	2.846 [72.30]
IEC-D-S4-200	4	3.898 [99.00]	3.780 [96.00]	3.791 [96.30]
IEC-D-S5-200	5	4.843 [123.00]	4.724 [120.00]	4.736 [120.30]
IEC-D-S6-200	6	5.787 [147.00]	5.669 [144.00]	5.681 [144.30]
IEC-D-S7-200	7	6.732 [171.00]	6.614 [168.00]	6.626 [168.30]

RECOMMENDED PANEL CUT-OUT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC FEMALE OUTLET STRIP

Snap-in Panel Mount

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN				DY				3/19/10			
CHECKED											
APPROVED											
SIZE				PART NO.				REV.			
X				IEC-D-SX-200				-			
REF: S0080T				SCALE: NTS				SHEET 1 OF 1			

