

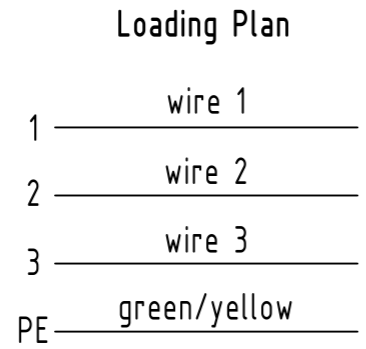
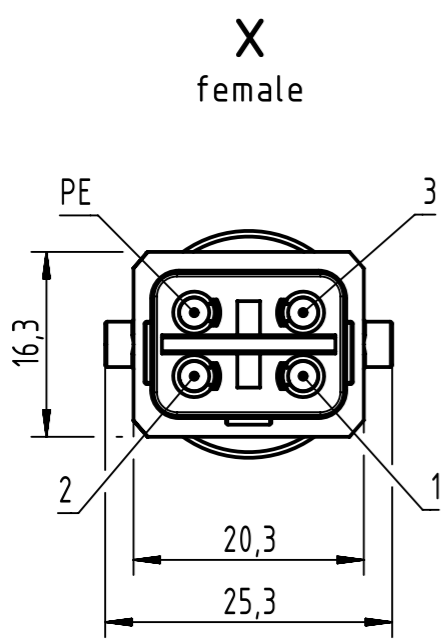


Connector Location A

Connector Location B

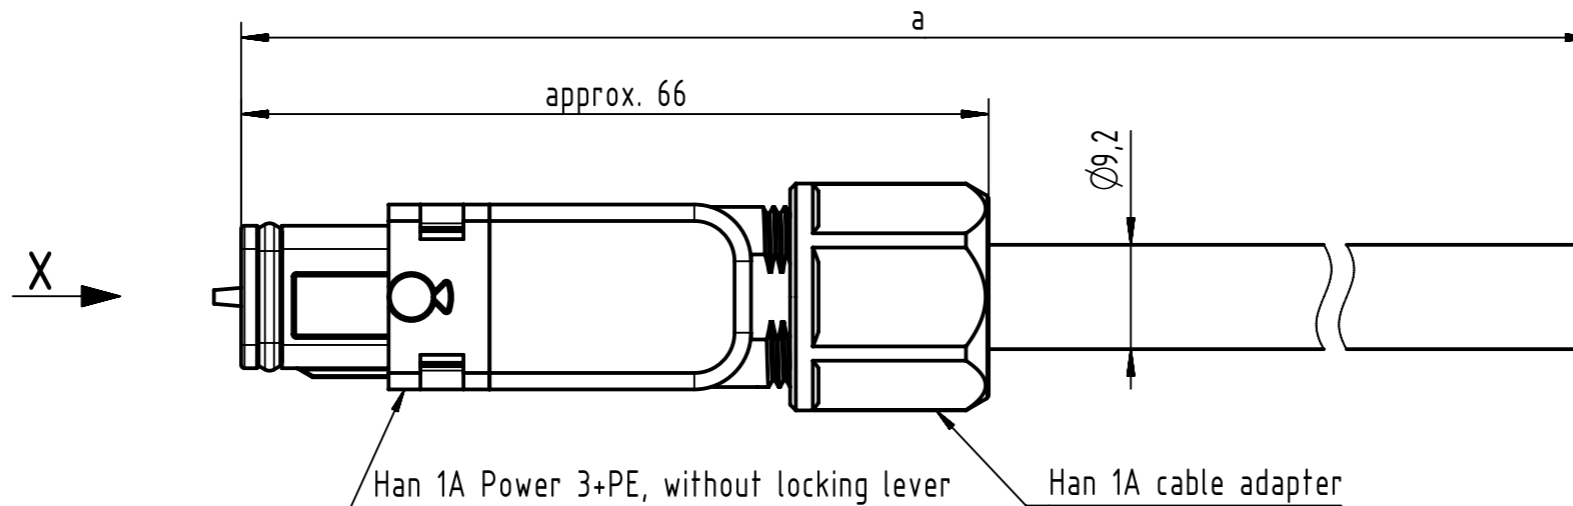

NOTE:
 * Silver plated contacts
 - Protection level: IP65
 - Temperature range: -30°C ... +80°C

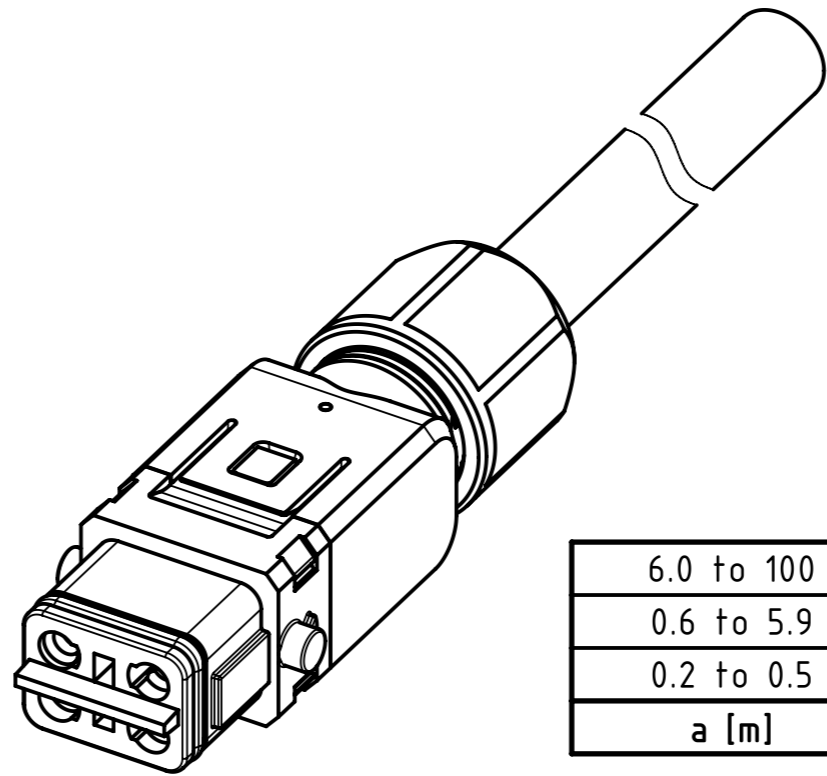

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
Step	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

JZ-500 4G2.5mm ² , PVC, grey	33500100201XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by 402676	Inspected by COSTEA	Standardisation MUNTEANV	Date 2020-04-02	State Final Release	
Department HCS - RO		Gross	Costea	Muntean	Title Han1A CA 3+PE -lever f/- PVC		
HARTING Customised Solutions		Type TB		Number 33500100201XXX		Doc-Key / ECM-Nr. 100838310/UGD/000/A 500000170249	
D-32339 Espelkamp		Rev. A		Page 1/1			