


P.C.B. LAYOUT

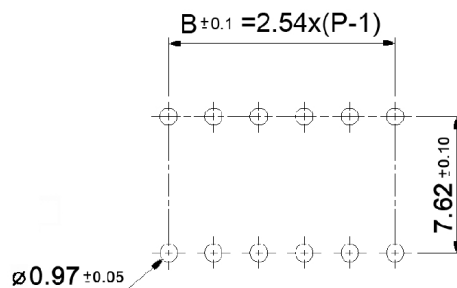

Type	Poles	A	B
DBP 2102	2	6.64	2.54
DBP 2103	3	9.18	5.08
DBP 2104	4	11.72	7.62
DBP 2105	5	14.26	10.16
DBP 2106	6	16.80	12.70
DBP 2107	7	19.34	15.24
DBP 2108	8	21.88	17.78
DBP 2109	9	24.42	20.32
DBP 2110	10	26.96	22.86
DBP 2112	12	32.04	27.94

Specifications:

- Contact rating: 25mA, 24V DC / 100mA, 6V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V, 50Hz for the duration of 1 minute
- Operating temperature: -20°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: auto-soldering: max.: 260°C, 5sec.
- Mounting: on pc-board
- Slide position: off
- Material: PBT meets UL94V-0
- Contacts: gold plated over nickel



Tolerances:	Date	Name	<h1>DBP 21xx</h1>
	08/08	dr	
	knitter-switch		<h1>30 15 78</h1>
Modifications	Date	Name	Page 1/1