

# Panasonic

## UN06A11

UMTS Band 11/21 Power Amplifier IC  
(1427.9MHz to 1462.9MHz)

### Applications

- WCDMA handset
- HSDPA
- HSUPA
- LTE

### Outline


- PAMP09-N2

### Type

- Hybrid Integrated Circuit


### Features

- High efficiency operation at any power
  - 42% @ 28.5dBm
  - 30% @ 17dBm
  - 17% @ 7dBm
- Small, low profile package  
3mm x 3mm x 0.85mm (1mm Max)
- Low Voltage Positive Bias Supply  
(3.2V to 4.2V)
- 3-Mode Power States with Digital Control Interface
- Integrated Power Coupler
- Integrated Blocking capacitors

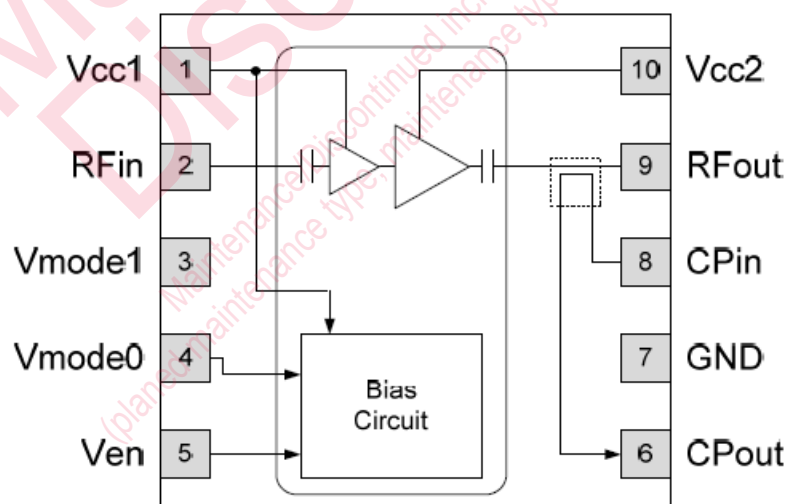


## Pin Assignment

Pin No.	Pin Name
1	Vcc1
2	RFin
3	Vmode1
4	Vmode0
5	Ven
6	CPout
7	GND
8	CPin
9	RFout
10	Vcc2
11	GND

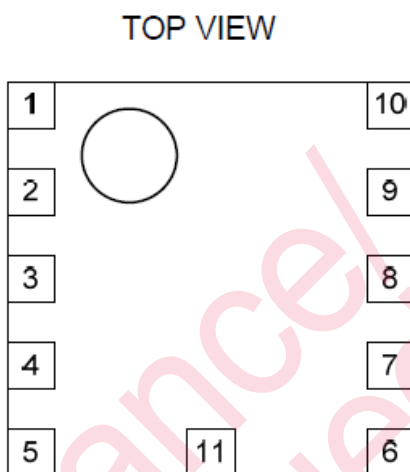

Note :Pin No.11 shows the central terminal at the bottom package.

## Recommended Circuit

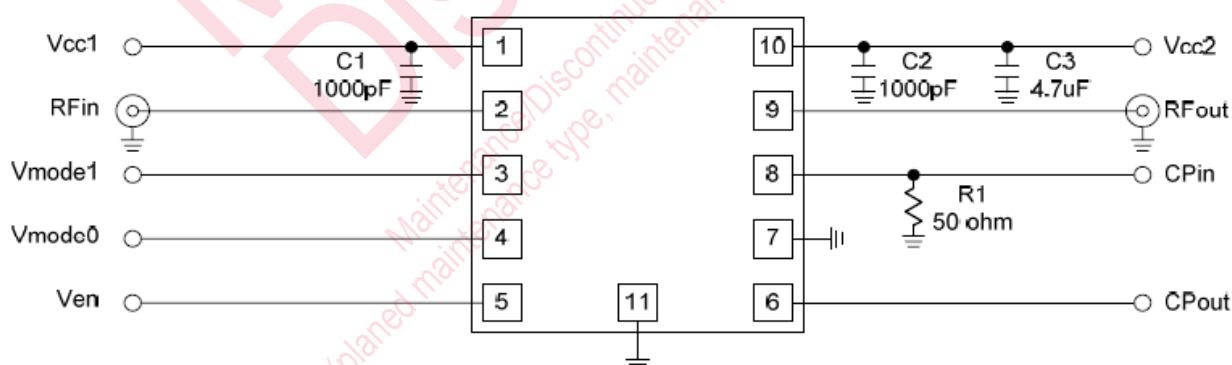

C1 :1000pF to 0.1uF (Set up C1 from the terminal Vcc1 to the distance within 1mm.)

C2 :1000pF to 0.1uF (Set up C2 from the terminal Vcc2 to the distance within 1mm.)

C3 :1uF to 4.7uF (Set up C3 from the terminal Vcc2 to the distance within 30mm.)

R1 : 50 ohm



■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	Notes
Supply voltage	Vcc1,2	6	V	1,2
Control voltage	Ven, Vmode0, Vmode1	4.2	V	1
Input RF power	Pin	10	dBm	1,3
Storage temperature	Tstg	-35 to +150	°C	1

■ Operating Ranges

Parameter	Condition	Symbol	Min	Typ	Max	Unit	Notes
Operating Frequency			1427.9		1462.9	MHz	
Supply Voltage			3.2	3.4	4.2	V	
Enable Voltage	Low		0		0.5	V	
	High		1.35	1.8	3.1		
Mode Control Voltage	Low		0		0.5	V	
	High		1.35	1.8	3.1		
Case Temperature (Tc)	UMTS		-20		85	°C	

■ Modes of operation

Parameter	Ven	Vmode0	Vmode1	Pmax		
				Rel99	HSPA	LTE
High-power mode (HPM)	High	Low	Low	≤ 28.5	≤ 27.25	≤ 27.25
Medium-power mode (MPM)	High	High	Low	≤ 17	≤ 16	≤ 16
Low-power mode (LPM)	High	High	High	≤ 7	≤ 6	≤ 6
Shut down mode	Low	Low	Low	-	-	-



■ Electrical performance-1

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=+25°C, Z<sub>S</sub>=Z<sub>L</sub>=50Ω  
 f=1427.9 to 1462.9MHz Signal Condition:Rel99

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Notes
Gain	G1	HPM, Pout=28.5dBm MPM, Pout=17dBm LPM, Pout=7dBm	28.0 14 9	30.0 18.0 15.0		dB	
Total Supply Current	I <sub>ct</sub>	HPM, Pout=28.5dBm MPM, Pout=17dBm LPM, Pout=7dBm		500 48 8	560 63 13	mA	
Power Added Efficiency	PAE	HPM, Pout=28.5dBm MPM, Pout=17dBm LPM, Pout=7dBm	37 22 10	42 30 17		%	
Adjacent channel leakage power ratio1	ACLR1	5MHz offset HPM, Pout=28.5dBm MPM, Pout=17dBm LPM, Pout=7dBm		-42	-36	dBc	4
Adjacent channel leakage power ratio2	ACLR2	10MHz offset HPM, Pout=28.5dBm MPM, Pout=17dBm LPM, Pout=7dBm		-57	-46	dBc	4
Quiescent current	I <sub>idle2</sub>	V <sub>cc</sub> =3.4V, Pin=off, V <sub>en</sub> =1.8V V <sub>mod0</sub> =1.8V, V <sub>mod1</sub> =1.8V		3		mA	
Mode0 control current	I <sub>mode0</sub>				0.1	mA	
Mode1 control current	I <sub>mode1</sub>				0.1	mA	
Enable current	I <sub>en</sub>				0.1	mA	
Leakage Current	I <sub>off</sub>	V <sub>cc</sub> =3.4V, Pin=off, V <sub>en</sub> =0V		5	10	μA	
2nd harmonic	2f <sub>0</sub>	HPM, Pout=P <sub>max</sub>		-40	-35	dBc	
3rd harmonic and higher	3f <sub>0</sub>	HPM, Pout=P <sub>max</sub>		-50	-42	dBc	
Input impedance VSWR	ρ <sub>IN</sub>	HPM, Pout=P <sub>max</sub>		1.3:1	2.5:1		

■ Electrical performance-2

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=+25°C, Z<sub>S</sub>=Z<sub>L</sub>=50Ω  
 f=1427.9 to 1462.9MHz Signal Condition:HSPA

Adjacent channel leakage power ratio3	ACLR3	5MHz offset Pout = P <sub>max</sub> -MPR		-42	-36	dBc	4
Adjacent channel leakage power ratio4	ACLR4	10MHz offset Pout = P <sub>max</sub> -MPR		-58	-46	dBc	4



■ Electrical performance-3

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=+25°C, Z<sub>S</sub>=Z<sub>L</sub>=50Ω  
f=1427.9 to 1462.9MHz Signal Condition:LTE

Adjacent channel leakage power ratio5	ACLR5	E-UTRA_ACLR P <sub>out</sub> ≤ P <sub>max</sub> -MPR		-39	-33	dBc	4,5
Adjacent channel leakage power ratio6	ACLR6	UTRA_ACLR1 P <sub>out</sub> ≤ P <sub>max</sub> -MPR		-41	-36	dBc	4,5
Adjacent channel leakage power ratio7	ACLR7	UTRA_ACLR2 P <sub>out</sub> ≤ P <sub>max</sub> -MPR		-47	-39	dBc	4,5

■ Electrical performance-4

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=+25°C  
f=1427.9 to 1462.9MHz

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Notes
stability, spurious levels	S	P <sub>out</sub> ≤ P <sub>max</sub> VSWR ≤ 5:1, all phase			-70	dBc	
Ruggedness	R	P <sub>out</sub> ≤ P <sub>max</sub> all phase			8:01	VSWR	

■ Electrical performance-5

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=+25°C, Z<sub>S</sub>=Z<sub>L</sub>=50Ω  
f=1427.9 to 1462.9MHz

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Notes
RX noise	NP1	P <sub>out</sub> ≤ P <sub>max</sub> 48 MHz offset from Tx		-135	-133	dBm/Hz	
GPS noise	NP2	P <sub>out</sub> ≤ P <sub>max</sub> 1574 to 1577 MHz		-137	-134	dBm/Hz	
ISM noise	NP3	P <sub>out</sub> ≤ P <sub>max</sub> 2400 to 2483.5 MHz		-142	-135	dBm/Hz	

■ Electrical performance-6

f=1427.9 to 1462.9MHz

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Notes
Coupler factor	CF		19	20	21	dB	
Daisy-chain insertion loss	DCil	CPL_IN to CPL_OUT ports, 698 to 2620 MHz, Enable = low		0.1	0.25	dB	

■ Electrical performance-7

V<sub>cc</sub>=3.4V, V<sub>en</sub>=1.8V, T<sub>a</sub>=-25 to +85 °C, Z<sub>S</sub>=Z<sub>L</sub>=50Ω  
f=1427.9 to 1462.9MHz Signal Condition:Rel99

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Notes
Phase discontinuity variation	Pdv	Part to part variation	-10		10	deg	

## Notes


- 1: The backside ground of the package should be soldered to cellular phone P.C.B.
- 2:  $V_{en}=0V$
- 3:  $V_{cc1}=V_{cc2}=3.4V$ ,  $V_{en}=2.9V$ ,  $V_{mode0}=0V$ ,  $V_{mode1}=0V$ ,  $R_L=50\Omega$
- 4: RF measurements shall be made with 3GPP TS25.101 (UTRA/FDD UE) and TS36.101 (LTE) specification compliant waveforms.
  - a. MPR is the maximum power reduction, as defined by the 3GPP specifications.  
In case of using waveforms with a higher peak-to-average ratio, MPR shall be applied.  
(ranging from 0 to 2.5 dB)
  - b. The worst-case MPR = 0 dB waveforms across the 3GPP specifications are required to meet a 1.25 dB lower maximum power than 3GPP TS25.101 Rel99 case.
- 5: The LTE ACLR test is as defined in TS36.101, Section 6.6.2.3.
  - a. The minimum requirement of E-UTRA<sub>ACLR</sub> is defined in Section 6.6.2.3.1.
  - b. The minimum requirement of UTRA<sub>ACLR</sub> is defined in Section 6.6.2.3.2.

Maintenance/Discontinued

Maintenance/Discontinued includes following four Product lifecycle stage.  
(planned maintenance type, maintenance type, planned discontinued type, discontinued type)

# Panasonic

## ■ Marking

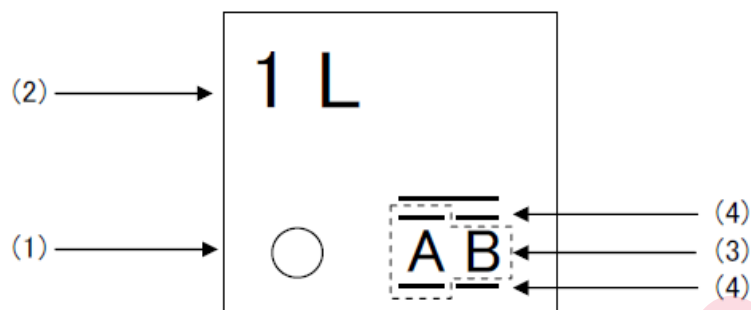

(1) Pin No.1

(2) Product Name

1L : 1L shows UN06A11

(3) Lot No.

A B

A: 1 to 9, A to Z and the top and bottom bar are jointly used.

(However, neither I, O nor Q are used)

B: A to Z are jointly used. (However, neither I, O nor Q are used)

(4) Product Year

Product year is shown by an upper and lower bar.


bar		year
<u>A</u> <u>B</u>	Lower bar	2011
<u>A</u> <u>B</u>	Upper and lower bar	2012
<u>A</u> <u>B</u>	Upper bar	2013
AB	without bar	2014

It uses after 2015 repeatedly from the lower bar.



# Panasonic

■ Recommended land pattern

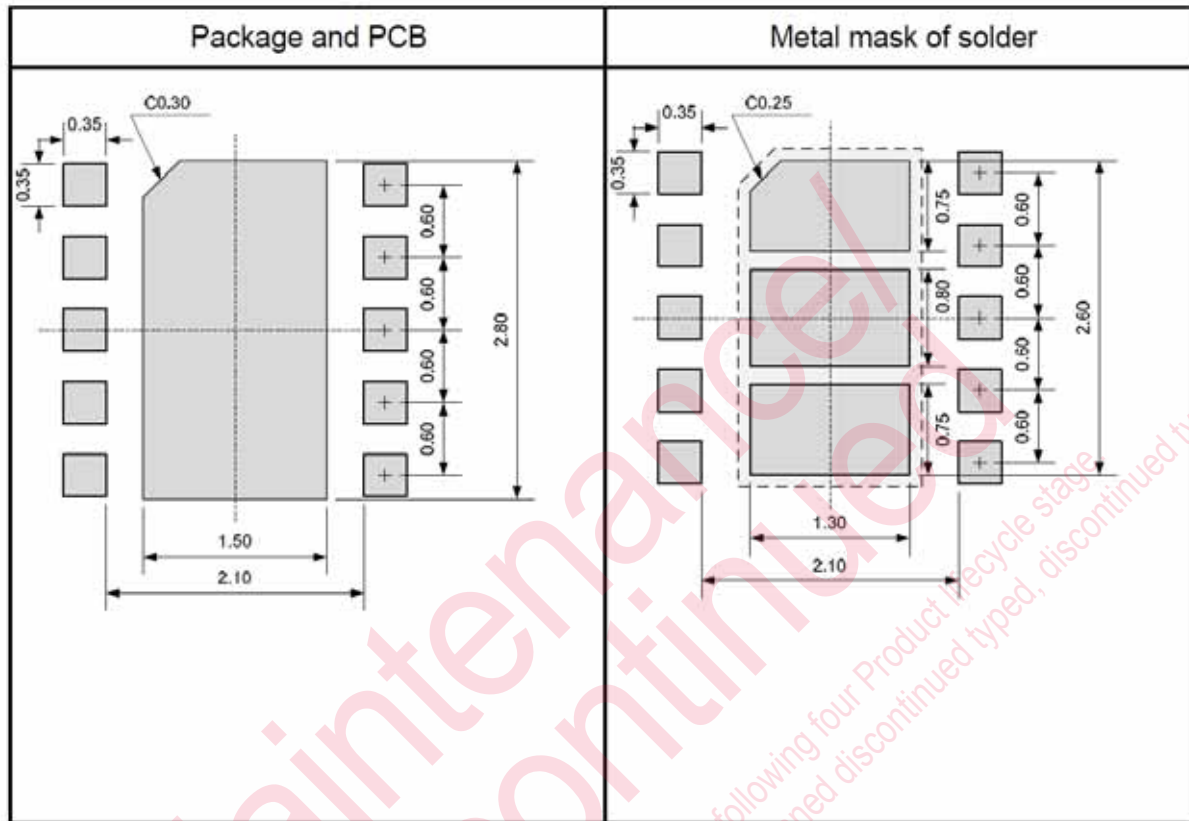


Maintenance/Discontinued

Maintenance/Discontinued includes following four Product lifecycle stage (planned maintenance type, maintenance type, planned discontinued type, discontinued type)


# Panasonic

## ■ Packing figure

### 1) Taping form

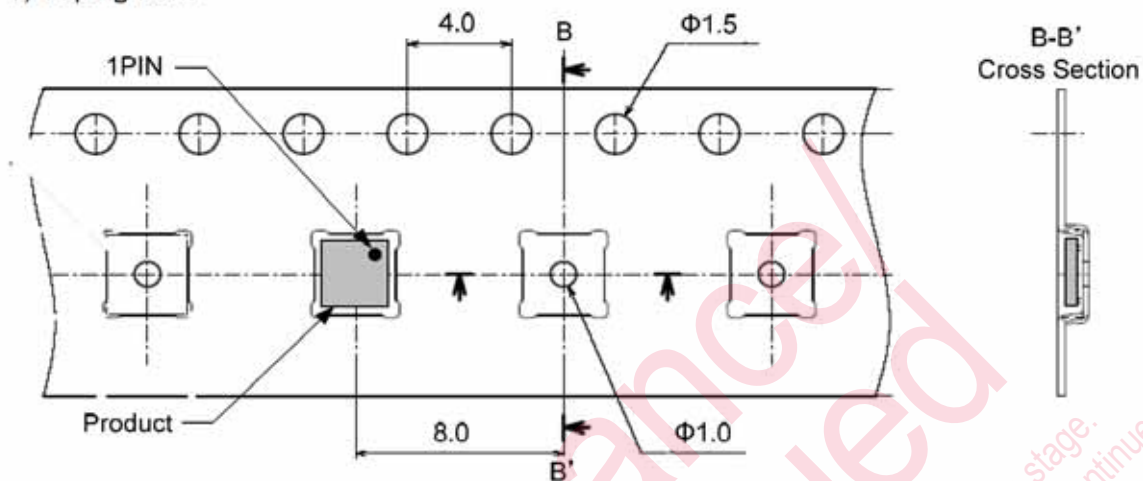

### 2) Reel form

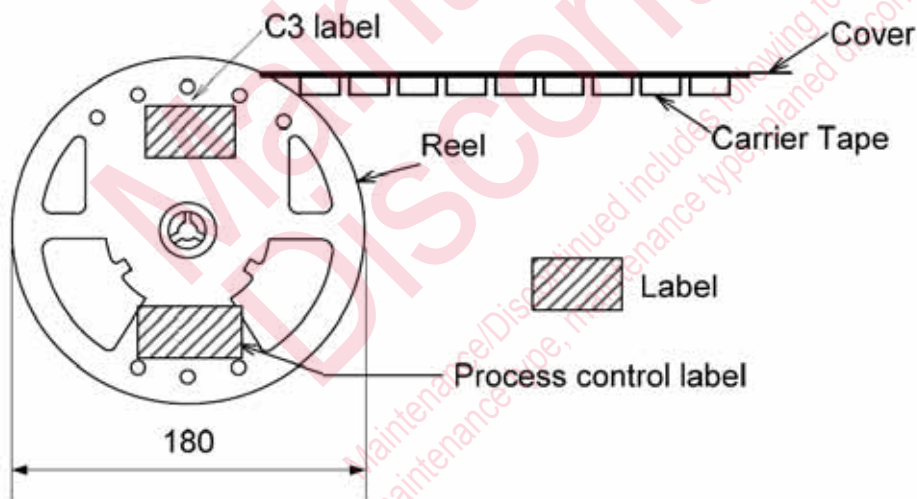


Reel, Carrier Tape and Covered Tape is antistatic treatment.  
The lack of the product is not permitted.

# Panasonic

## Recommended reflow temperature profile in lead-free soldering


In reflow soldering process, exact temperature-cycle management is essential. We recommend pre-heating before soldering, so that you can prevent not only package damages or stains but also damages on a printed circuit board, and your process becomes stable.

The following shows our recommended reflow temperature profile.

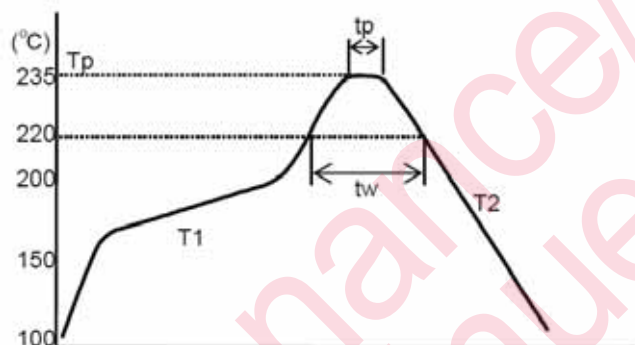

Pre-heating temp	T1	160°C to 180°C, 1 to 2 minutes
Peak temp	Tp	Below 235°C
Heating time	tp	Below 10sec. (over 230°C)
Storage time in high temp	tw	Over 30sec. (over 220°C)
Cooling time	T2	Over 2minutes. (natural neglect in normal temperature)

Fig1 Solder wettability line

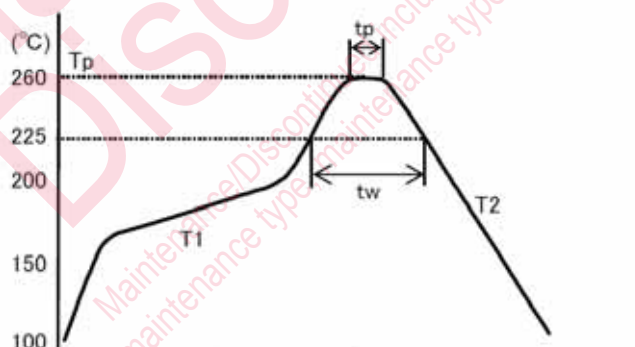

Pre-heating temp	T1	150°C to 190°C, 1 to 3 minutes
Peak temp	Tp	Below 260°C
Heating time	tp	Below 10sec. (over 255°C)
Storage time in high temp	tw	30 to 70sec. (over 225°C)
Cooling time	T2	Over 2minutes. (natural neglect in normal temperature)
Cooling time		2 times

Fig2 Solder heat resistance line

Note1 : Specified temperature is package surface temperature.

Note2 : N2 reflow is available.

Note3 : Available solder is Sn-3.0Ag-0.5Cu.

## ■ Notes on handling

- 1 Please, be fully careful of sudden heat, rapid cooling, and local heating, because this product is made by the resin board and the epoxy resin on structure. Please don't use the product dropped from higher place, because there is a risk of damage about the resin used in low elastic modulus by fall, a shock and so on.
- 2 Please, don't touch Au plating area of product by bare hand, and don't hurt, because Au is plated on the product electrode as exterior plating.
- 3 You must finish mount and reflow soldering within seven days after opening the dry pack in order to prevent exposure of moisture. Please keep the product at the atmosphere of the temperature from 5°C to 30°C and the humidity from 30%RH to 70%RH. Please keep the product in stable place of temperature and humidity without corrosive gas. If you keep product in that stable place, you may mount and reflow soldering in three months.
- 4 Please prevent product from an excessive stress when you mount to a print board. Moreover, please avoid the mechanical chucking of a product.
- 5 Although it is impossible to use the strong acid as the solder flux, it is possible to use the one of a rosin material. The method of reflow soldering is our recommendation. Please refer a temperature profile of reflow soldering as shown in Fig. 1 at the page 15 of this document. In addition, please refer a recommendation of land pattern as shown in the figure of the page 13 of this document.
- 6 Please don't carry out washing using a solvent after reflow soldering. also by ultrasonic wave cleaning.
- 7 Please be careful not to expose product static electricity, surge, etc.

## ■ Handling of dry packed products

### 1. Adaptation

In order to realize stable soldering, We ship this product with dry packing. Please take care with the following point, when you use dry packed products.

### 2. The storage conditions of a product

Be careful enough of storage environment irrespective of opening or un-opening. The product storage should avoid getting wet, corrosive gas, and fire.

[Recommended storage environment]

Temperature : 5 to 30 °C

Humidity : 30 to 70%RH

Period : Less than 1 year

(Within 1 year after the manufacture date code of C3 label)

### 3. Handling after opening dry packing

In order to avoid the moisture absorption to a product, after opening dry packing should finish mounting and reflow soldering altogether within regulation time.

[The period which can be after opening dry packing]

Period : 7 + 7 days

In the case of storage in recommended storage environment

<Attention>

Packing specification of this product is taping.

Taping material is not heat-resistant materials.

Therefore, you must finish mount and reflow soldering within regulation time.

Unavoidably If you can't finish within regulation time, you must bake the products by low-temperature baking conditions.

### 4. Low-temperature baking conditions

Please carry out product re-dryness in the taping state on the following conditions.

[Low-temperature baking conditions]

Temperature : 40°C±5°C

Humidity : Less than 25%RH

Time : 192 hours

Number of times : 1 time

# Caution for Safety

 **DANGER**

## ■ This product contains Gallium Arsenide (GaAs).

GaAs powder and vapor are hazardous to human health if inhaled or ingested. Do not burn, destroy, cut, cleave off, or chemically dissolve the product. Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.

### Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book. Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.

Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.