


## TYPE NAS/NAH

### TERMINAL

### FOR COPPER CABLE

High copper alloy reversible cap terminal for joining a wide range of cable to equipment pads. Tongue is side formed to provide adequate clearance and terminal is designed for one-wrench installation.

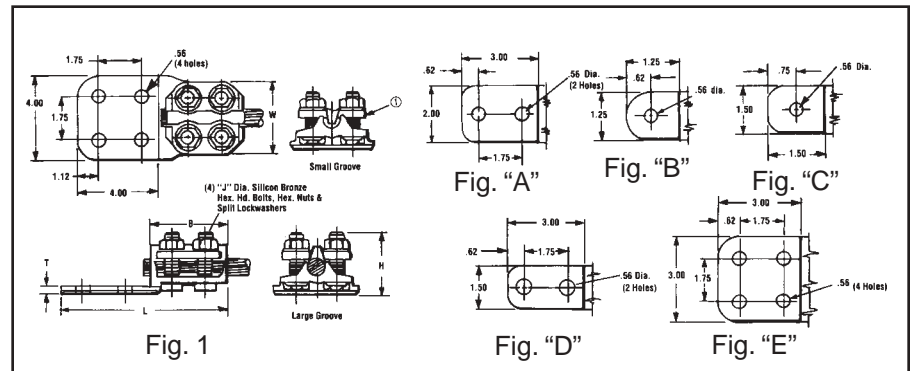

CATALOG NUMBER	FIG. NO.	COPPER CABLE RANGE			B	H	J DIA.	L	T	W
		COMPLETE CABLE RANGE	SMALL GROOVE	LARGE GROOVE						
NAS29-N	1B				2.38	1.80	3/8"-16	3.58		2.00
NAS29-2N	1D	6 Sol. (.162 Dia.) to 250 kcmil (.575 Dia.)	6 Sol. (.162 Dia.) to 1/0 Str. (.373 Dia.)	2/0 Str. (.419 Dia.) to 250 kcmil (.575 Dia.)	2.62	2.12	1/2"-13	5.88	.25	2.44
NAH29-2N	1D									
NAS29-34N	1E					1.80		5.62		2.00
NAS34-N	1C				2.38	2.05	3/8"-16	4.12		2.20
NAS34-2N	1A	1/0 Sol. (.325 Dia.) to 500 kcmil (.813 Dia.)	1/0 Sol. (.325 Dia.) to 4/0 Str. (.529 Dia.)	250 kcmil (.575 Dia.) to 500 kcmil (.813 Dia.)	2.62			2.38	1/2"-13	
NAH34-2N	1A									
NAS34-34N	1E				2.38	2.05	3/8"-16	5.62		2.20
NAH34-34N	1E					2.30	1/2"-13		.25	2.56
NAS40-2N	1A					2.30	3/8"-16			
NAH40-2N	1A					2.62	1/2"-13	5.88	.38	2.44
NAS40-34N	1E	2/0 Sol. (.365 Dia.) to 800 kcmil (1.031 Dia.)	2/0 Sol. (.365 Dia.) to 500 kcmil (.813 Dia.)	500 kcmil (.813 Dia.) to 800 kcmil (1.031 Dia.)	2.62	2.30	3/8"-16			
NAH40-34N	1E									
NAS40-44N	1					2.62	1/2"-13		.31	2.44
NAH40-44N	1					2.30	3/8"-16			
NAH44-2N	1A					2.62		6.88		2.81
NAH44-34N	1E	4/0 Str. (.528 Dia.) to 1000 kcmil (1.152 Dia.)	4/0 Str. (.528 Dia.) to 750 kcmil (.998 Dia.)	750 kcmil (.998 Dia.) to 1000 kcmil (1.152 Dia.)	2.88					
NAH44-44N	1								.44	2.88
NAH46-2N	1A	1000 kcmil (1.152 Dia.) to 1500 kcmil (1.412 Dia.)	—	1000 kcmil (1.152 Dia.) to 1500 kcmil (1.412 Dia.)	3.06	2.88	1/2"-13	6.12		
NAH46-34N	1E							7.12	.31	
NAH46-44N	1							6.31	.50	.41
NAH48-2N	1A					7.31	.38			
NAH48-34N	1E	500 kcmil (.813 Dia.) to 2000 kcmil (1.632 Dia.)	500 kcmil (.813 Dia.) to 1500 kcmil (1.412 Dia.)	1500 kcmil (1.412 Dia.) to 2000 kcmil (1.632 Dia.)	3.25	3.12		6.50	.69	3.38
NAH48-44N	1							7.50	.44	