


P2 Relay V23079

- Standard telecom relay (ringing and test access)
- Slim line 15x7.5mm (.590x.295")
- Max. Switching current 2A
- 2 form C bifurcated contacts (2 changeover contacts, 2 CO)
- Immersion cleanable
- High sensitivity for low power consumption 140mW/ 70mW

Typical applications

Communications equipment linecard application (ringing and test access), PABX, voice over IP, office equipment, measurement and control equipment, automotive equipment as CAN bus, keyless entry, speaker switch, medical equipment, consumer electronics, set top boxes, HiFi

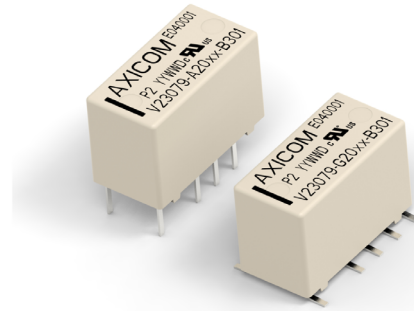

Approvals


UL61810-1 (former UL508) No. 214025

Technical data of approved types on request

Contact Data

Contact arrangement	2 form C (CO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current, 85°C	2A
Switching Power	60W, 62.5VA
Contact material	AgNi, gold-covered
Contact style	bifurcated contact
Minimum switching voltage	100µV
Thermoelectrical potential	<10µV
Initial contact resistance	<50mΩ at 10mA, 20mV
Frequency of operation, without load	50 operations/s
Operate time	typ. 2ms, max. 4ms
Set/reset time	typ. 2ms, max. 4ms
Release time	
without diode in parallel	typ. 2ms, max. 4ms
with diode in parallel	typ. 4ms, max. 6ms
Bounce time	typ. 1ms, max. 3ms
Electrical endurance	
at 12V / 10mA	typ. 5x10 ⁷ operations
at 6V / 100mA	typ. 1x10 ⁷ operations
at 60V / 500mA	typ. 5x10 ⁵ operations
at 30V / 1000mA	typ. 1x10 ⁶ operations
at 30V / 2000mA	typ. 2x10 ⁵ operations
at 12V / 5000mA / 25°C	typ. 1x10 ⁵ operations
Contact ratings, UL	110VDC / 0.3A - 33W 30VDC / 2.0A - 60W 120VAC / 0.5A - 60VA 240VAC / 0.25A - 60VA 125VAC / 1A NO Side 125VDC / 0.5A NO Side
Mechanical endurance	typ. 10x10 ⁶ operations

Coil Data

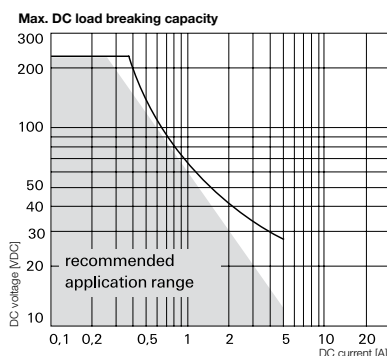


Magnetic system	polarized
Coil voltage range	2 to 24VDC
Max. coil temperature	105°C
Thermal resistance	< 125K/W

Coil versions, monostable

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.50	0.30	64	140
016	4.00	3.00	8.70	0.40	114	140
011	4.50	3.38	9.80	0.45	145	140
001	5.00	3.75	10.90	0.50	178	140
002	6.00	4.50	13.00	0.60	257	140
006	9.00	6.75	19.60	0.90	578	140
003	12.00	9.00	26.15	1.20	1029	140
005	24.00	18.00	52.30	2.40	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

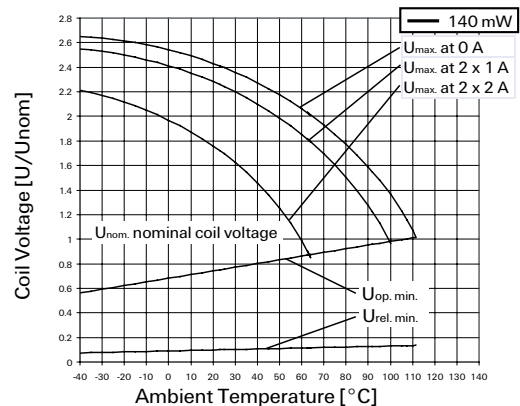

P2 Relay V23079 (Continued)

Coil Data (continued)


Coil versions, bistable

Coil code	Rated voltage VDC	Set voltage VDC	Limiting Voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
Bistable, 1 coil						
108	3.00	2.25	9.2	-2.25	128	70
111	4.50	3.38	13.85	-3.38	289	70
101	5.00	3.75	15.33	-3.75	357	70
102	6.00	4.50	18.5	-4.50	514	70
106	9.00	6.75	27.75	-6.75	1157	70
103	12.00	9.00	37	-9.00	2057	70
105	24.00	18.00	74	-18.00	8228	70

Bistable, 2 coil

219	2.00	1.50	4.33	1.50	28	140
218	2.40	1.80	5.2	1.80	41	140
208	3.00	2.25	6.5	2.25	64	140
211	4.50	3.38	9.8	3.38	145	140
201	5.00	3.75	10.9	3.75	178	140
202	6.00	4.50	13	4.50	257	140
206	9.00	6.75	19.6	6.75	578	140
203	12.00	9.00	26.15	9.00	1029	140
205	24.00	18.00	52.3	18.00	4114	140


All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

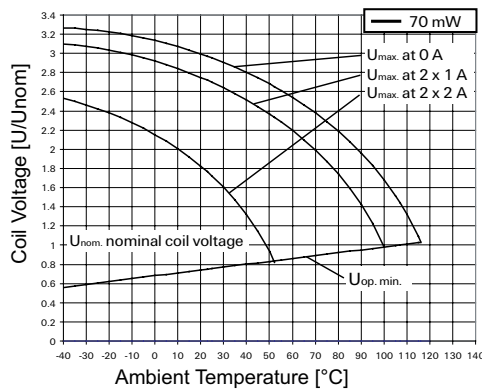

Coil versions, high dielectric version, monostable, overmolded

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release Voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
008	3.00	2.25	6.1	0.30	45	200
001	5.00	3.75	10.1	0.50	125	200
002	6.00	4.50	12.1	0.60	180	200
006	9.00	6.75	18.2	0.90	405	200
003	12.00	9.00	24.2	1.20	720	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

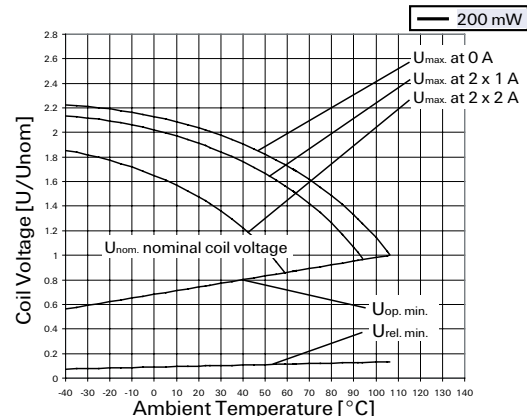

Insulation Data

	Standard	HDV
Initial dielectric strength		
between open contacts	1000V _{rms}	1500V _{rms}
between contact and coil	1500V _{rms}	1500V _{rms}
between adjacent contacts	1000 V _{rms}	1500V _{rms}
Initial surge withstand voltage		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
Initial insulation resistance at 500 Vdc	> 10 ⁹ Ω	
Capacitance		
between open contacts		max. 1pF
between contact and coil		max. 2pF
between adjacent contacts		max. 1.5pF
Clearance /creepage	1.3/2.5mm	

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter


Ambient temperature	-40 to +85°C
Category of environmental protection	
IEC 61810	RT III - wash tight
Vibration resistance (functional)	35g, 10 to 1000Hz
Shock resistance (functional)	
IEC 60068-2-27 (half sine)	100g
Terminal type	PCB-THT, SMT long and short terminals
Weight	max. 2.8 g
Resistance to soldering heat THT	
IEC 60068-2-20	265°C/10s
Moisture sensitive level, JEDEC J-Std-020E	MSL3
Related to SMT relays and THT relays packed in reel	
Ultrasonic cleaning	not recommended
Packaging/unit	
THT	tubes/2000 pcs.
THT	reel/1500 pcs.
SMT	reel/2000 pcs. or 2500 pcs.

P2 Relay V23079 (Continued)

Terminal assignment


TOP view on component side of PCB

Monostable version




ECR0912-C

Bistable version, 1-coil



ECR0912-C

Bistable version, 2-coils




ECR0913-K

Contacts are shown in reset condition.
Both coils can be used as either set or reset coils.
Contact position might change during transportation and must be reset before use.

PCB layout


TOP view on component side of PCB

THT version

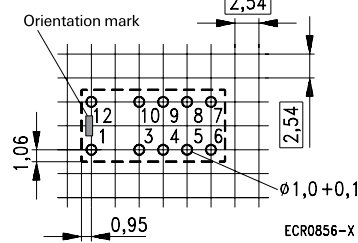


ECR0856-X

SMT, long terminals




P2 SMT L Layout

SMT, short terminals




Dimensions


Overmolded coil, high dielectric version
THT version



SMT, long terminals

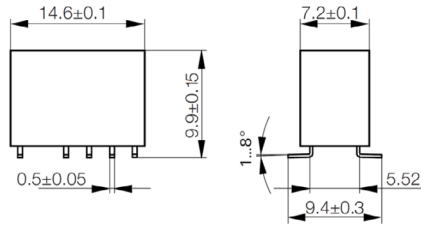

SMT, short terminals

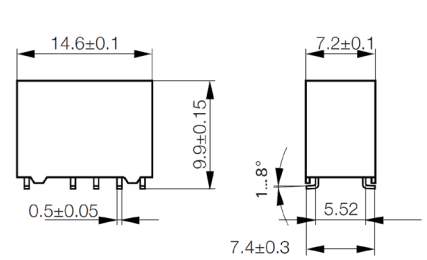

Downloaded from Arrow.com.

P2 Relay V23079 (Continued)

Product code structure

Typical product code **V23079 A 2 001 B 301**

Type V23079 Signal Relay P2 Series																				
Version <table><tr><td>A</td><td>THT, monostable</td><td>D</td><td>SMT, monostable, long term.</td><td>G</td><td>SMT, monostable, short term.</td></tr><tr><td>B</td><td>THT, latching, 2 coils</td><td>E</td><td>SMT, latching, 2 coils long term.</td><td>H</td><td>SMT, latching, 2 coils short term.</td></tr><tr><td>C</td><td>THT, latching, 1 coil</td><td>F</td><td>SMT, latching, 1 coil long term.</td><td>J</td><td>SMT, latching, 1 coil short term.</td></tr></table>			A	THT, monostable	D	SMT, monostable, long term.	G	SMT, monostable, short term.	B	THT, latching, 2 coils	E	SMT, latching, 2 coils long term.	H	SMT, latching, 2 coils short term.	C	THT, latching, 1 coil	F	SMT, latching, 1 coil long term.	J	SMT, latching, 1 coil short term.
A	THT, monostable	D	SMT, monostable, long term.	G	SMT, monostable, short term.															
B	THT, latching, 2 coils	E	SMT, latching, 2 coils long term.	H	SMT, latching, 2 coils short term.															
C	THT, latching, 1 coil	F	SMT, latching, 1 coil long term.	J	SMT, latching, 1 coil short term.															
Coil design <table><tr><td>2</td><td>Overmolded coil</td></tr><tr><td>1</td><td>Overmolded coil (not available for new design)</td></tr></table>			2	Overmolded coil	1	Overmolded coil (not available for new design)														
2	Overmolded coil																			
1	Overmolded coil (not available for new design)																			
Coil Coil code: please refer to coil versions table																				
Version <table><tr><td>B</td><td>Standard version</td></tr><tr><td>X</td><td>Special version (High dielectric, THT packed in reel)</td></tr></table>			B	Standard version	X	Special version (High dielectric, THT packed in reel)														
B	Standard version																			
X	Special version (High dielectric, THT packed in reel)																			
Contacts for standard versions <table><tr><td>301</td><td>2 form C contacts (2 CO), AgNi +Au</td></tr></table>			301	2 form C contacts (2 CO), AgNi +Au																
301	2 form C contacts (2 CO), AgNi +Au																			
Contacts for dielectric versions <table><tr><td>07*</td><td>2 form C contacts (2 CO), AgNi +Au</td></tr></table>			07*	2 form C contacts (2 CO), AgNi +Au																
07*	2 form C contacts (2 CO), AgNi +Au																			
Packing <table><tr><td>X1**</td><td>THT version packed in reel</td></tr></table>			X1**	THT version packed in reel																
X1**	THT version packed in reel																			

* any digit

Product code	Version	Coil design	Coil type	Coil voltage	Part number		
V23079-A2008-B301	THT	Overmolded	Monostable	3VDC	6-1419120-6		
V23079-A2011-B301				4.5VDC	3-1393789-9		
V23079-A2001-B301				5VDC	3-1393789-5		
V23079-A2002-B301				6VDC	3-1393789-6		
V23079-A2006-B301				9VDC	3-1393789-8		
V23079-A2003-B301				12VDC	3-1393789-7		
V23079-A2005-B301				24V	1-1422025-0		
V23079-A2016-B301				4V	1393790-3		
V23079-B2219-B301				2VDC	1-1422002-2		
V23079-B2218-B301				2.4VDC	1-1422002-1		
V23079-B2208-B301	SMT, long pins	Overmolded	Monostable	3VDC	1-1422002-0		
V23079-B2201-B301				5VDC	1422002-9		
V23079-B2211-B301				4.5VDC	1-1422002-7		
V23079-D2008-B301				3VDC	4-1393789-7		
V23079-D2011-B301				4.5VDC	4-1393789-8		
V23079-D2001-B301				5VDC	4-1393789-3		
V23079-D2002-B301				6VDC	4-1393789-4		
V23079-D2006-B301				9VDC	4-1393789-6		
V23079-D2003-B301				12VDC	4-1393789-5		
V23079-D2016-B301				SMT, long pins	Overmolded	Bistable, 2 coils	4VDC
V23079-E2219-B301	2VDC	1422007-6					
V23079-E2201-B301	Monostable	5VDC	1422007-7				
V23079-E2206-B301		9VDC	6-1422008-9				
V23079-E2208-B301		3VDC	1422007-8				
V23079-E2218-B301		2.4VDC	1422007-9				
V23079-E2211-B301		4.5V	1-1422007-6				
V23079-G2008-B301		SMT, short pins	Monostable			3VDC	5-1393789-4
V23079-G2016-B301	4VDC					1393790-5	
V23079-G2011-B301	4.5VDC					5-1393789-5	
V23079-G2001-B301	5VDC			4-1393789-9			
V23079-G2002-B301	6VDC			5-1393789-0			
V23079-G2006-B301	9VDC			5-1393789-3			
V23079-G2003-B301	12VDC			5-1393789-1			
V23079-G2008-X079	High dielectric Overmolded			3VDC	1422006-5		
V23079-G2001-X071				5VDC	1422006-1		
V23079-G2002-X072				6VDC	1422006-2		
V23079-G2006-X073		9VDC	1422006-3				
V23079-G2003-X074		12VDC	1422006-4				
V23079-A2003-X074		THT	Overmolded	12VDC	1422025-7		
V23079-A2008-X079				3VDC	1-1422025-1		
V23079-A2008-X101				3VDC	6-1419170-9		
V23079-A2011-X102				4.5VDC	3-1393790-1		
V23079-A2001-X103				5VDC	3-1393790-2		
V23079-A2002-X104	6VDC			3-1393790-3			
V23079-A2006-X105	9VDC			3-1393790-4			
V23079-A2003-X106	12VDC			3-1393790-5			
V23079-B2219-X107	THT packed in reel			Overmolded	Bistable, 2 coils	2VDC	1-1422003-0
V23079-B2218-X108						2.4VDC	1-1422003-1
V23079-B2208-X109		Monostable	3VDC		1-1422003-2		
V23079-B2201-X110			5VDC		1422003-3		

Note:

1. Not shown part numbers upon request.
2. All product with coil design 1 produced before 01/2023 contain the old standard coil design.