


- Ultra low profile receptacles sit only 0,46 to 0,79 high above the board.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 3-finger #11 BeCu contact is rated at 3 amps. See page 206 for details.
- Uses M-M #0552-1, 0552-2 or 0442-0 receptacles. See pages 126 & 127 for details.

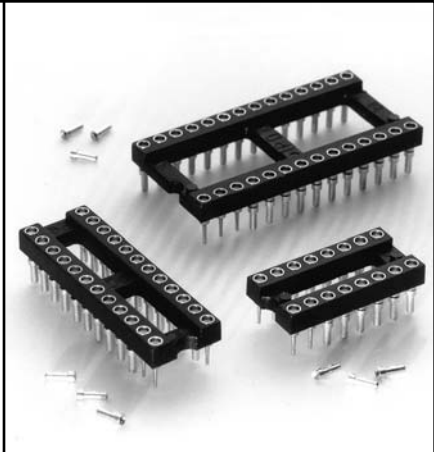

Total number of pins				Quantity per tube	Ordering Information <i>For RoHS compliance, select \diamond plating code. For the all gold option (XX=13) also change part number from 614-XX-XXX-31-0XX000 to 614-13-XXX-31-0XX100</i>				
	A	B	C		Length = 3,45 (1,0 Min. Mounting Hole)	Length = 3,45 (1,0 Min. Mounting Hole)	Length = 4,32 (1,0 Min. Mounting Hole)		
					13 \diamond	93	99	43 \diamond	44 \diamond
10	12,6	5,08	7,6	40	614-XX-210-31-012000	614-XX-210-31-002000	614-XX-210-31-018000		
4	5,0	7,62	10,1	102	614-XX-304-31-012000	614-XX-304-31-002000	614-XX-304-31-018000		
6	7,6	7,62	10,1	67	614-XX-306-31-012000	614-XX-306-31-002000	614-XX-306-31-018000		
8	10,1	7,62	10,1	50	614-XX-308-31-012000	614-XX-308-31-002000	614-XX-308-31-018000		
10	12,6	7,62	10,1	40	614-XX-310-31-012000	614-XX-310-31-002000	614-XX-310-31-018000		
14	17,7	7,62	10,1	28	614-XX-314-31-012000	614-XX-314-31-002000	614-XX-314-31-018000		
16	20,3	7,62	10,1	25	614-XX-316-31-012000	614-XX-316-31-002000	614-XX-316-31-018000		
18	22,8	7,62	10,1	22	614-XX-318-31-012000	614-XX-318-31-002000	614-XX-318-31-018000		
20	25,3	7,62	10,1	20	614-XX-320-31-012000	614-XX-320-31-002000	614-XX-320-31-018000		
22	27,8	7,62	10,1	18	614-XX-322-31-012000	614-XX-322-31-002000	614-XX-322-31-018000		
24	30,4	7,62	10,1	16	614-XX-324-31-012000	614-XX-324-31-002000	614-XX-324-31-018000		
28	35,5	7,62	10,1	14	614-XX-328-31-012000	614-XX-328-31-002000	614-XX-328-31-018000		
20	25,4	10,16	12,7	20	614-XX-420-31-012000	614-XX-420-31-002000	614-XX-420-31-018000		
22	27,8	10,16	12,7	18	614-XX-422-31-012000	614-XX-422-31-002000	614-XX-422-31-018000		
24	30,4	10,16	12,7	16	614-XX-424-31-012000	614-XX-424-31-002000	614-XX-424-31-018000		
28	35,5	10,16	12,7	14	614-XX-428-31-012000	614-XX-428-31-002000	614-XX-428-31-018000		
32	40,6	10,16	12,7	12	614-XX-432-31-012000	614-XX-432-31-002000	614-XX-432-31-018000		
24	30,5	15,24	17,7	16	614-XX-624-31-012000	614-XX-624-31-002000	614-XX-624-31-018000		
28	35,5	15,24	17,7	14	614-XX-628-31-012000	614-XX-628-31-002000	614-XX-628-31-018000		
32	40,6	15,24	17,7	12	614-XX-632-31-012000	614-XX-632-31-002000	614-XX-632-31-018000		
36	45,7	15,24	17,7	11	614-XX-636-31-012000	614-XX-636-31-002000	614-XX-636-31-018000		
40	50,8	15,24	17,7	10	614-XX-640-31-012000	614-XX-640-31-002000	614-XX-640-31-018000		
42	53,3	15,24	17,7	9	614-XX-642-31-012000	614-XX-642-31-002000	614-XX-642-31-018000		
48	60,9	15,24	17,7	8	614-XX-648-31-012000	614-XX-648-31-002000	614-XX-648-31-018000		
50	63,5	15,24	17,7	8	614-XX-650-31-012000	614-XX-650-31-002000	614-XX-650-31-018000		
52	66,0	15,24	17,7	7	614-XX-652-31-012000	614-XX-652-31-002000	614-XX-652-31-018000		
50	63,5	22,86	25,3	8	614-XX-950-31-012000	614-XX-950-31-002000	614-XX-950-31-018000		
52	66,0	22,86	25,3	7	614-XX-952-31-012000	614-XX-952-31-002000	614-XX-952-31-018000		
64	81,2	22,86	25,3	6	614-XX-964-31-012000	614-XX-964-31-002000	614-XX-964-31-018000		
SPECIFY PLATING CODE XX=									
Sleeve (Pin)				0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	5,08µm Sn
Contact (Clip)				0,76µm Au	0,76µm Au	5,08µm Sn/Pb		0,76µm Au	5,08µm Sn