

12 Gbps SAS/SATA Protocol Controller Family

8/16-Port SPCv and SPCve Controllers

Summary

Microchip's SPCve and SPCv are part of the highly-integrated 12G SAS and 3G/6G/12G SATA protocol controller family optimized for fabric-attached RAID storage system applications and SAS/SATA HBA applications. This controller family significantly increases total system performance, diagnostics, scalability and manageability.



The SPCve and SPCv controllers each provide an efficient and scalable architecture that enables industry-leading system performance. They provide application-programming environments that are compatible with other members of the Tachyon® SAS/SATA controller family and Tachyon Fibre Channel controllers, enabling software leverage between controllers and protocols.

The controllers provide system designers with end-to-end diagnostics and error handling mechanisms to increase system performance, availability and most importantly, manageability. Unique end-to-end features and algorithms can be achieved from host to Hard Disk Drive (HDD) or Solid-State Drive (SSD) by using these controllers in combination with market-leading SAS/SATA expanders, multiplexers and enclosure management solutions.

Features


Support

- Support for up to 4K SAS addresses
- Support for up to 8K outstanding I/Os
- Wide target mode support enables high-performance, front-end SAS applications or can be used for host-host failover coordination
- Support for wide-port initiator and wide-port target modes
- Hardware assist support for error recovery
- Verification, insertion and replacement of T10 Data Integrity Fields (DIF) as defined by SBC-2

Highlights

- Enterprise-class system performance, availability and manageability
- End-to-end system diagnostics and error handling mechanisms from host to HDD
- Enables cost-effective secure data SAS/SATA encryption solution across both HDD and SSD devices
- FIPS 140-2 Level 3-certifiable solution meets the most stringent data security requirements

RAID Controller Card Application Diagram

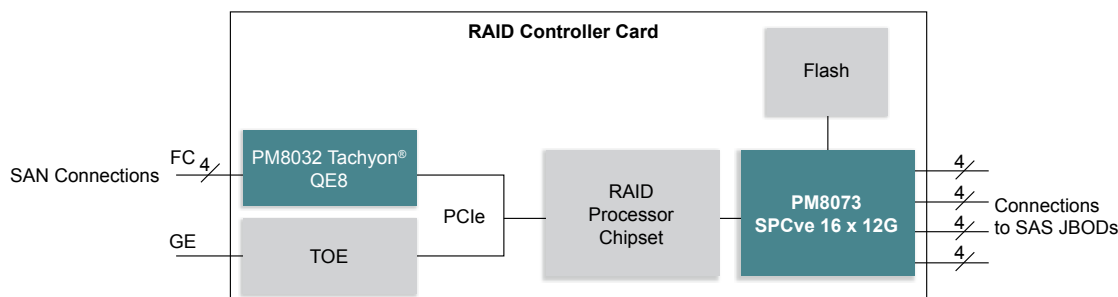

Encryption

- IEEE 1619-compliant line rate AES-XTS for data at rest encryption
- 256-bit key size supported
- FIPS 140-2, Levels 1–3 certifiable
- Secure Key Encryption Key (KEK) management
- Support for 4M Data Encryption Keys (DEKs) and eight KEKs
- KMIP-compliant key blob support

SAS/SATA

- SAS initiator, SAS target, or SATA HBA operation on a per-PHY basis
- SSP, SMP, STP and direct-attached SATA protocol support
- A single SAS PHY supports up to 1.2 GB/s of bandwidth
- Initiator and target mode configurable on a per-PHY basis
- Hot-plug and SATA NCQ support
- SAS 2.1 optical support

PCI Express (PCIe)

- Eight-lane native PCIe-compliant 2.5 Gbps (PCIe 1.1), 5 Gbps (PCIe 2.0) and 8 Gbps PHYs (PCIe 3.0)

Support for Statistics and Performance Monitoring

- Enhanced SAS error monitoring and fault isolation
- SAS topology monitoring and fault determination

High-Speed I/O

- Independent per-channel, selectable high-speed outputs support multiple programmable levels of pre-emphasis and output swing
- Independent per-channel, selectable high-speed inputs support multiple programmable levels of receive equalization
- Integrated resistive termination
- Automatic negotiation of link speed
- Decision feedback equalizer provides robust recovery of 12 Gbps SAS signals over lossy channels

T10 DIF

- Verification, insertion and replacement of T10 DIF as defined by SBC-2

Test and Control

- Power and reset control

Configurable Peripheral Interfaces

- Interfaces for NOR Flash memory and SEEPRO
- Four Two-Wire Interfaces (TWIs) support variable rates up to 400 kHz
- Two industry-standard 16750 UARTs
- Four SFF-8485-compliant Serial GPIO (SGPIO) ports
- 16 customer-configurable GPIO pins

Physical

- 27 mm × 27 mm 1071-pin FCBGA

Applications

- External RAID storage systems
- Host bus adapters and servers

Ordering Information

Order Number*	Format	Ports
PM8073B1-F3EI	SPCve	16
PM8071B1-F3EI	SPCve	8
PM8072B1-F3EI	SPCv	16
PM8070B1-F3EI	SPCv	8

*B1: Revision number; F3: package descriptor; E: Pb-free; I: industrial temperature.

More Information

<https://www.microsemi.com/product-directory/sas-sata-i-o-controllers/4040-12g-sas-sata-i-o-controllers-storage#overview>

The Microchip name and logo, the Microchip logo and Tachyon are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.
© 2019, Microchip Technology Incorporated. All Rights Reserved. 4/19

DS00003037A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[PM8072B1-F3EI](#) [PM8071B1-F3EI](#) [PM8070B1-F3EI](#)