


L 252 900 11 P.C.B. connectors

► Expert Range



Male socket.

Vertical closed double deck sockets without offset.



Plug
RECTANGULAR SHAPE

Pin 0.8 x 0.8 x 3.5 mm
.031" x .031" x .138"

P.C.B. thickness ≤ 2.4 mm .094"

P.C.B. holes Ø 1.2 mm .047"

Body : UL94 V0 - PA

Grey

Spacing 3.5 mm .138"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
4	0.0018	50	8.7	1SSA 252 904 R1100
6	0.0027	50	12.2	1SSA 252 906 R1100
8	0.0036	50	15.7	1SSA 252 908 R1100
10	0.0045	50	19.2	1SSA 252 910 R1100
12	0.0054	50	22.7	1SSA 252 912 R1100

Other numbers of poles, consult us

Technical data

	IEC	UL	CSA
Wire size			
Screw			
Solid wire			
Stranded wire			
With ferrule			
Rated voltage	160 V		
Rated current	8 A		
Short-circuit current			
Rated wire size / Gauge			
Storage temperature range	-20 ~ +80 °C		
Insulation resistance	≥ 10 ⁹ Ω		
Wire stripping length			
Recommended screwdriver			
Recommended torque			
Protection	IP 20 / NEMA 1		


CE

Accessories


Rep.	Description	Type	Order code	Packaging	Weight kg
1	Coding peg		1SSA 299 084 R0600	50	0.0005

Other versions, please consult us :

Vertical closed double deck sockets without offset with flanges and inserts.



L 252 900 31

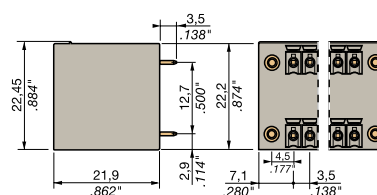


Socket L 252 900 11
compatible with :



L 242 200 01



Socket L 252 900 31
compatible with :



L 242 200 31