


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MINIMUM LENGTH	WEIGHT	FERRULE TYPE
F6D4-NM1	39.37 in. [1 meter]	.50 lb./10 pcs. (230.4g/10 pcs.)	CERAMIC
F6D4-NM2	78.74 in. [2 meters]	.82 lb./10 pcs. (372.8g/10 pcs.)	CERAMIC
F6D4-NM3	118.11 in. [3 meters]	1.13 lb./10 pcs. (515.2g/10 pcs.)	CERAMIC
F6D4-NM6	236.2 in. [6 meters]	2.07 lb./10 pcs. (942.4g/10 pcs.)	CERAMIC
F6D4-NM8	314.9 in. [8 meters]	2.70 lb./10 pcs. (1227.2g/10 pcs.)	CERAMIC
F6D4-NM10	393.7 in. [10 meters]	3.32 lb./10 pcs. (1512.0g/10 pcs.)	CERAMIC
F6D4-NM15	590.5 in. [15 meters]	4.89 lb./10 pcs. (2224.0g/10 pcs.)	CERAMIC

3mm ORANGE JACKETED
RISER RATED DUPLEX
FIBER OPTIC CABLE

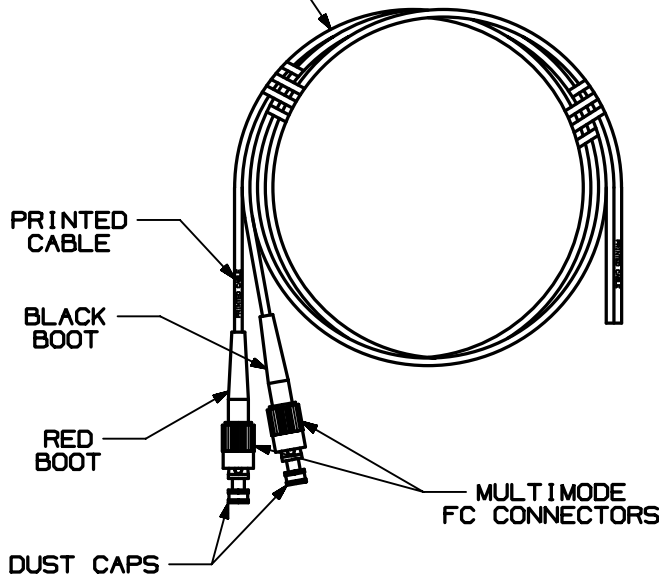

NOTES:

1. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
2. DUPLEX 3mm JACKETED MULTIMODE, 62.5/125μm GLASS OPTICAL FIBER, RISER RATED.
3. TERMINATED WITH FC CONNECTORS. ASSEMBLED WITH TEMPERATURE CURED EPOXY.
4. CABLE JACKET COLOR IS ORANGE.
5. THE MAXIMUM INSERTION LOSS PER CONNECTOR IS .35 dB.
6. DUST CAPS MAY VARY FROM ONES SHOWN.
7. ALL DIMENSIONS IN BRACKETS ARE METRIC.

CAD FILENAME/LAYERS		M01010DE_DC_00A.PRT	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
DUPLEX MULTIMODE FIBER OPTIC FC PIGTAIL (F6D4-NM SERIES) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY EFK	MAT'L:	SCALE NONE	DWG A
DATE 11-28-00	SEE NOTES	DRAWING NO. 01010-53	SIZE A
CHK'D			

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
R	11-28-00	EFK		RELEASED FOR PRODUCTION	01010-53			