
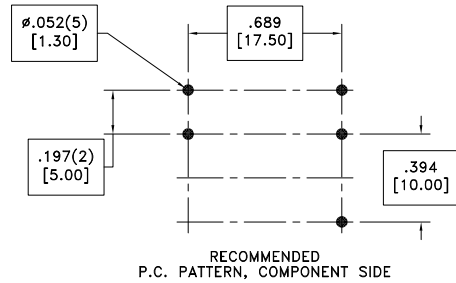



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

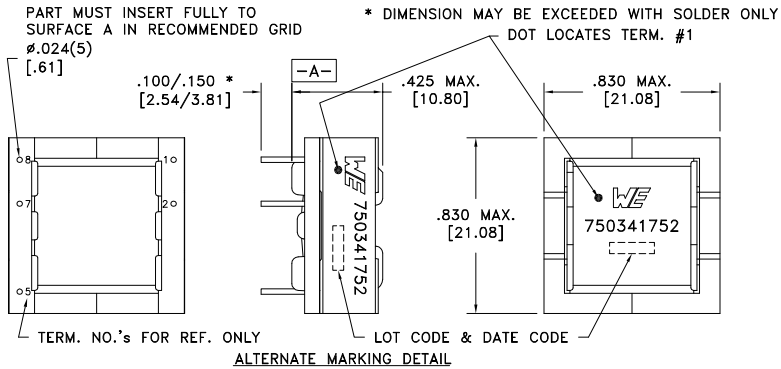

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	7-8 @20°C	0.70 ohms max.
D.C. RESISTANCE	2-1 @20°C	1.95 ohms max.
INDUCTANCE	7-8 10kHz, 1.0VAC, Ls	750uH $\pm 10\%$
LEAKAGE INDUCTANCE	7-8 tie(2+1), 100kHz, 100mVAC, Ls	20.0uH max.
DIELECTRIC	1-8 1250VAC, 1 second	1000VAC, 1 minute
URNS RATIO	(7-8):(2-1)	3.348:1, $\pm 2\%$

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0199 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13] Footprint: $\pm .001$ [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750341752
6A	9/13	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341752	SPECIFICATION SHEET 1 OF 1