

MV Series

14 DIP, 5.0 Volt, HCMOS/TTL, VCXO





This product is not recommended for new designs


- General purpose VCXO for Phase Lock Loops (PLLs), Clock Recovery, Reference Signal Tracking, and Synthesizers
- Frequencies up to 160 MHz
- Tri-state Option Available

Height "A" = 0.200 (5.08) Max. for Pull 1&2 < 25 MHz

Height "B" = 0.300 (7.62) Max. for Pull 1&2 > 25 MHz and all Pull 3

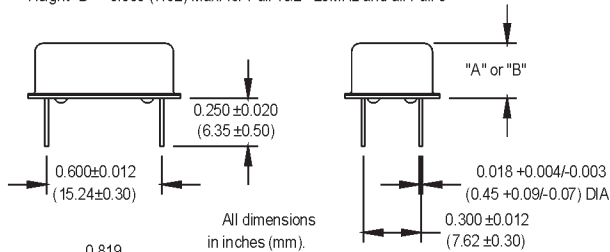

OPTIONAL 6-PIN PACKAGE WITH TRISTATE



Pin Connections

PIN	FUNCTION
1	Control Voltage
3	Tristate (6-Pin Pkg. Only)
7	Ground
8	Output
12	N/C (6-Pin Pkg. Only)
14	+Vdd

Ordering Information

Product Series	MV	1	3	V	2	C	D	-R	00.0000	MHz
Temperature Range	1: 0°C to +70°C		2: -40°C to +85°C							
Stability	1: ±1000 ppm		2: ±500 ppm		3: ±100 ppm					
	4: ±50 ppm		5: ±35 ppm		6: ±25 ppm					
Output Type	V: Voltage Controlled		T: Tristate							
Pull Range (Vc = .5 to 4.5V)	1: ±50 ppm min.		2: ±100 ppm min.							
	3: ±200 ppm min. ("B" package only)									
Symmetry/Logic Compatibility	A: 40/60 CMOS/TTL		C: 45/55 HCMOS							
Package/Lead Configurations	D: DIP; Nickel Header		G: Gull Wing; Nickel Header							
RoHS Compliance	Blank: non-RoHS compliant part									
	-R: RoHS compliant part									
Frequency (customer specified)										

*Contact factory for availability
M3002Sxxx - Contact factory for datasheet.

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes	
Frequency Range	F	1.5		160	MHz	See Note 1	
Operating Temperature	T _A	(See Ordering Information)					
Storage Temperature	T _S	-55		125	°C		
Frequency Stability	ΔF/F	(See Ordering Information)					
Aging							
1st Year		-3/-5		+3/+5	ppm	< 52 MHz / ≥ 52 MHz	
Thereafter (per year)		-1/-2		+1/+2	ppm	< 52 MHz / ≥ 52 MHz	
Pullability		(See Ordering Information)					Over control voltage
Control Voltage	V _c	0.5	2.5	4.5	V		
Linearity				10	%	Positive Monotonic Slope	
Modulation Bandwidth	f _m	10			kHz		
Input Impedance	Z _{in}	50k			Ohms		
Input Voltage	V _{dd}	4.75	5	5.25	V		
Input Current	I _{dd}		25	40	mA	1.5 to 24.999 MHz	
			35	60	mA	25 to 69.999 MHz	
			55	90	mA	70 to 160 MHz	
Output Type						HCMOS/TTL	
Load						See Note 2	
						10 TTL or 50 pF	
						5 TTL or 15 pF	
Symmetry (Duty Cycle)		(See Ordering Information)					See Note 3
Logic "1" Level	V _{oh}	90% V _{dd}			V	HCMOS load	
	V _{dd} -0.5				V	TTL load	
Logic "0" Level	V _{ol}			10% V _{dd}	V	HCMOS load	
				0.5	V	TTL load	
Rise/Fall Time	T _r /T _f				ns	See Note 4	
1.5 to 54.999 MHz				6 / 10	ns	TTL/HCMOS	
55 to 160 MHz				1.5 / 5	ns	TTL/HCMOS	
Tri-state Function		Input Logic "1" or floating: output active					
		Input Logic "0": output disables to high-Z					
Start up Time				10	ms		
Phase Jitter	φ _J				ps RMS	Integrated 12 kHz - 20 MHz	
@ 38.88 MHz			0.3	1	ps RMS	Integrated 12 kHz - 20 MHz	
@ 155.52 MHz			10	15	ps RMS	Offset from carrier	
Phase Noise (Typical)					100 kHz		
@ 38.88 MHz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	Offset from carrier	
	-71	-104	-134	-151	-153		
@ 155.52 MHz	-62	-93	-113	-115	-114		

1. Frequencies above 90 MHz utilize a PLL design. Fundamental and PLL designs are available for other frequencies. Contact factory.
2. TTL load – see load circuit diagram #1. HCMOS load – see load circuit diagram #2
3. Symmetry is measured at 1.4 V with TTL load, and at 50% with HCMOS load.
4. Rise/Fall times are measured between 0.5 V and 2.4 V for TTL load, and between 10% V_{dd} and 90% V_{dd} for HCMOS load.
5. Maximum Wave Soldering Conditions: +260°C for 10 secs.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.