





JUNCTION HYBRID (STYLE 12 PACKAGE)

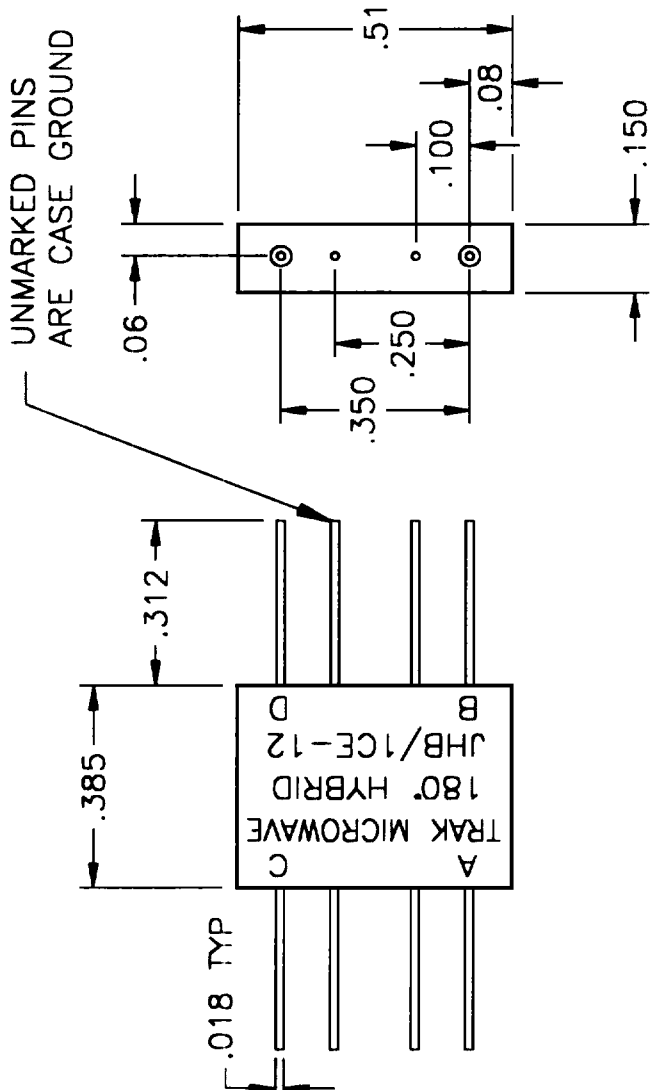


SPECIFICATIONS

- FREQUENCY : 50 - 500 MHz
- LOSS : 1.5 dB MAX
- VSWR : 1.5:1 MAX
- ISOLATION : 25 dB MIN
- AMPLITUDE BALANCE : 0.5 dB MAX
- PHASE BALANCE : 5.0° MAX
- POWER : 1 WATT
- IMPEDANCE : 50 OHMS


TYPICAL PERFORMANCE

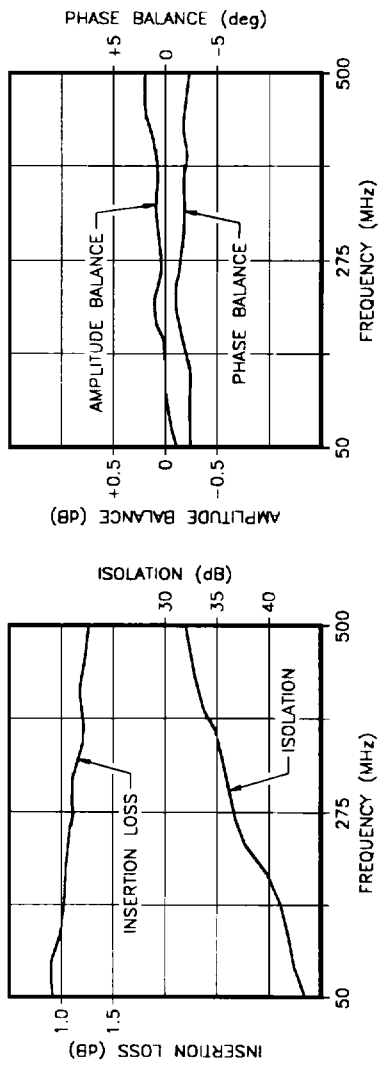

SCHEMATIC DIAGRAM



- | | | |
|--|-----------------|---|
| <input checked="" type="checkbox"/> STANDARD | <u>MATERIAL</u> | <input type="checkbox"/> HOUSING/PINS : KOVAR |
| <input type="checkbox"/> SPECIAL | | <input type="checkbox"/> COVER : KOVAR |
| | | <input type="checkbox"/> INSULATOR : GLASS |
| | | <input type="checkbox"/> MARKING : LASER |
| | | <input type="checkbox"/> FINISH : NICKEL |



TRAK MICROWAVE
 4726 Eisenhower Boulevard
 Tampa, Florida 33634
 (813)884-1411, FAX (813)886-2794

MODEL NO. JHB/1CE-12 SHT 1 OF 1 DATE 3/96