


C2323

REV
F



Product Description

Globespan Central Office - ADSL over POTS Transformer
1.41:1

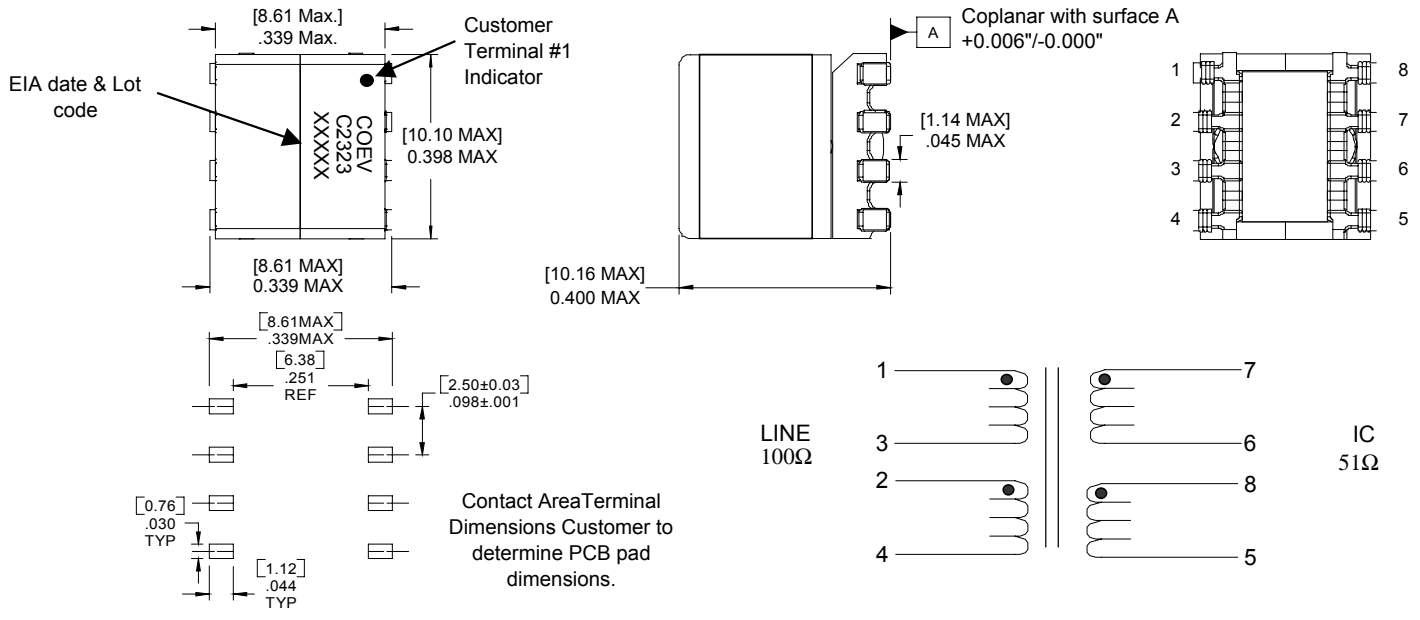

Information subject to change without notice. 11/02

Primary units are in inches. Millimeters are in brackets.

Electrical Specifications at +20°C unless noted otherwise

Test Description	Limit	Units	Tol	Notes
Inductance	474	μH	±5%	1-4 tie(2+3), 10kHz, 100mVAC, 0ADC, Ls.
Inductance	474	μH	±5%	1-4 tie(2+3), 10kHz, 100mVAC, 150mADC, Ls.
Leakage Inductance	10	μH	Max.	1-4 tie(2+3, 5+6+7+8), 100kHz, 100mVAC, Ls.
DC Resistance	1.10	Ω	Max.	7-6
DC Resistance	1.10	Ω	Max.	1-3
DC Resistance	1.10	Ω	Max.	2-4
DC Resistance	1.10	Ω	Max.	8-5
Turns Ratio	1.41 : 1.00	---	±2%	(1-3) : (7-8), 10KHz, 100mVAC.
Turns Ratio	1.00 : 1.00	---	±2%	(1-3) : (2-4), 10KHz, 100mVAC.
Turns Ratio	1.41 : 1.00	---	±2%	(1-4) : (8-6), 10KHz, 100mVAC.
Dielectric	1,850	VAC	500μA	1-7 tie(2+3, 6+8), 1 second test, 500μA maximum leakage current.
Total Harmonic Distortion	90	dB	Max.	100KHz, 12 Vp-p, Line : IC

Agency Approvals

BABT	Certificate No. NC/011396	Japan (via CB Cert.)	Certif. No. 12300
UL1950	File E189690	Austel (via CB Cert.)	Certif. No. 12300
CSA 950 (via UL/CUL)	File E189690	Sweden (via CB Cert.)	Certif. No. 12300
IEC 60950 (via CB Cert.)	Certificate No. 12300	Norway (via CB Cert.)	Certif. No. 12300

BABT

Patent Pending

The information contained in this drawing is the sole property of CoEv, Inc. Any reproduction or use without the written permission of CoEv, Inc. is prohibited.

TEL 888-978-2638 - FAX 605-886-8995 - Specifications subject to change without notice. For latest revision visit www.tycopowercomponents.com