


DELAY MODULES, TTL, SURFACE MOUNTED

14 PIN 5 TAPS

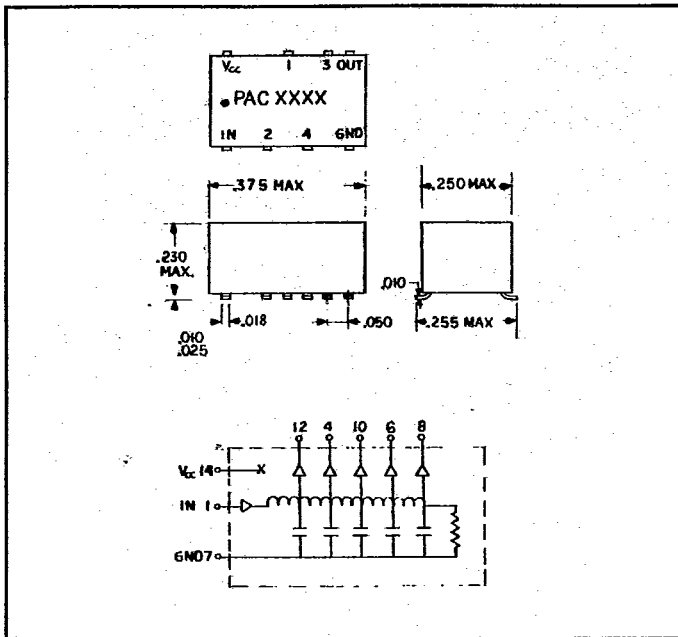

- TTL and DTL compatible
- No external components required
- Extremely Compact
- Surface Mounted

Part Number	Delay Time ^{1,3} ns	Number of Taps	Tap Delay ^{1,3} ns	Rise Time ² ns
4428	25	5	5	4
4429	30	5	6	4
4437	35	5	7	4
4438	40	5	8	4
4439	45	5	9	4
4431	50	5	10	4
4441	60	5	12	4
4440	75	5	15	4
4432	100	5	20	4
4443	125	5	25	4
4433	150	5	30	4
4434	200	5	40	4
4435	250	5	50	4

1. MEASURED AT 1.5V LEVEL ON THE LEADING EDGE
 2. MEASURED FROM 0.75V TO 2.4V
 3. TOLERANCE ±5% or ± 2ns which ever is greater

OPERATING SPECIFICATIONS

Vcc supply voltage: 4.75 to 5.25 VDC
 Logic 1 input: Voltage 2V min; 5.5V max. Current 2.4V = 50ua max. 5.5V = 1ma max.
 Logic 0 input: Voltage .8V max. Current -2ma max.
 Logic 1 Voltage out: 2.4V min.
 Logic 0 Voltage out: .4V max.
 Operating temperature range: 0° to 70°C
 Storage temperature: -55 to +125°C.

TEST CONDITIONS

Input pulse width: Minimum of 50% of Delay
 Input pulse rise time: 3ns
 Input pulse voltage: 3.2V
 Vcc supply voltage: 5.0 VDC
 Icc supply current: 40 ma typ.
 All measurements made at 25°C.

860 STATE ROAD PRINCETON, N.J. 08540
 (609) 924-2444

