# FLHTC0311-22-6 - ACTIVE

#### Raychem

TE Internal #: 0908913002 Hook Up Wire, FlexLite HT, 600V Voltage Rating, Blue Wire Color, 22AWG Wire Size, .33mm<sup>2</sup> Wire Size, Operating Temperature Range -65 – 200 °C

#### View on TE.com >

Wire & Cable > Hook Up Wire



Cable Type: FlexLite HT Voltage Rating: 600 V Wire Color: Blue Insulation Material: Radiation-Crosslinked, Modified ETFE Conductor Material: Tin-Plated Copper

#### Features

#### Product Type Features

Product Type

Product Classification

= TEconnectivity

Wire

Wire - Commercial

Cable Style	Primary, Stranded	
Cable Type	FlexLite HT	
Configuration Features		
Number of Conductors	1	
Number of Strands	19	
Electrical Characteristics		
Resistance (Max)	15.9 Ω/1000 ft @ 68°F	
Voltage Rating	600 V	
Body Features		
Weight	4.08 kg/km	
Wire Color	Blue	
Insulation Material	Radiation-Crosslinked, Modified ETFE	
Conductor Material	Tin-Plated Copper	
Dimensions		
Wire Diameter	1.08 mm[.0425 in]	

### FLHTC0311-22-6

Hook Up Wire, FlexLite HT, 600V Voltage Rating, Blue Wire Color, 22AWG Wire Size, . 33mm<sup>2</sup> Wire Size, Operating Temperature Range -65 – 200 °C



Overall Outside Diameter	1.37 mm[.054 in]	
Overall Outside Diameter Range	1.04 – 1.12 mm[.041 – .044 in]	
	22 AWG	
Conductor Diameter	.75 mm[.03 in]	
Cable Insulation Thickness	.152 mm[.006 in]	
Strand Size	34 AWG	
Wire Size	.33 mm²	
Usage Conditions		
Operating Temperature Range	-65 – 200 °C	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205)	

#### Halogen Content

Does not contain REACH SVHC

Out of Scope - excluded from Halogen requirements

Not applicable for solder process capability

#### Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**


#### FLHTC0311-22-6

Hook Up Wire, FlexLite HT, 600V Voltage Rating, Blue Wire Color, 22AWG Wire Size, . 33mm² Wire Size, Operating Temperature Range -65 – 200 °C



E TE
TE Model / Part # 650074-000 D-436-36

## Customers Also Bought

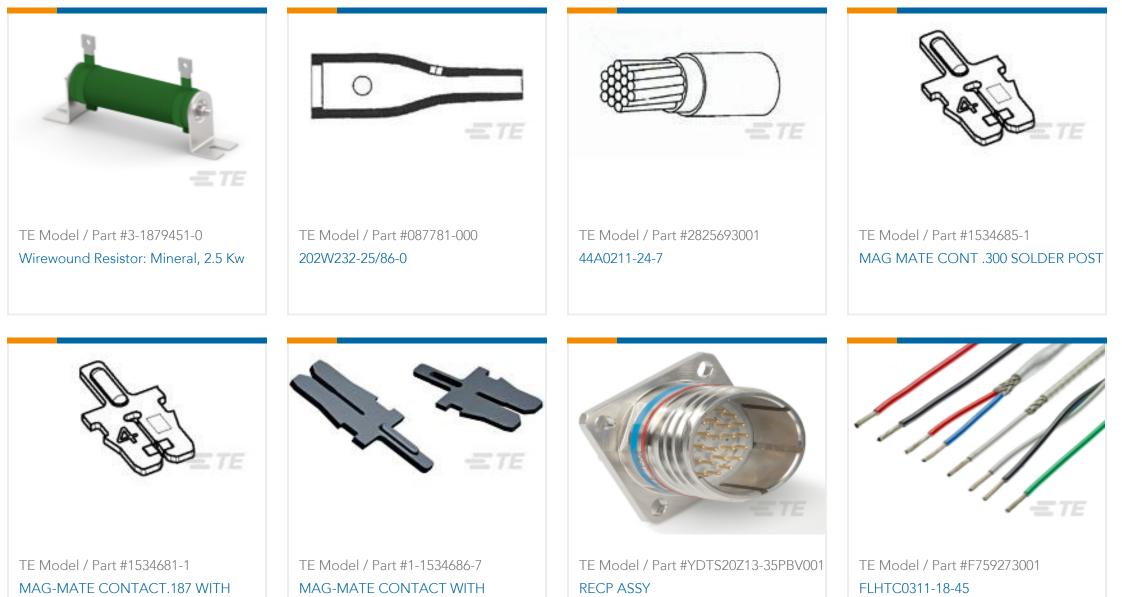

MAG-MATE CONTACT.187 WITH SOLDER PIN	MAG-MATE CONTACT WITH SOLDER PIN	RECP ASSY
ETE	A123461 A123462 A123456	
TE Model / Part #718574-000 FLHTC0311-22-1	TE Model / Part #9558384001 RNF-100-3/8-7-FSP	

#### Documents

Product Drawings FLHTC0311-22-6

English

Datasheets & Catalog Pages 1654025\_Sec9\_FlexLite

English

Wire and Cable Overview

English

### FLHTC0311-22-6

Hook Up Wire, FlexLite HT, 600V Voltage Rating, Blue Wire Color, 22AWG Wire Size, . 33mm² Wire Size, Operating Temperature Range -65 – 200 °C

