



DRAWING NO
C - 210735

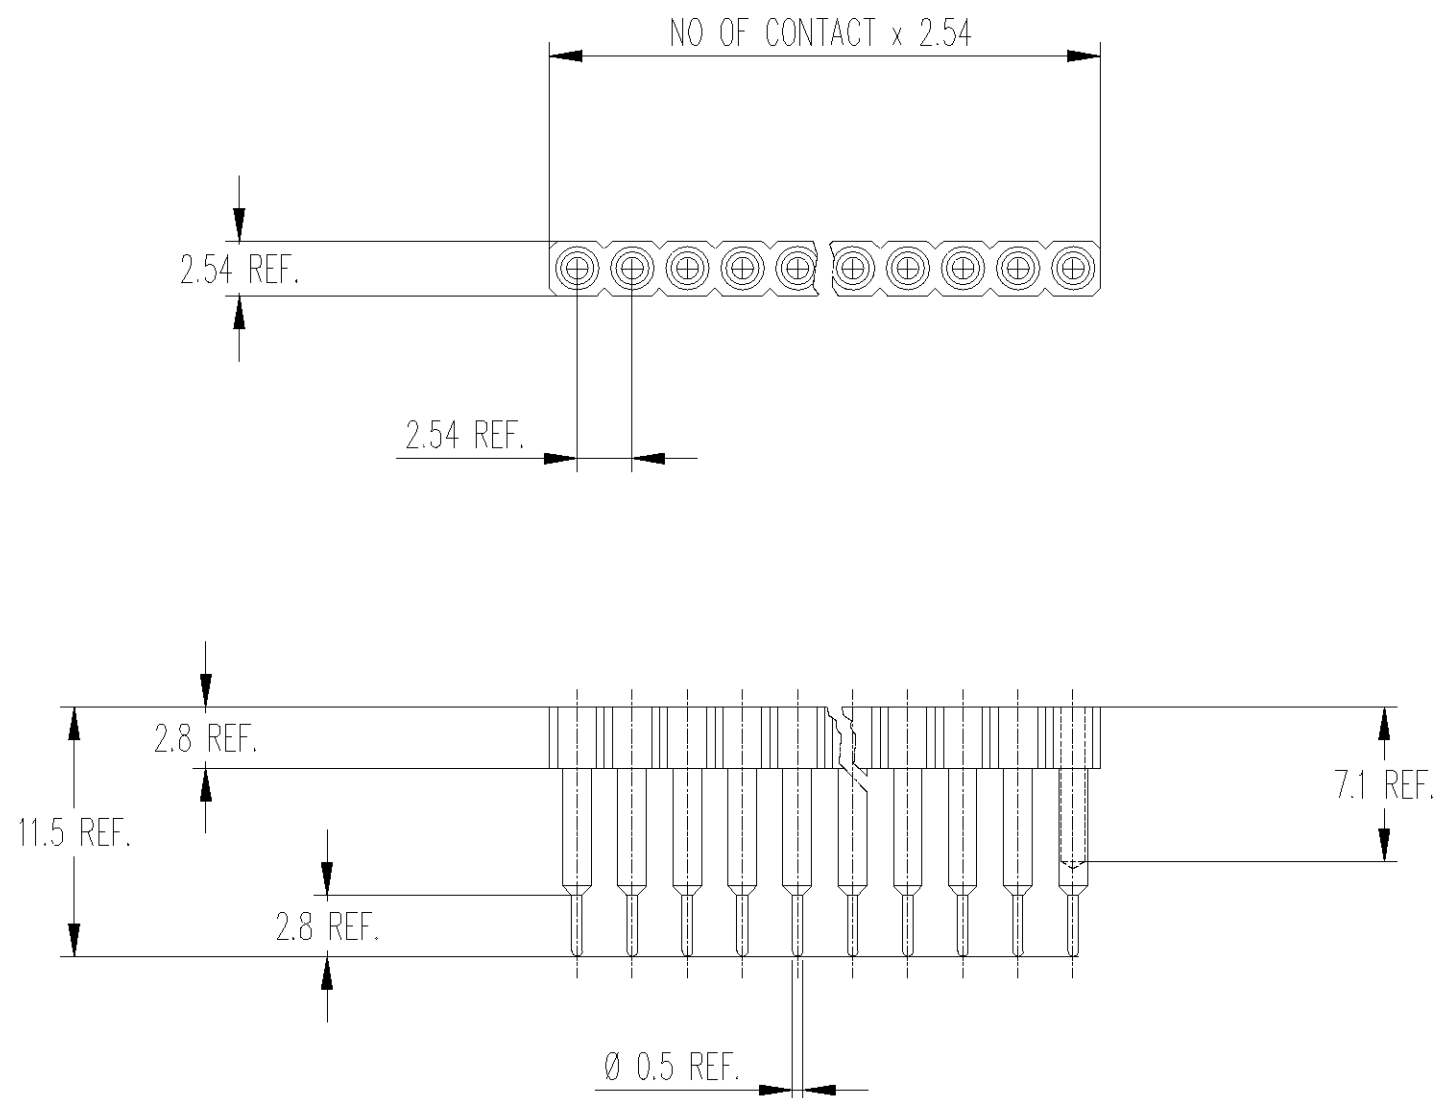

NOTE :

1. MATERIAL
 - INSULATOR : GLASSFILLED THERMOPLASTIC POLYESTER
 - SLEEVE : PHOSPHOR BRONZE
 - CLIP : STAMPED BERYLLIUM COPPER
2. PLATING
 - SLEEVE : 5µm Sn/Pb OVER 2-3µm Ni
 - CLIP : 5µm mini Sn/Pb
3. INNER SPRING CONTACT ACCEPT Ø 0.40 TO 0.56 OR RECTANGULAR PIN 0.25 x 0.45
4. MECHANICAL DATA WITH A Ø 0.43 TEST PIN :
 - INSERTION FORCE : 3.1N MAX.
 - EXTRACTION FORCE : 0.5N MIN.
 - MECHANICAL LIFE : 100 CYCLES MIN.
5. STANDARD NO OF CONTACTS : 20, 32, 56, AND 64

NUMBER OF CONTACTS DESIGNED BY PART
NUMBER DASH CODE -1 TO 6-.....-4
EXAMPLE : 2-210735-0, 20 CONTACTS

DIMENSIONS	mm							DRAWN S.CHANDEVAVLT	24 SEP 98	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FUTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM DSM SWITZERLAND.			
								CHECKED A. BOLIS	24 SEP 98				
SURFACE TEXTURE	N7 (✓)							APPROVED P.-A. MEIER	26 OCT 98				
CONCENTRICITY	0.15							CUSTOMER DRAWING FOR REFERENCE ONLY		NAME RECEPTACLE WITH ELEVATED PIN SIP IC SOCKET, BREAKABLE			
PRODUCT SPEC.		P	REV	ECN	DRWN	DATE	APVD						
 DSM DECOLLETAGE SA SAINT-MAURICE CH 1890 SAINT-MAURICE (VS)								LOC EK	SCALE 2/1	SIZE A4	DRAWING NO C - 210735	SHEET 1 of 1	REVISION 01

WAS 2002-xx-505-D-1

- [Home](#)
- [Part Number Search](#)
- [Document Search](#)
- [Text Search](#)
- [Alternate Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Lead Free Solutions](#)
- [Help/Glossary](#)

Current Brand View	View All Tyco Electronics Brands Click to activate links to all other products
AMP	

Sockets

SIP Sockets

AMP **210735-1** Active [Active](#)
(Tyco Electronics P/N: 210735-1)

[Search for Parts](#) | SPrevious [1] 2 3 4 [Next](#) N

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
<ul style="list-style-type: none"> General Info Sales Info Assembly Subcontractors 	<ul style="list-style-type: none"> Pricing Product Availability 	

Searchable Features:	
Brand:	AMP
No. of Positions:	1
Contact Style:	Screw Machine
Leg Style:	Standard
Contact Material:	Beryllium Copper
Contact Mating Area Plating:	Tin-Lead
Termination Post Length (mm [in]):	2.79 [0.110]
Sleeve Material:	Tin Lead

Other Properties:	
Housing Material:	Glass-Filled Thermoplastic Polyester
Breakaway Header:	Yes
Profile:	Raised