



- Shielded
- Single Port
- Thru Hole

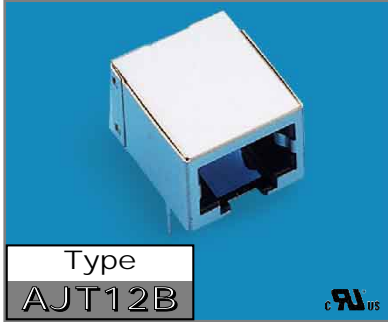

- Side Entry
- Super Low Profile
- Shield Ground Front
- 10 Positions

Type
AJT12B 

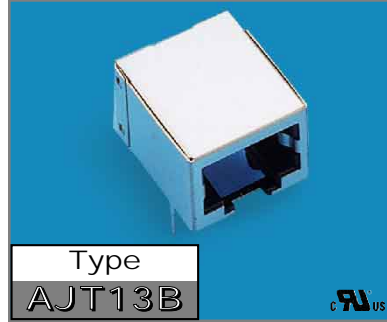


- Side Entry
- Super Low Profile
- Shield Ground Back
- 10 Positions

Type
AJT13B 


Technical Data

Housing: Glass filled Polyester UL94V-0
Standard color Black
Insert: Glass filled Polyester UL94V-0
Contact: 0.46mm Phosphor Bronze Gold plating over Nickel
or 0.35mm (0.014") thickness Phosphor Bronze Alloy, with selective Gold plating over Nickel over Tin
Shield: 0.25mm Brass Tin-Lead plated
For electrical specifications see page 4

Dimensions (mm)

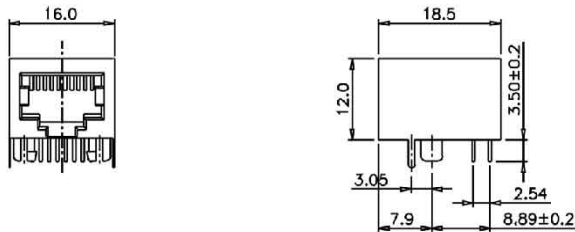

PC Board Layout



Ordering Information

A	J	T	1	2	B	A	A	1	3
Type	Style		Positions 10 (A)	Contacts 2, 4, 6, 8, 10 (A)	Ports	Plating 3=30u" 4=50u"			


Ports	Order No.
1	AJT12BAA13

Standard color: black


Technical Data

Housing: Glass filled Polyester UL94V-0
Standard color Black
Insert: Glass filled Polyester UL94V-0
Contact: 0.46mm Phosphor Bronze Gold plating over Nickel
or 0.35mm (0.014") thickness Phosphor Bronze Alloy, with selective Gold plating over Nickel over Tin
Shield: 0.25mm Brass Tin-Lead plated
For electrical specifications see page 4

Dimensions (mm)

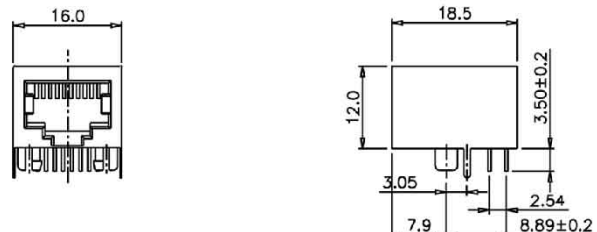

PC Board Layout



Ordering Information

A	J	T	1	3	B	A	A	1	3
Type	Style		Positions 10 (A)	Contacts 2, 4, 6, 8, 10 (A)	Ports	Plating 3=30u" 4=50u"			

Ports	Order No.
1	AJT13BAA13

Standard color: black