


Schematic

SPECIFICATIONS

Contact material: Phosphor bronze
 Contact resistance: 30 milliohms max.
 Terminal material: Brass/copper alloy
 Housing material: Thermoplastic, UL94V-0
 Insulation resistance: 100 megohms min.
 Withstanding: 500 VAC for 1 min.

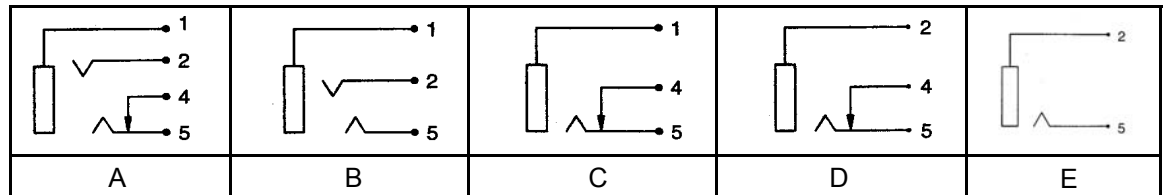

RoHS compliant

Series	Style	Bushing	Schematic	Bushing Plating	Terminal Plating	Housing Color	Options
CPJ	J330	XX	X	E	X	XX	XXX
Phone Jack	Ø3.5mm Vertical PCB Mount	P=Plastic PT=Threaded Plate	A-E (See diagram)	E=None	S=Silver (std) T=Tin G=Gold	BK=Black (std) Other color available	Blank=None HDR=w/ Round Nut HDH=w/ Hex Nut

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT, PN, Diag	04/22/10	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J330-XX-X-E-X-XX**

0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
UNIT: mm		

Description: Phone jack, ø3.5mm