


PARAMETER		UNITS
Primary Impedance	20	Ω
Secondary Impedance	2000	Ω
Longitudinal Balance 300 - 3500	TBD	dB
Primary DC Resistance	TBD	Ω Max.
Secondary DC Resistance	TBD	Ω Max.
Frequency Response 300 - 3500	TBD	dB
Insertion Loss	TBD@ 1kHz	dB
Isolation (HI-POT)	1000	V _{RMS}
Primary DC	None	
Total Harmonic Distortion 50 Min.	TBD	dB
Return Loss	TBD	dB


T-835

Audio Transformer


SCHEMATIC DIAGRAM:



**Physical Dimensions
in inches (mm)**

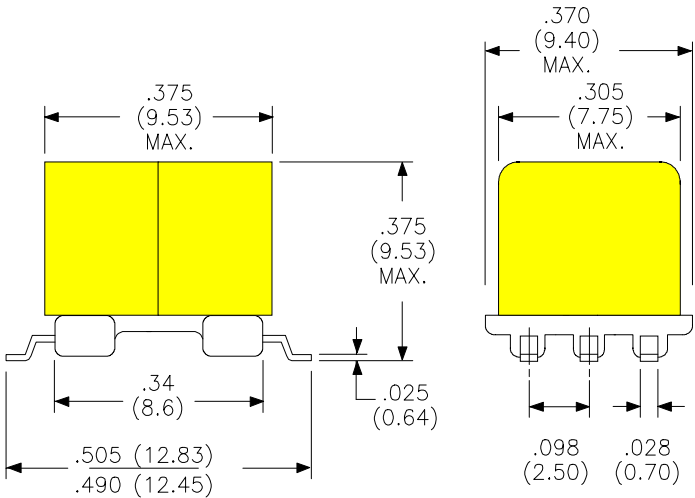

FOOTPRINT

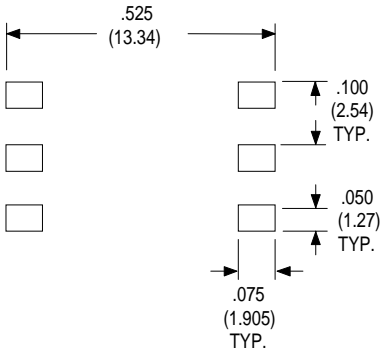

RHOMBUS INDUSTRIES INC.
FSCM NO. 16714

RHOMBUS P/N: T-835

CUST P/N:

NAME:

DATE: 2/3/97

SHEET: 1 OF 1