

PX-2

研發部





Ordering Information:

8111- $\frac{**}{1} \frac{*}{2}$ A B 0

- No. of Contacts
32= 32 Contacts
- Plating:
T= Tin plated 120 μ " over 30~50 μ " nickel overall
U= Gold flash over 30~50 μ " nickel overall

Material:

- Insulator: PPS UL94V-0
- Color: Black
- Contact: Phosphor Bronze

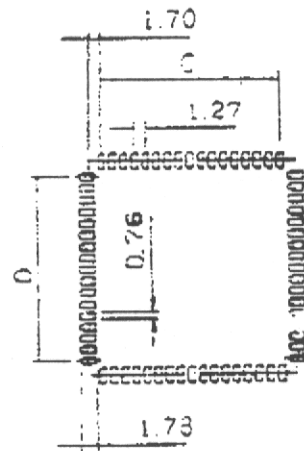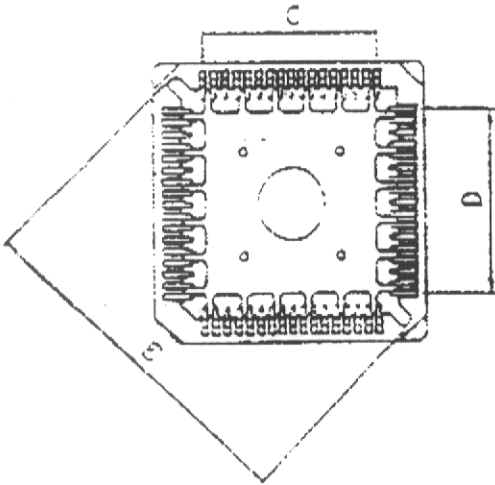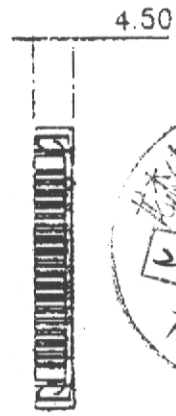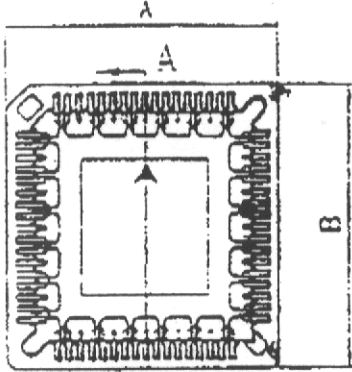

| NO. of Contacts | A \pm 0.2 | B \pm 0.2 | C \pm 0.1 | D \pm 0.1 | E \pm 0.2 |
|-----------------|-------------|-------------|-------------|-------------|-------------|
| 20 | 15.66 | 15.66 | 5.08 | 5.08 | 17.28 |
| 28 | 18.20 | 18.20 | 7.62 | 7.62 | 20.87 |
| 32 | 18.20 | 20.74 | 7.62 | 10.15 | 22.75 |
| 44 | 23.28 | 23.28 | 12.70 | 12.70 | 28.05 |
| 52 | 25.82 | 25.82 | 15.24 | 15.24 | 31.65 |
| 68 | 30.90 | 30.90 | 20.32 | 20.32 | 38.83 |
| 84 | 35.98 | 35.98 | 25.40 | 25.40 | 46.00 |



| | | | | | |
|--------------------------------|----------|-------------|------|---------------------------------|--------------------------|
| 龍泰精工股份有限公司 LECO CORPORATION | | | | APPROVED BY: <i>[Signature]</i> | PART NO.: 8111-***ABC |
| GENERAL TOLERANCE | | | | CHECKED BY: <i>[Signature]</i> | TITLE: SMT PLCC CONN. |
| X. \pm | | X. \pm Z' | | DRAW BY: Angela 10/28/98 | DRAWING NO.: 811105S |
| .X \pm $\frac{0.30}{012}$ | | .X' \pm | | UNITS: mm | SCALE: 1:1 |
| .XX \pm $\frac{0.20}{008}$ | | .XX \pm | | SHEET: 1/1 | REV: A |
| .XXX \pm $\frac{0.10}{004}$ | | .XXX \pm | | | |
| REV | ECO. NO. | CHG | APPD | | |