


(TLRC280)

LED FOR PLASTIC FIBER

- Luminous spectra are suited to plastic fiber
: $\lambda_p = 660\text{nm}$ (TYP)
- High coupling efficiency with fiber : $P_f = -8.5\text{dBm}$ (TYP)
- High speed application is possible. : $f_c = 7\text{MHz}$ (TYP)

PIN CONNECTION

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Diode Power Dissipation	P_D	140	mW
Forward Current	I_F	70	mA
Pulse Forward Current (Note)	I_{FP}	300	mA
Reverse Current	V_R	4	V
Operating Temperature Range	T_{opr}	$-30 \sim 85$	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-40 \sim 85$	$^\circ\text{C}$


(Note) Pulse Width = 1ms, duty = $\frac{1}{20}$ OPTO-ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Optical Output at Fiber End (Note)	P_f	$I_F = 30\text{mA}$	-11.5	-8.5	—	dBm
Reverse Current	I_R	$V_R = 4\text{V}$	—	—	100	μA
Forward Voltage	V_F	$I_F = 30\text{mA}$	—	1.85	2	V
Peak Emission Wavelength	λ_p	$I_F = 30\text{mA}$	—	660	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 30\text{mA}$	—	30	—	nm
Half Value Angle	θ	$I_F = 30\text{mA}$	—	± 40	—	$^\circ$
Capacitance	C_T	$V = 0\text{V}, f = 1\text{MHz}$	—	80	—	pF
Cut-off Frequency	f_c	$I_F = 30\text{mA DC} + 6\text{mA p-p}$ Output : -3dB down to 100kHz	—	7	—	MHz

(Note) Plastic fiber used : Fiber length 0.5m, core diameter $980\mu\text{m}$, NA 0.5 $P_f(\text{dBm}) = 10 \cdot \log [P(\mu\text{W}) / 1000(\mu\text{W})]$

When testing this device, it should be kept closely contacted to a fiber.

Unit in mm

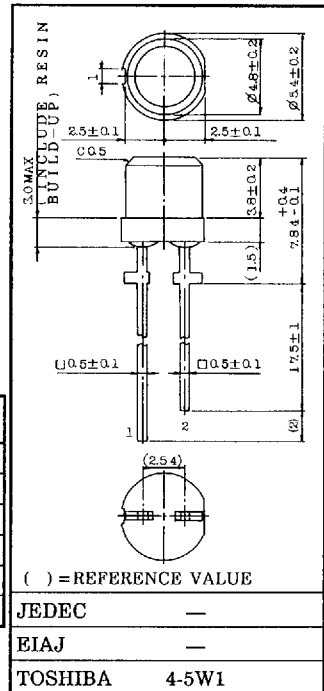





Weight : 0.25g (TYP.)

(TLRC280)





PRECAUTION

Please be careful of the followings.

1. Soldering temperature : 260°C MAX. Soldering time : 3s MAX.
(Soldering portion of lead : at above 2.5mm from the body of the device)
2. If the lead is formed, the lead should be formed at a distance of 2.5mm from the body of the device.
Soldering shall be performed after lead forming.

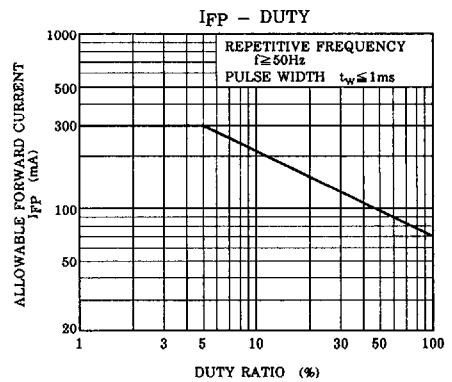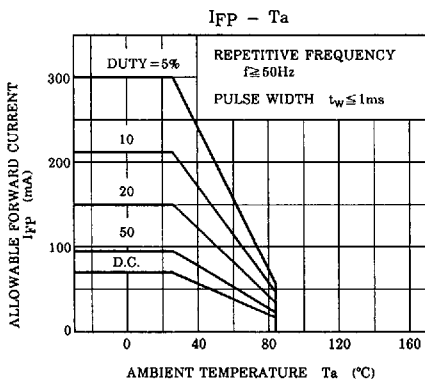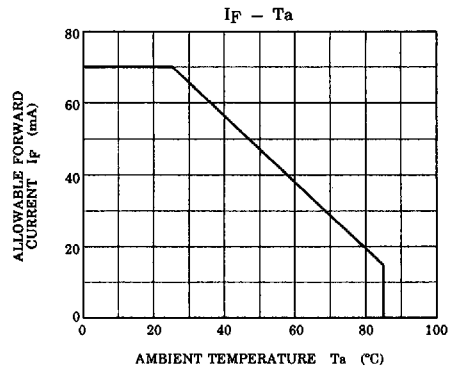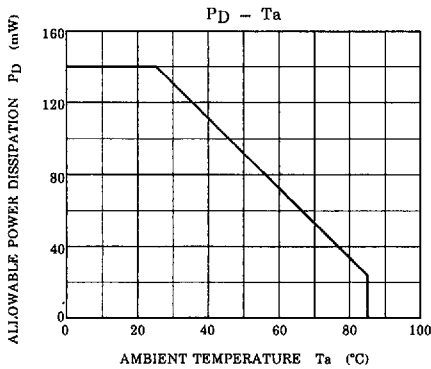

(TLRC280)

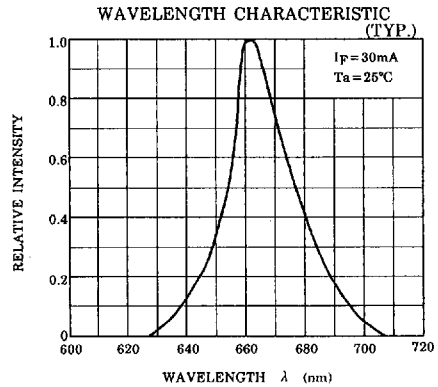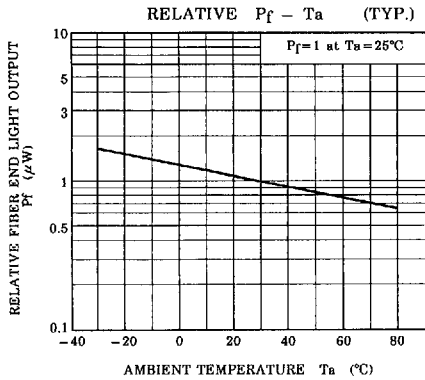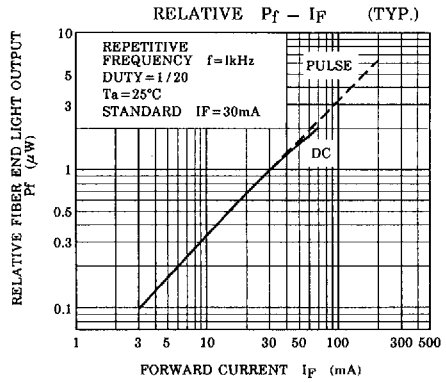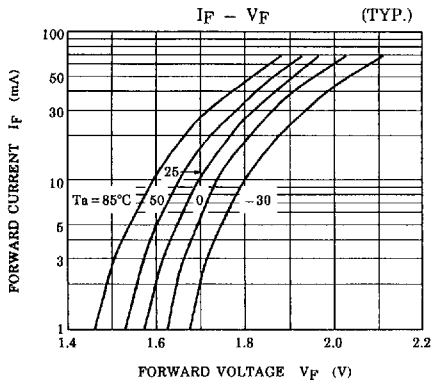

DIRECTIONAL SENSITIVITY CHARACTERISTIC (TYP.)
 (TYP.)
 ($T_a = 25^\circ\text{C}$)
 ($I_F = 30\text{mA}$)

